



LOW BOY REFRIGERATOR SELF-CONTAINED -LB- SERIES

ITEM # _____


QTY. _____

PROJECT:

CONSULTANT:

33" DEEP UNITS

CONSTRUCTION FEATURES

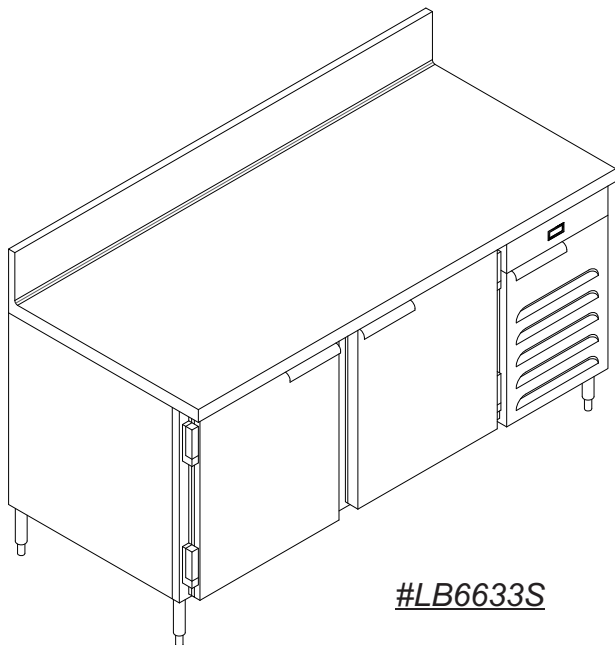

#LB6633S

- **TOP** - ONE PIECE 14 GA. TYPE 300 STAINLESS STEEL WITH CHANNEL EDGE FRONT AND SIDES TURN DOWN WITH 6" HIGH BACKSPLASH.
- **EXTERIOR REAR AND BOTTOM** - 20 GA. GALVANNEAL.
- **FRONT AND ENDS** - 20 GA. STAINLESS STEEL
- **INTERIOR** - MANUFACTURED WITH COVED CORNER CONSTRUCTION USING ALL TYPE 300 STAINLESS STEEL. ALL UNITS FULLY INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE.
- **DOORS** - 20 GA. STAINLESS STEEL WITH STAINLESS STEEL INTERIOR AND INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE. DOORS ARE SELF CLOSING AND USE REMOVABLE SNAP-IN GASKETS FOR EASY CLEANING AND REPLACEMENT.
- **REFRIGERATION SYSTEM** - ALL REFRIGERATORS USE R-448A REFRIGERANT. COMPRESSOR WITH HOT GAS CONDENSATE EVAPORATOR IS MOUNTED AT THE RIGHT END. BLOWER IS INSTALLED WITH EXPANSION VALVE. THERMOSTAT IS MOUNTED IN APRON. REFRIGERATOR MAINTAINS A TEMPERATURE IN COMPLIANCE WITH NSF.
- **LEGS** - 2" DIAMETER HEAVY DUTY ADJUSTABLE (6"-8") STAINLESS STEEL.
- **ELECTRICAL CONNECTION** - 115 VOLTS, 60 CYCLE, SINGLE PHASE. ALL UNITS PROVIDED WITH 6'-0" CORD AND PLUG-NEMA 5-15P.

OPTIONS AND ACCESSORIES

- | | | |
|--|---|---|
| ☐ 180° ROLLED EDGE | ☐ 5" DIAMETER POLY CASTERS | ☐ 208 VOLT SINGLE PHASE |
| ☐ BULLNOSE EDGE | ☐ PLASTIC LAMINATE FRONT | ☐ 208 VOLT THREE PHASE |
| ☐ INVERTED "V" EDGE | ☐ PLASTIC LAMINATE LEFT END | ☐ 50 CYCLE FOR SPECIAL APPLICATION |
| ☐ RAISED ROLLED EDGE | ☐ PLASTIC LAMINATE RIGHT END | ☐ PAN SLIDES (ON 24" DOORS ONLY) |
| ☐ RAISED CHANNEL EDGE | ☐ PLASTIC LAMINATE REAR | ☐ SPECIAL BODY HEIGHT |
| ☐ SPECIAL HEIGHT SPLASH: _____ | ☐ DIAL THERMOMETER | ☐ CYLINDER LOCKS |
| ☐ LEFT END RETURN SPLASH | ☐ FULL LENGTH RECESSED HANDLES | ☐ FLANGED FEET |
| ☐ RIGHT END RETURN SPLASH | ☐ COATED BLOWER COIL | ☐ S/S KICK PLATES |
| ☐ 1/2" THICK POLY CUTTING BOARD | ☐ SLIDING GLASS DOOR | ☐ S/S CHANNEL BASE |
| ☐ 1/2" THICK RICHLITE CUTTING BOARD | ☐ HINGED GLASS DOORS | ☐ OMIT BACKSPLASH (TURNDOWN EDGE) |
| ☐ STAINLESS STEEL BACK | ☐ 6" DEEP SINK OVER COMP. HOUSING | ☐ OTHER: _____ |
| ☐ LEFT SIDE MECHANICAL COMP. | ☐ 12 X 20 HOT FOOD WELL OVER COMP. HOUSING | |

NOTE: OTHER OPTIONS AND ACCESSORIES AVAILABLE. PLEASE SEE ACCESSORY PAGE AT THE END OF THIS SECTION.



EMI Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-25**



LOW BOY REFRIGERATOR SELF-CONTAINED -LB- SERIES


ITEM # _____

QTY. _____

PROJECT: _____

CONSULTANT: _____

33" DEEP UNITS

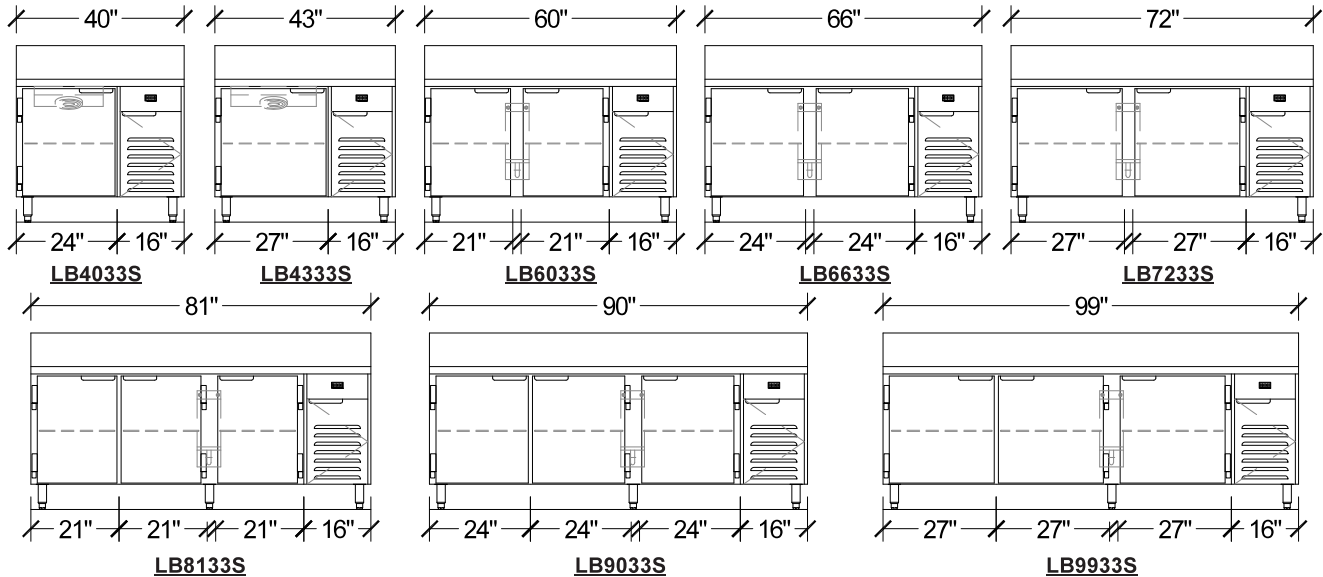

SPECIFICATION DATA

MODEL	DOORS	OVERALL LENGTH	CUBIC FEET	COMP. HP	VOLTAGE	AMPS	SHELVES	CRATED WEIGHT
LB4033S	1 - 24"	40	7.30	1/4	115/60/1	4.0	1	345
LB4333S	1 - 27"	43	8.32	1/4	115/60/1	4.0	1	375
LB4333SM	1 - 27"	43	9.65	1/4	115/60/1	4.0	1	390
LB6033S	2 - 21"	60	13.92	1/4	115/60/1	4.8	2	425
LB6633S	2 - 24"	66	15.96	1/4	115/60/1	4.8	2	430
LB6633SM	2 - 24"	66	17.02	1/4	115/60/1	4.8	2	430
LB7233S	2 - 27"	72	18.00	1/4	115/60/1	4.8	2	440
LB8133S	3 - 21"	81	21.56	1/4	115/60/1	4.8	3	495
LB9033S	3 - 24"	90	24.62	1/3	115/60/1	6.2	3	545
LB9033SM	3 - 24"	90	26.25	1/3	115/60/1	6.2	3	545
LB9933S	3 - 27"	99	27.68	1/3	115/60/1	6.2	3	600

MECHANICAL DATA



LEGEND



CONDENSING UNIT WIRED TO JUNCTION BOX/HARNESS

JB

JUNCTION BOX/HARNESS WITH 6'-0" CORD AND PLUG (NEMA 5-15P)

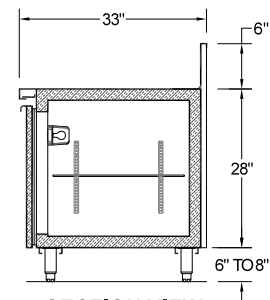

SECTION VIEW



EMI

Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005

PHONE: (973) 423-0226 FAX: (973) 423-1638

TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-26**