

I-PRO 3 FROZEN GRANITA DISPENSERS

Project

Date

Models

- I-PRO 3M UV
- I-PRO 3M UV light panel
- I-PRO 3E UV
- I-PRO 3E UV light panel

Item #

Quantity




**Model I-PRO 3M UV
with light panel**

Features

- Most advanced professional slush, sorbet, and granita machine in the world. High performance, ultramodern design, and user-friendly.
- (3) 2.9 gallon (11 L) insulated bowls with either mechanical or electronic control board and timer, and light panel.
- Insulating technology increases cooling power, saves energy and money, and reduces external condensation.
- Transparent bowl encourages impulse purchasing.
- Manual defrost mode.
- Efficient safety mechanism is activated when cover is lifted. All moving parts automatically and immediately stop.
- Lockable lid.
- Adjustable product consistency.
- Exclusive nUV LED system for bowl sanitation.
- Perfect solution for restaurants, coffee shops, bars, amusement parks, convenience stores, kiosks, and much more.
- All models are certified NSF-6 safe for milk.

I-PRO 3 FROZEN GRANITA DISPENSERS

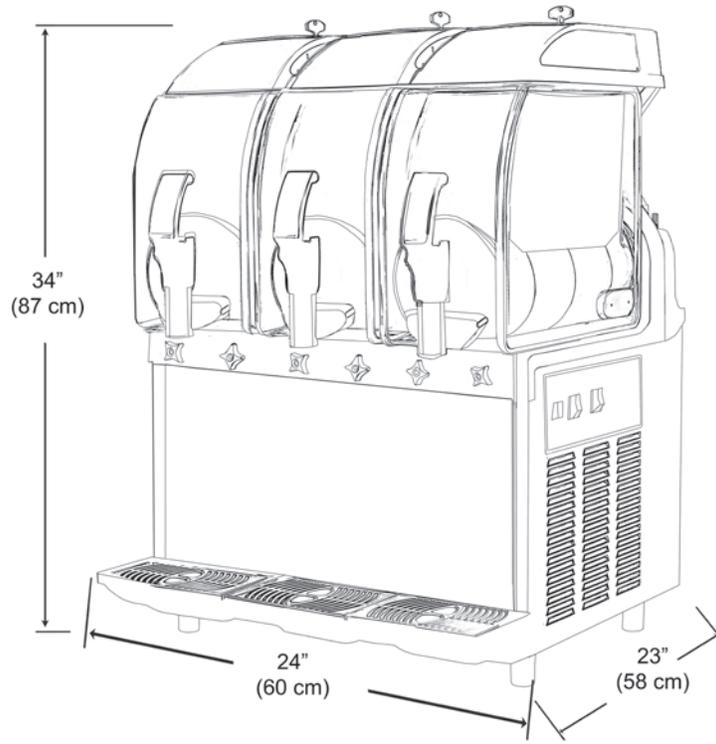

Model I-PRO 3M UV

NSF-6



MODEL	DESCRIPTION	ELECTRICAL	PRODUCT DIMENSIONS (H X W X D)	SHIP DIMENSIONS (H X W X D)	PRODUCT WEIGHT	SHIP WEIGHT
I-PRO 3M UV** (1206-030)	(3) 2.9 gallon (11 L) insulated bowls, Mechanical control and timer, black finish	115V / 60 Hz 1.3 kW / 14.4A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63 cm)	179 lbs. (81 kg)	209 lbs. (95 kg)
I-PRO 3M UV** light panel (1206-031)	(3) 2.9 gallon (11 L) insulated bowls, Mechanical control and timer, lighted panel, black finish	115V / 60 Hz 1.3 kW / 14.4A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63 cm)	179 lbs. (81 kg)	209 lbs. (95 kg)
I-PRO 3E UV** (1206-032)	(3) 2.9 gallon (11 L) insulated bowls, Electronic control and timer, black finish	115V / 60 Hz 1.2 kW / 12A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63 cm)	179 lbs. (81 kg)	209 lbs. (95 kg)
I-PRO 3E UV** light panel (1206-033)	(3) 2.9 gallon (11 L) insulated bowls, Electronic control and timer, lighted panel, black finish	115V / 60 Hz 1.2 kW / 12A / 1Ph	34" x 24" x 23" (87 cm x 60 cm x 58 cm)	36" x 21" x 25" (92 cm x 54 cm x 63 cm)	179 lbs. (81 kg)	209 lbs. (95 kg)

Refrigeration: R449A

Note: Operate at room temperature between 75 - 90° F (24 and 32° C).

Note: Clearance of 8" (20 cm) required on all sides.

Note: Mixture must maintain a sugar content near 14%.

A lower concentration could seriously damage the mixing parts and gear motors.

* Electrical: NEMA 5-15P line cord included.

** Electrical: NEMA 5-20P line cord included.

Grindmaster™ 4003 Collins Lane, Louisville, KY 40245 USA

Tel: +1.502.425.4776 / 800.695.4500 (USA & Canada only) • Fax: +1.502.425.4664 • www.grindmaster.com

© 2021 Grindmaster™ PRINTED IN USA | 0721 Form # CC-103-02