

VIENNA COUNTER TOP COLD DISPLAY

PROJECT: _____
ITEM: _____ **QUANTITY:** _____

MODEL # VICD-CV CT CURVED GLASS

SPECIFICATIONS

The Vienna Series VICD-CV CT is a refrigerated full service display style unit designed for counter top application, featuring insulated curved front glass, top and side panels. Units are standard in stainless steel with an adjustable shelf, lights and sliding rear see-through access doors.



Available lengths: ☐ 31 1/2" ☐ 44 1/4"

Available depths: ☐ 32 5/8"

Available heights: ☐ 28 3/8"



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



STANDARD FEATURES

- Curved Glass Profile
- 304 Stainless Steel Exterior
- Insulated Glass Front, Top and Side Panels
- Sliding Rear See-Through Access Doors
- (1) Adjustable Glass Shelf with LED Light
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with Rear Compressor Housing
- Fan Assisted Cooling System
- Lift-Up Evaporator
- Tilt-Out Front Glass
- 6' Cord & Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- Built in Condensate Evaporator Pan (No Floor Drain Required)

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Mirrored Sliding Rear Access Doors
- ☐ 5 Year Compressor Warranty

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
VICD2-20-R-CV-SC CT	31 1/2	32 5/8	28 3/8	1/5	115	3.8	5-15P	440	134A
VICD3-20-R-CV-SC CT	44 1/4	32 5/8	28 3/8	1/4	115	4.8	5-15P	484	134A



CALL TOLL FREE: 800-525-3692 (609-714-2330)



FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055




INDUSTRIES, INC. v1_31_17

MODEL # VICD-CV CT CURVED GLASS

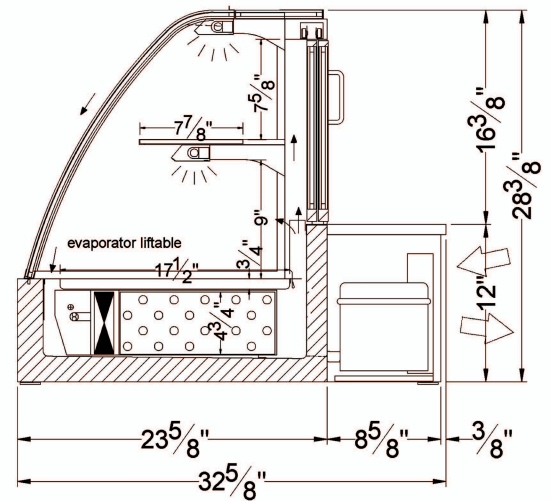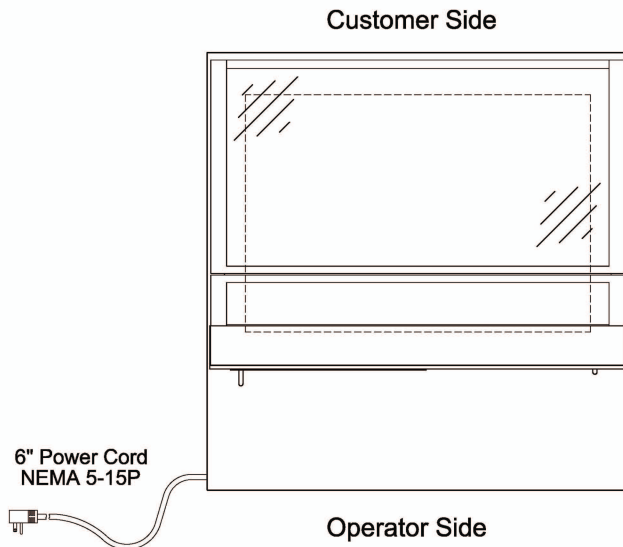


Electrical & Plumbing locations

2 1/2" HOLE REQUIRED FOR
COOLING AND DRAINAGE LINES

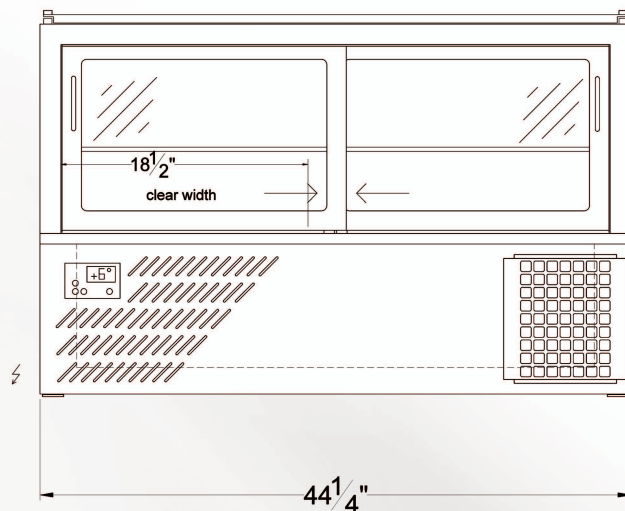

VICD3-20-R-CV-SC-CT

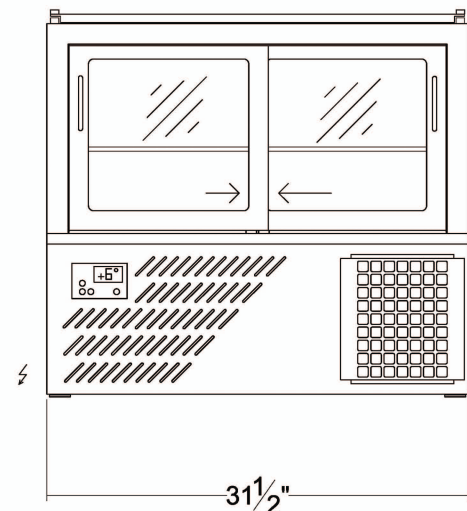

VICD2-20-R-CV-SC-CT

RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55%RH. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone.

Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature of the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055