





Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

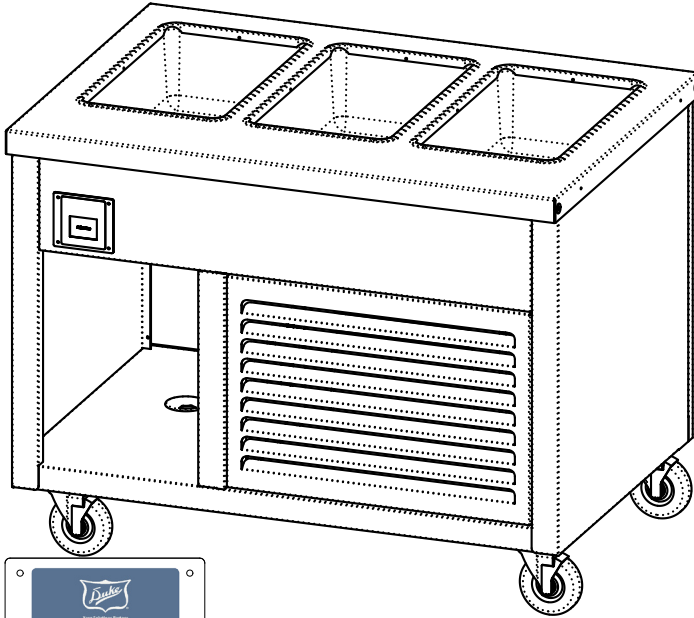

TFCP-46-N7

OPTIONS:

- ☐ Basic Control
- ☐ Internal Locking device
- ☐ 14 gauge tops
- ☐ * Condensate evaporator
- ☐ False Bottom
- ☐ Foodshields
- ☐ Trayslides
- ☐ 6" adjustable Stainless steel legs
- ☐ 8' or 10' cord and plug
- ☐ Food pans - see Top Equipment section in price guide
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint colors
- ☐ Kickplates SS & PG
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34".

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1310 R290 Thurmduke SS Cold Mech N7

Specification subject to change



WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmduke™ Serving Systems -Flush Mount Cold Pan Mechanically Cooled - Meets NSF Standard 7 - 8" Deep

- **TFCP-32-N7** 2 Sections 32" length unit
- **TFCP-46-N7** 3 Sections 46" length unit
- **TFCP-60-N7** 4 Sections 60" length unit
- **TFCP-74-N7** 5 Sections 74" length unit
- **TFCP-88-N7** 6 Sections 88" length unit

TOP:

- 16 gauge, 300 Series stainless steel
- Edges flanged down 2" at 90° - all four sides
- Inside edges flanged down 90° against liner

COLD PAN LINER:

- 300 Series stainless steel
- Accepts up to 6" deep food pans
- Insulated on all four sides and bottom
- Drain for each well manifolded to one location

REFRIGERATION:

- 120 VOLT - 1 Phase
- Refrigerant R290 
- Condensing unit below top on operator's right
- Hinged louvered panel over refrigeration area
- 6' electric cord and plug - NEMA 5-15
- Necessary controls for operation

BODY:

- ☐ Choice of available powder coat paint colors
- ☐ Stainless steel body
- Operator's side open to bottom shelf
- Customer side and ends fully enclosed
- Bottom shelf paint grip or stainless steel to match body

CONTROL:

- Touchscreen control left justified in apron
- Simple touch screen control with 3 presets LOW/MED/HIGH temperature settings.

AGENCY LISTINGS:





UL/ANSI NSF 7






US LISTED

Thurmaduke®

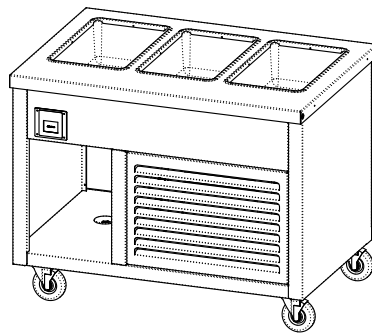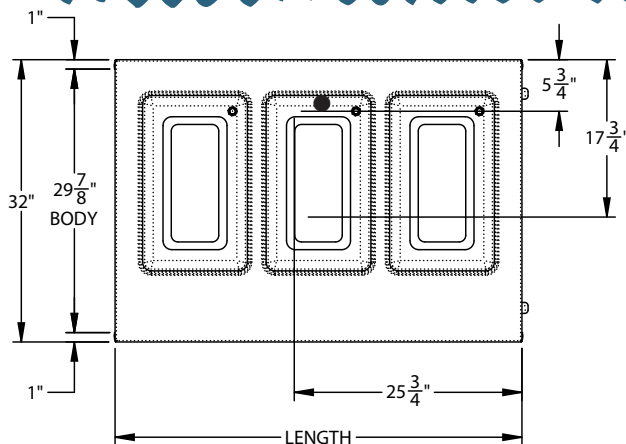


Control Specification

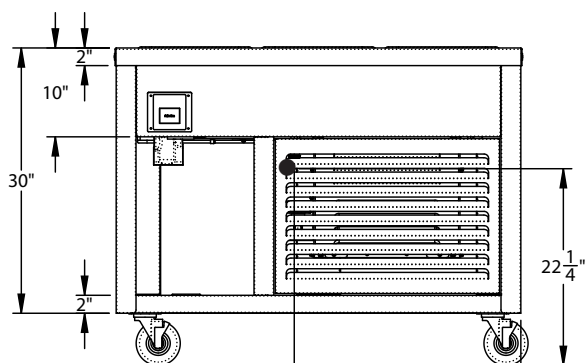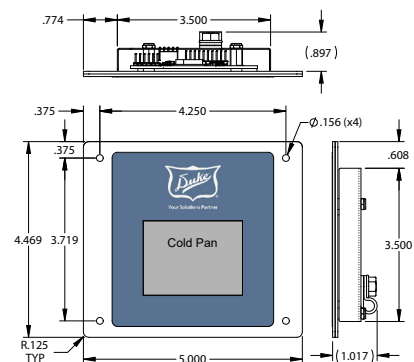

LEGEND 25 3/4"

- ▲ - ELECTRICAL CONNECTION - 6' Cord & Plug
- - DRAIN CONNECTION

Control Cutout

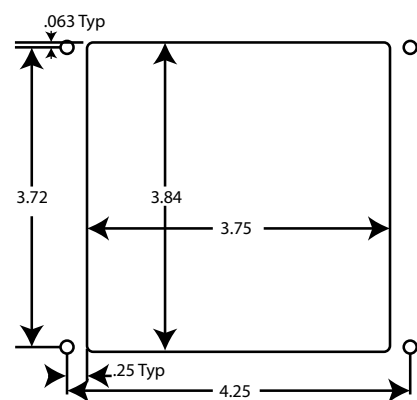

DIMENSIONS:

Model	Length		Width		Height		Cube ft. crated	Weight	
	in	cm	in	cm	in	cm		lbs	kg
TFCP-32-N7	32	81.3	32.00	81.3	36	91.4	27.6	285	129.3
TFCP-46-N7	46	116.8	32.00	81.3	36	91.4	37.7	310	141.0
TFCP-60-N7	60	152.4	32.00	81.3	36	91.4	47.9	386	175.5
TFCP-74-N7	74	188.0	32.00	81.3	36	91.4	58.1	477	216.8
TFCP-88-N7	88	223.5	32.00	81.3	36	91.4	68.4	575	260.8

FREIGHT CLASS: 150

ELECTRICAL SPECIFICATIONS: *If optional condensate evaporator add 300 Watts, 2.6 Amps

Model	R290 	120 Volt/NEMA 5-15			Model	R290 	120 Volt/NEMA 5-15		
	Grams	Watts	Amps	NEMA		Grams	Watts	Amps	NEMA
TFCP-32-N7	90	568	3.9	5-15	TFCP-74-N7	130	816	6.8	5-15
TFCP-46-N7	100	468	3.9	5-15	TFCP-88-N7	140	816	6.8	5-15
TFCP-60-N7	120	816	6.8	5-15					



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com