

ELECTRIC COUNTER TILTING ROUND SKILLET



ECTRS-16S

OPERATION SHALL BE BY:

Electric heating elements equipped for operation on:

208 VAC, 1 or 3 Phase, 50/60 Hz

220 VAC, 1 or 3 Phase, 50/60 Hz

240 VAC, 1 Phase, 50/60 Hz

380/220 VAC, 3 Phase, 4 wire, 50/60 Hz

415/240 VAC, 3 Phase, 4 wire, 50/60 Hz

OPTIONS & ACCESSORIES AT ADDITIONAL COST

380, 415, 480 or 600 VAC, 3 Phase, 50/60 Hz

30" wide, open leg base, stainless steel kettle stand with sliding shelf (S-30)

Single pantry rinse spray head with 68" hose (SP-RSH)

Steam pan insert (SPI-16)

30" wide, open leg base, stainless steel kettle stand with sliding drain pan and stationary

Double pantry rinse spray head with 68" hose (DP-RSH)

Etched liter markings (LMS-60)

drain (SD-30-16)

Correctional Package

One piece lift off stainless steel cover (SC-16)

Single pantry faucet with 12" swing spout (SF-12)

Faucet bracket (FB)

Double pantry faucet with 12" swing spout (DF-12)

STANDARD CONSTRUCTION SPECIFICATIONS

Crown's electrically heated counter tilting skillet.

Pan shall be fitted with a stainless steel tilt handle with heat resistant knob for tilting the pan forward for complete removal of contents.

The ECTRS-16S is constructed of one piece coved corner, 10 gauge stainless steel with a #4 exterior finish and a polished interior with etched gallon markings.

A tilt interlock shall prevent inadvertent tilting of the pan.

The pan sides slope outward to facilitate access to the cooking surface.

Controls shall be integrally mounted and shall include a power switch, pilot light, thermostat, safety thermostat and high temperature cut-off.

Cooking surface shall be 3/8" (9.5 mm) thick stainless steel plate, fitted with clamped on electric heating elements rated at 7.5 kW for even heat transfer over entire cooking surface.

The skillet shall operate in a temperature range of 160°F to 450°F (45°C to 232°C)



Pan shall be fitted with side pivots mounted in sealed stainless steel clad consoles mounted on a 10 gauge 304 stainless steel base with #4 finish.

The skillet can be mounted on a 30" (762 mm) wide stainless steel stand.



c-CSA-us Certified and NSF Approved.



Approval Notes:

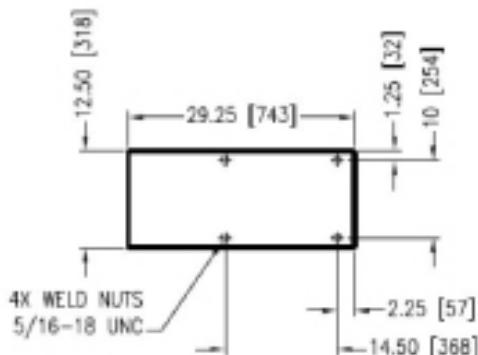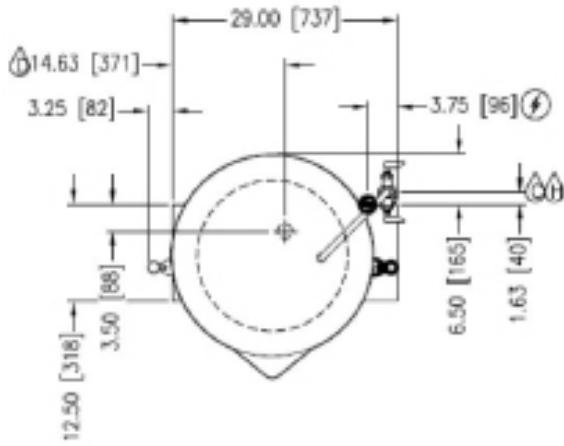

FRONT OF APPLIANCE MOUNTING PATTERN

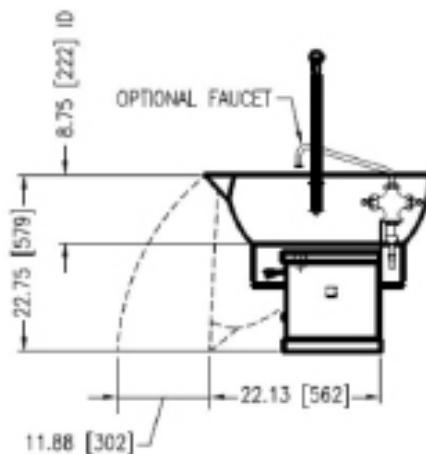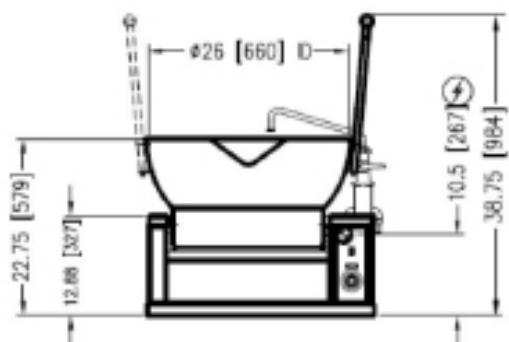

SERVICE CONNECTIONS

- ① - ELECTRICAL CONNECTIONS: to be specified on data plate
- ② - DRAIN: 1 1/2" - 11 1/2 NPT
- ③ - COLD WATER: 3/8" O.D. tubing to faucet (OPTIONAL)
- ④ - HOT WATER: 3/8" O.D. tubing to optional faucet (OPTIONAL)

ELECTRICAL CHARACTERISTICS

Electrically heated, round, counter tilting skillet operating at 0 psi (0kPa) and rated at 7.5 kW

MODEL	kW	PHASE	AMPS PER LINE						
			208V	220V	240V	380V	415V	480V	600V
ECTRS-16S	7.5	1	36.0	34.1	31.3	N/A	N/A	N/A	12.5
		3	20.8	19.7	18.1	11.4	10.4	9.0	7.2

SPECIFICATIONS

MODEL	CAPACITY		SHIPPING WEIGHT	MINIMUM CLEARANCE	
ECTRS-16S	16 Gallon	60 Liter	249 LBS. [113 KG]	SIDES BACK	0 0

INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.

