



Your Solutions Partner

# Specifications

F.O.B. Sedalia, Missouri 65301



613Q-G1

## OPTIONS:

- ☐ Stainless steel interior
- ☐ 27" stainless steel angular legs
- ☐ Stainless steel back enclosure panel
- ☐ Seismic feet
- ☐ Field stacking kit
- ☐ Common gas manifold
- ☐ 48" flexible disconnect, w/restraining device
- ☐ Down draft hood
- ☐ Flu deflector
- ☐ Casters
- ☐ Extra oven racks
- ☐ Prison package - tamper proof screws, lexan hinged cover with lockable clasp
- ☐ Extended warranty

DUKE MANUFACTURING CO.

2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1078 613Q-G1 Single-Gas

## Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

MODEL:

### Duke Convection Ovens - "Q" Series Single Deck - Standard Depth - Gas

- **613Q-G1** Single deck, standard depth

### STANDARD FEATURES

- 6 racks/13 rack positions
- Porcelain interior finish
- 50/50 stainless steel independent doors
- Double pane glass both doors
- 27" angular painted/adjustable legs
- 2 Speed motor

### OVEN SECTION

- Stainless steel front, sides and top
- 1 1/2" insulation on bottom, sides and back
- 3" insulation on top
- Interior lights

### BURNER SYSTEM

- 40,000 BTU
- High output atmospheric burner system
- Main gas shut off valve
- Built-in gas regulator

### OVEN CONTROLS

- ☐ "V" - Basic snap action thermostat (200°-500°F), 60 minute electric dial timer with continuous sound buzzer, 2-speed fan
- ☐ "XX" - Solid state digital time and temperature controls, 12-hour countdown timer, **Cook and Hold** feature, 2-speed fan, Pulse fan capability

Certifications



Specification subject to change




**WARNING** For CA residents: go to  
www.dukemfg.com/prop65 for prop 65 warning


# DUKE CONVECTION OVENS

## "Q" SERIES


### SINGLE DECK - GAS - STANDARD DEPTH

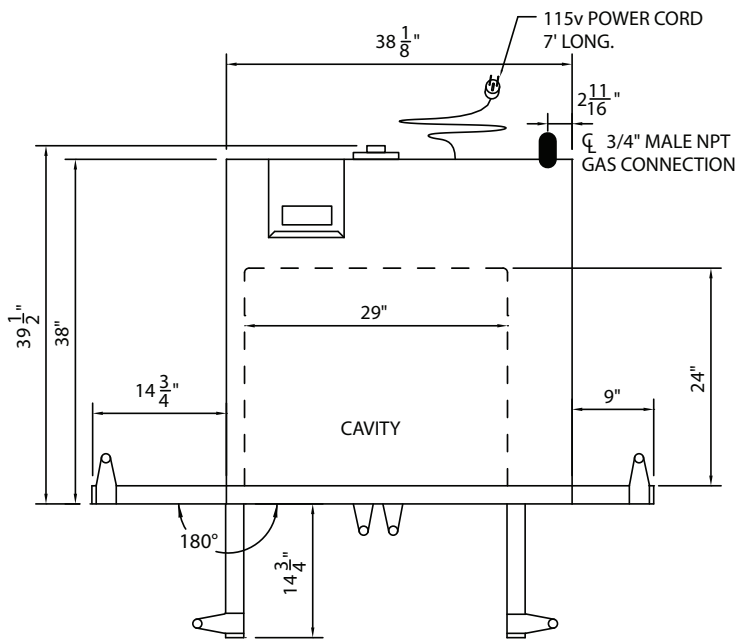

**TOP VIEW**

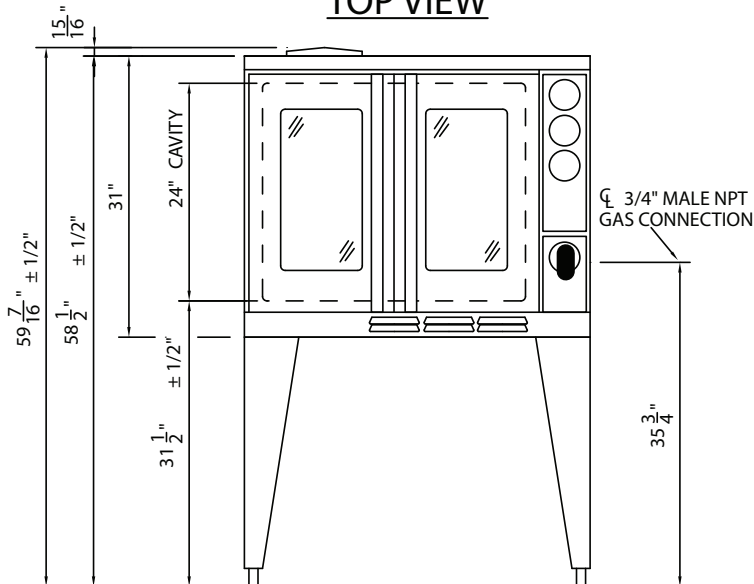

**FRONT VIEW**

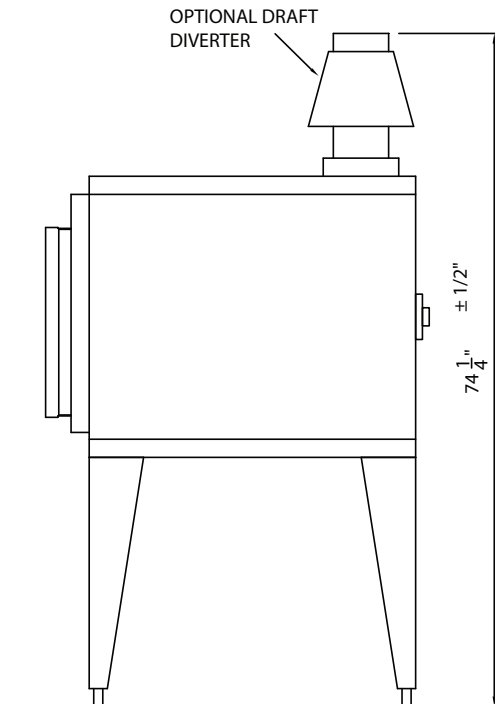

**RIGHT SIDE VIEW**

Gas Specifications		
<b>613Q-G1</b>	<b>BTU/Hour</b>	40,000
Regulated gas pressure required 3.5" WC natural / 10" WC propane		
Combustible surface clearance - 1" side, 1" rear, 6" floor		
Gas connection		
3/4" Gas connection		
Electrical requirements: 3.5 Amps/ 115V		
Standard 115V units supplied with 5' cord and plug		

Specify gas type

Specify altitude over 2000 feet

#### DIMENSIONS:

Model	Height		Width		Depth		Cube ft. crated	Weight	
	in.	cm	in.	cm	in.	cm		lbs.	kg
613Q-G1	39.5	100.3	38	96.5	60.	152.4	59.6	540	245.5

#### Freight Class: 85



**Duke Manufacturing Co.**  
2305 N. Broadway  
St. Louis, MO 63102

Phone: 314-231-1130  
Toll Free: 1-800-735-3853  
Fax: 314-231-5074

[www.dukemfg.com](http://www.dukemfg.com)