



Rotating Hybrid
Gas and Wood Fired Oven
Cupola Dome Mosaic - CM
FGRi130 Morello Forni



STANDARD FEATURES

- Hybrid (wood/gas) Cupola Mosaic Dome Oven with rotating cooking bedplate chamber.
- Constructed from high refractory premium grade alumina with heavy metal enclosure and stand.
- Oven walls average 7" thickness with completely sealed wall enclosures.
- Operates gas only, wood only, or combination wood and gas.
- Double gas burner system in stainless steel.
- Internal dome burner and under bedplate gas burner system.
- Thermal insulation made of mineral fibre with high insulating properties; minimum 6" from top to bottom requiring 3" clearance to combustible materials.
- INTELTOUCH-MF10 Touch Screen Electronic Control System.
- Independent intuitive digital safety controls.
- Programmable time, speed, temperature and flame control system.
- Optimized performance and large productivity.
- Emergency push button to stop.
- 220/60/1

OPTION

Natural Stone Mosaic Colors

ITEM:

PROJECT:




DATE:

Rotating Hybrid
Gas and Wood Fired Oven
Cupola Dome Mosaic - CM
FGRi130



Rosito Bisani
SPECIALTY FOOD SERVICES EQUIPMENT

**Rotating Hybrid
Gas and Wood Fired Oven
Cupola Dome Mosaic - CM
FGRi130 Morello Forni**

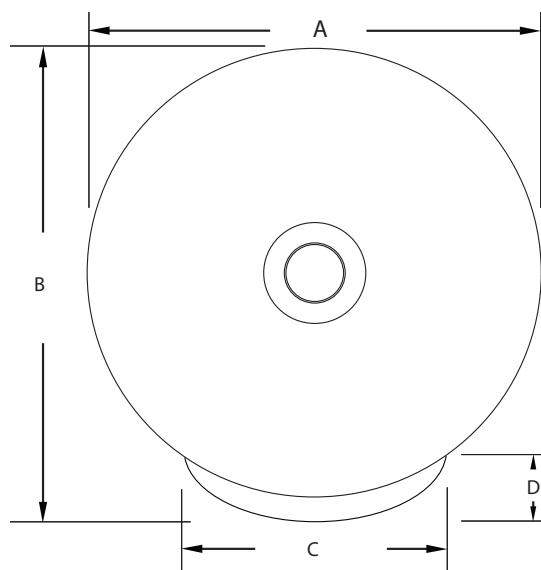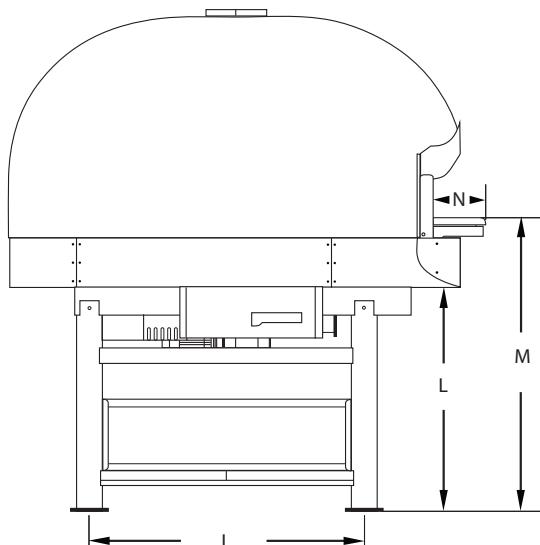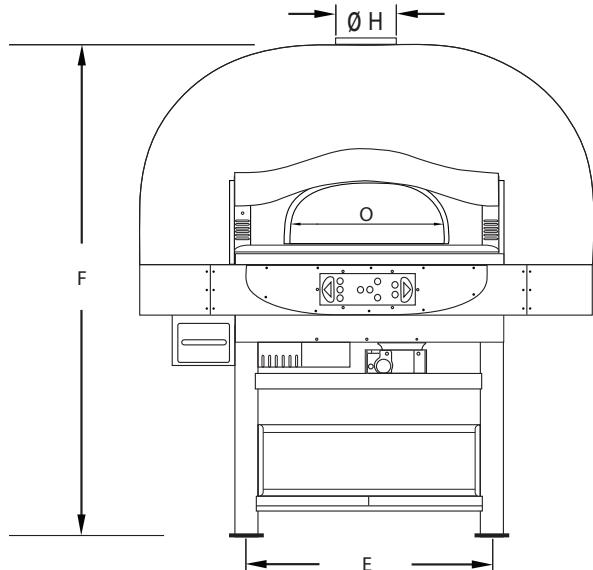

FLUE CONNECTION

All ovens are provided with an exhaust flue collar $\frac{1}{2}$ " or $2\frac{1}{2}$ " in height and 8" or 10" nominal diameter depending on model. The flue collar (ØH) is located on oven top to provide a secure connection to the chimney. The oven flue collar is designed to be connected to chimney listed to UL-103HT. When working on gas only ovens, the oven is suitable for connection to Type B Gas Vent when used with the draft hood. When burning wood, an independent Flue evacuation system is required.

ELECTRICAL CONNECTION

Verify the power supply has the same rating as the oven.

AIR SUPPLY

These ovens require make-up air to replace combustion air and excess air taken out by the flue. Always check for adequate openings to allow required make-up air flow in. Check table included in operations manual.

Model/ Specifications	FGRi130 (51)	Cooking Time	
		Capacity	(10) x 11"
Power	220/60/1		
Gas Fitting (inches)	$\frac{3}{4}$		
BTU	169,000		
Weight (lbs.)	6,173		
Individual Pizza		2 ~ 3 minutes	
Pan Pizza		4 ~ 6 minutes	

Model/ Dimension (inches)	A	B	C	D	E	F	ØH	I	L	M	N	O
FGRi130 (51)	83.5	83.5	48	12	45	81	10	49.5	32.5	48	10	29.5

Rosito Bisani Imports, Inc.

940 South La Brea Avenue, Los Angeles CA, 90036
Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444
E-mail: sales@rosito-bisani.com
www.rosito-bisani.com



530 South Henderson Road, Suite F, King of Prussia PA, 19406
Tel: 610-265-5950 • Fax: 888-576-8524

GAS-FIRED



Rosito and Bisani Imports reserve the right to make changes in design specifications and/or to make additional improvements in its products without imposing any obligations upon itself to install them on products previously manufactured. © 2013.