

PROJECT: \_\_\_\_\_

ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_

MODEL # \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

## EXTRA WIDE REACH-IN WARMING CABINET & REFRIGERATOR

### HRSA-1D-S1-EW-HD-HC



### EXCLUSIVE WARRANTY

- ▶ 7 Year Parts, Labor and Compressor
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



### CABINET CONSTRUCTION

- Stainless Steel Exterior
- Aluminum Interior
- Stainless Steel Interior Door Liner
- Warming Cabinet On Top, Refrigerator On Bottom
- Stay-Open Door Feature For Easy Product Loading
- 20 Gauge Stainless Steel Door
- Refrigerator Has Magnetic Door Switch Automatically Activates Interior LED Light
- Warmer Has Magnetic Door Switch Automatically Activates Interior Incandescent Light
- Heavy-Duty Cylinder Locks
- One-Piece, Snap-In Magnetic Door Gaskets
- Low Profile Vertical Door Handles
- Hinged Front Shroud
- Thermal Breaker
- Stainless Steel Breaker Caps
- 4 Silver Freeze Wire Shelves
- 6" High Adjustable Stainless Steel Legs
- 8' Cord And Plug (see electrical data for details)

### FEATURES

- Full Electronic Control With Touchpoint Interface
- Expansion Valve Technology (refrigerator only)
- Insulated Partition Wall Separates Compartments

### REFRIGERATION

- Refrigeration System Uses R290 Refrigerant To Comply With All Environmental Concerns
- Hot Gas Condensate Evaporator
- Automatic Non-Electric, Defrost
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F

### HEATING

- Warming Cabinet Maintains Product Temperature 80°F To 180°F



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)



### OPTIONS & ACCESSORIES

- |                              |                                             |                                                                            |
|------------------------------|---------------------------------------------|----------------------------------------------------------------------------|
| • Stainless Steel Case Back  | • Additional Shelves                        | • Correctional Package                                                     |
| • Stainless Steel Kick Plate | • Tray Slides (type A & A/C)                | • Remote Models* (refrigerators & 6" legs only)                            |
| • Glass Door Models          | • Door Swing Orientation (at time of order) | (refrigerant must be specified at time of order, see note on back on page) |
| • Exterior Door Laminate     | • 6" Casters Or 6" Seismic Legs             |                                                                            |


3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 6/26/25 Printed in the U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

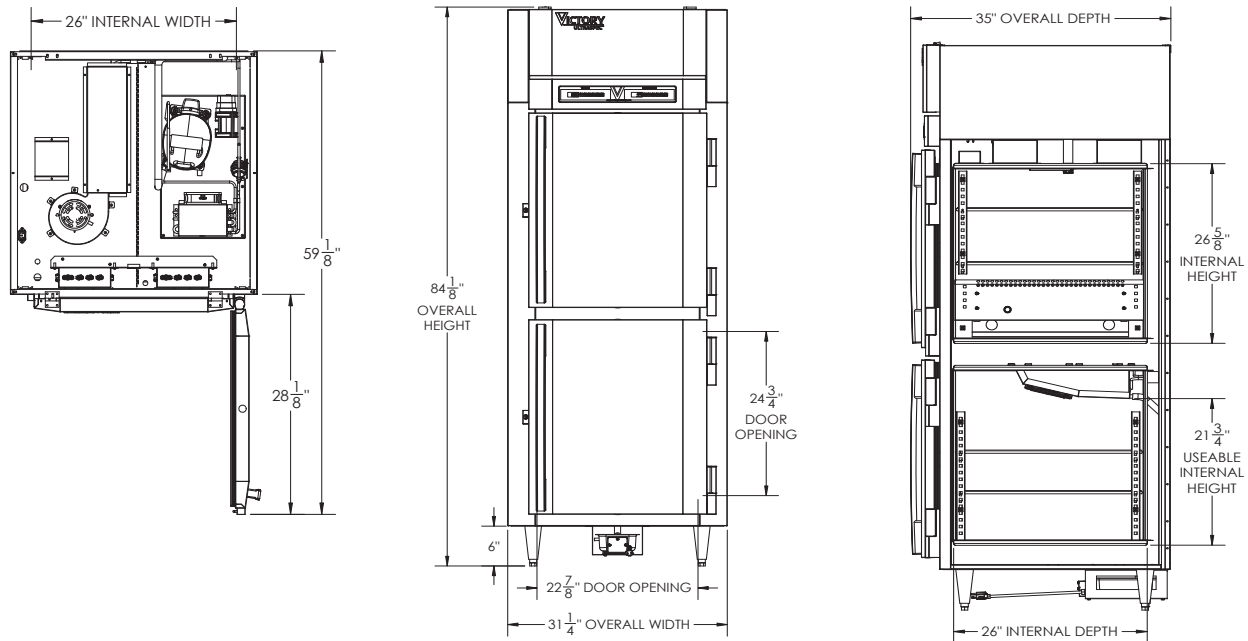

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top clearance is required

| CHARACTERISTICS                 |                   | ELECTRICAL DATA REFRIGERATOR   |                                  | SHIPPING DETAILS                                                                                          |         |
|---------------------------------|-------------------|--------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------|---------|
| Net Capacity R/W                | 10.1 / 10.1       | Cabinet Voltage**              | 115/60/1                         | Height                                                                                                    | 88"     |
| Width, Overall (in.)            | 31 1/4"           | Total Amperes                  | 7.5                              | Width                                                                                                     | 35"     |
| Depth, Overall (with handle)    | 35"               | NEMA Plug (8' cord)            | 5-15P                            | Depth                                                                                                     | 41"     |
| Height Overall (6" legs)        | 84 1/8"           | REFRIGERATION DATA             |                                  | Crated Weight                                                                                             | 454 lbs |
| Depth, Door Open 90°            | 59 1/8"           | Condensing Unit Size, HP       | 1/3                              | *NOTE: Remote unit are field wired and come with 6" legs. Refrigerant must be specified at time of order. |         |
| Door Openings (in.)             | 22 7/8" x 24 3/4" | Refrigerant                    | R290                             |                                                                                                           |         |
| No. Of Doors / Shelves          | 2/4               | Capacity (BTU/HR) (100°F/20°F) | Refrigerator - 1950 Warmer - N/A |                                                                                                           |         |
| ELECTRICAL DATA WARMING CABINET |                   | Heat Rejection (BTU/HR)        | 2925                             |                                                                                                           |         |
| Cabinet Voltage                 | 230/60/1          | Charge (lbs/grams/ounces)      | 0.165 / 75 / 2.65                |                                                                                                           |         |
| Total Amperes                   | 3.7               |                                |                                  |                                                                                                           |         |
| NEMA Plug (8' cord)             | 6-20P             |                                |                                  |                                                                                                           |         |

\*\* NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using either an Eaton, SGF20, or HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 6/26/25 Printed in the U.S.A.