
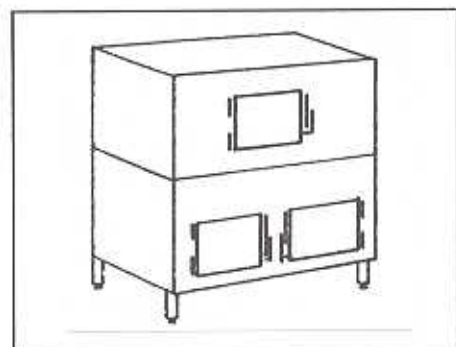


UPRIGHT SERIES REFRIGERATOR DOOR

- ◆ IDEAL FOR CUBE OR FLAKED ICE STORAGE.
- ◆ ONE AND TWO SECTION MODELS AVAILABLE.
- ◆ STAINLESS STEEL TOPS AND DOORS.
- ◆ BUMPER, OVERSIZED REFRIGERATOR OR COAL CHUTE DOORS AVAILABLE.
- ◆ BIN DIVIDERS AVAILABLE.
- ◆ CUSTOM SIZES AVAILABLE; CALL FOR SPECIFICATION ASSISTANCE.

GENERAL SPECIFICATIONS

INTERIOR..... STAINLESS STEEL, TYPE 304, FULLY WELDED SEAMS.
 EXTERIOR..... POLISHED STAINLESS STEEL or STUCCO ALUMINUM.
 GALVANIZED STEEL BACK and BOTTOM (STAINLESS STEEL OPTIONAL).
 INSULATION..... 2" EXPANDED POLYSTYRENE.
 DRAIN..... 1" MPT, CENTER BOTTOM.
 LEGS..... 6" ADJUSTABLE with STAINLESS STEEL FEET.
 REFRIGERATOR DOOR..... STAINLESS STEEL, 13 1/4" x 19 1/2" OPENING.
 INNER DOOR TO CONTROL CUBE FLOW AND SPILLAGE OPTIONAL.

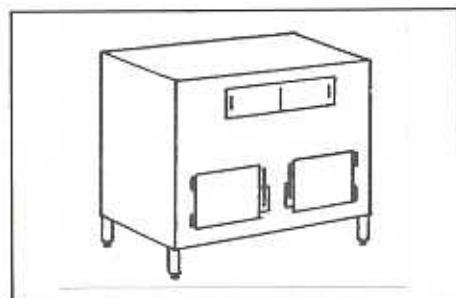

MODEL NUMBER	APPROX STORAGE (lbs.)	WIDTH (in.)	DEPTH (in.)	HEIGHT (in.)
U-475	475	42	31	31
U-800	950	50	32	52
U-1000	1150	60	32	52
U-1475	1475	60	31	60
U-1500	1700	65	42	52
U-2000-2PC	2200	60	45	70
U-1502-2PC	1600	65	32	62
U-1501-2PC	1700	72	36	54
U-2600-2PC	3000	72	45	70
U-3600-2PC	3600	72	48	78
U-4000-2PC	4500	72	48	96
2PC=TWO SECTION CONSTRUCTION				

Height includes 6" adjustable legs.

MGR EQUIPMENT CORP.

22 Gates Avenue, Inwood, New York 11096-1697

Phone: (516) 239-3030
 Fax: (516) 239-3602
 Toll Free: (800) 486-4647