





Your Solutions Partner

Specifications


F.O.B. Sedalia, Missouri 65301

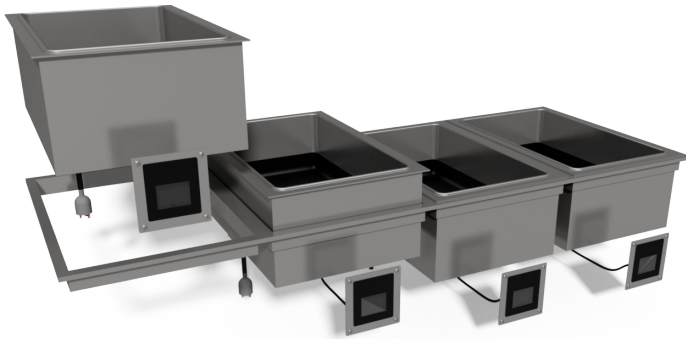

Model - WW-4

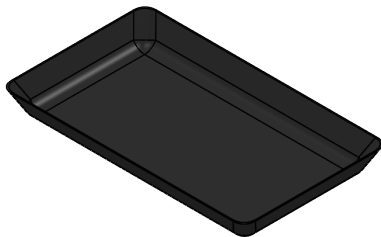

Silicone Well Liner

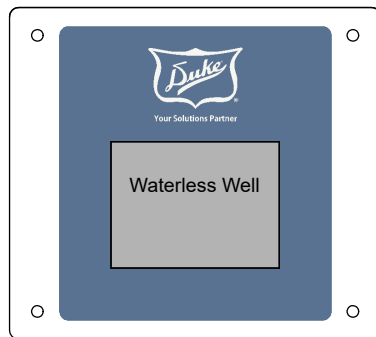

Touch Screen Control

Agency Listings:



UL/ANSI NSF4

DUKE MANUFACTURING CO.

2305 N. Broadway

St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1180 Waterless Hot Food Well

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Waterless Hot Food Well

- | | |
|---------------------------------------|-------------------|
| ☐ WW-1-120 | 1 Well - 120V |
| ☐ WW-1-208/240 | 1 Well - 208V/240 |
| ☐ WW-2-120 | 2 Well - 120V |
| ☐ WW-2-208/240 | 2 Well - 208V/240 |
| ☐ WW-3-120 | 3 Well - 120V |
| ☐ WW-3-208/240 | 3 Well - 208V/240 |
| ☐ WW-4-120 | 4 Well - 120V |
| ☐ WW-4-208/240 | 4 Well - 208V/240 |
| ☐ WW-5-120 | 5 Well - 120V |
| ☐ WW-5-208/240 | 5 Well - 208V/240 |
| ☐ WW-6-120 | 6 Well - 120V |
| ☐ WW-6-208/240 | 6 Well - 208V/240 |


BODY:

- Stainless Steel well
- Fully insulated galvanized outer body
- Drop-In style with 1/2" flange
- Easy lift out from top for easy access and fast service without need to remove food guards.
- Standard with 6' cord and plug
- No drain connection required
- Removable non-stick pan liner to facilitate easy cleaning - Standard with each unit
 - Material: FDA approved silicone rubber
 - Color: Black



CONTROLS:

- Touch Screen Control is easy to use and learn
- Three (3) preset temperatures
- Easily programmable for custom temperatures
- Controls have a built-in Wi-Fi modem and redundant controls capabilities for future activation
- Low voltage controls have "plug and play" screen replacement
- 72" Control wire for easy installation


Specification subject to change






Waterless Hot Food Well

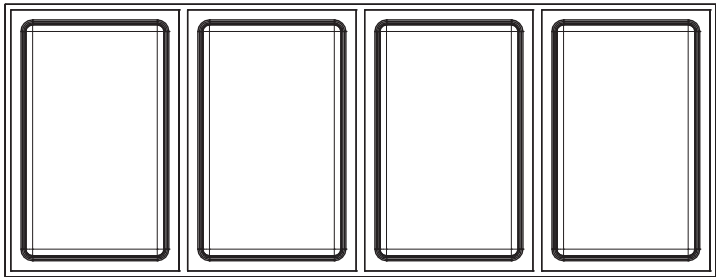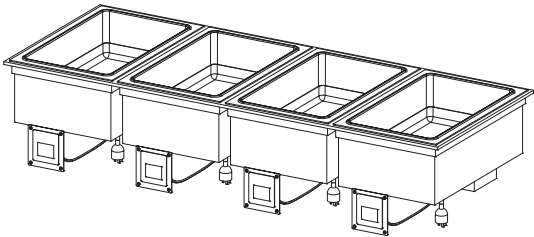

Control Specification



Control Cutout

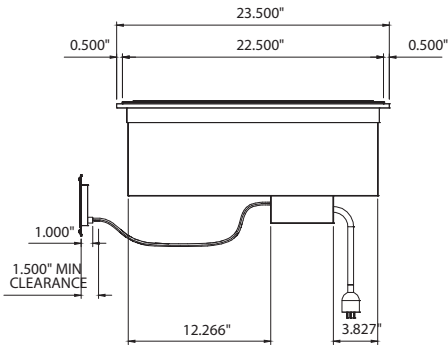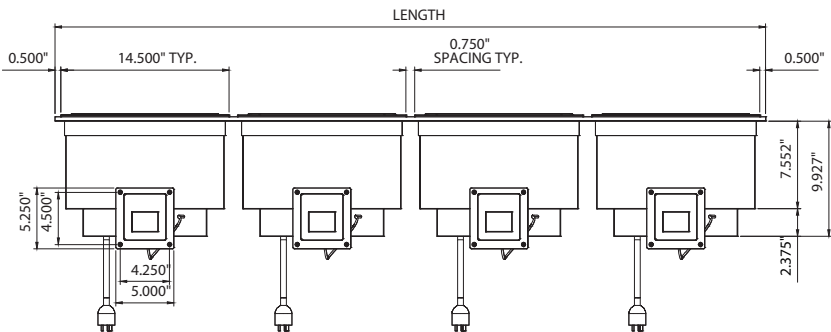

ELECTRICAL SPECIFICATIONS:

DIMENSIONS:

Freight Class: 100

Model	Volts 60Hz	Total Watts**	Total Amps**	NEMA per well*	Height: 10.30in (26.16cm)				Countertop Cutout				Cube Ft. crated	Crated Ship Weight	
					Width		Length		Width		Length			lbs.	kg
					In.	cm	In.	cm	In.	cm	In.	cm			
WW-1-120	120	665	5.5	5-15	22.5	57.15	14.50	36.9	21.75	55.3	13.88	35.0	3.82	25	11.34
WW-1-208/240	208/240	500/665	2.4/2.8	6-20					23.5	59.69	30.75	78.1			
WW-2-120	120	1330	11.1	5-15-x2	23.5	59.69	46.00	116.8					21.75	55.3	44.38
WW-2-208/240	208/240	1000/1330	4.8/5.5	6-20-x2					23.5	59.69	61.25	155.6	21.75	55.3	59.63
WW-3-120	120	1995	16.6	5-15-x3	23.5	59.69	76.50	194.3					21.75	55.3	74.88
WW-3-208/240	208/240	1500/1995	7.2/8.3	6-20-x3					23.5	59.69	91.75	233.1	21.75	55.3	90.13
WW-4-120	120	2660	22.2	5-15-x4	23.5	59.69	91.75	233.1					21.75	55.3	90.13
WW-4-208/240	208/240	2000/2660	9.6/11.1	6-20-x4					23.5	59.69	91.75	233.1	21.75	55.3	90.13
WW-5-120	120	3325	27.7	5-15-x5	23.5	59.69	91.75	233.1					21.75	55.3	90.13
WW-5-208/240	208/240	2500/3325	12.0/13.9	6-20-x5					23.5	59.69	91.75	233.1	21.75	55.3	90.13
WW-6-120	120	3990	33.3	5-15-x6	23.5	59.69	91.75	233.1					21.75	55.3	90.13
WW-6-208/240	208/240	3000/3990	14.4/16.6	6-20-x6					23.5	59.69	91.75	233.1	21.75	55.3	90.13

* = Each well has it's own individual cord and plug. i.e.WW-3-208 will have 3ea. NEMA 6-20P plugs.

** = Watts and Amps shown are total of all wells per model.

HOT HOLDING UNIT - WATERLESS WELL



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com

Printed in U.S.A
© 2024, Duke Manufacturing Co.