



Your Solutions Partner

# Specifications

F.O.B. Sedalia, Missouri 65301



E-3-CBSS (shown with optional maple cutting board)

## OPTIONS:

- ☐ 14 gauge tops
- ☐ 1/2" poly cutting surface added to integral top
- ☐ Backsplash
- ☐ Recessed top (to accommodate griddles, fryers, etc.)
- ☐ Adaptor plates
- ☐ 3-phase wiring
- ☐ 6', 8' or 10' Cord and plug
- ☐ Heated base module
- ☐ Electric outlet in base
- ☐ Sliding Doors
- ☐ Pass-thru construction
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint in 12 colors
- ☐ Casters (add cord and plug), 5" swivel with locks
- ☐ Food shields
- ☐ Tray slides
- ☐ Work shelves
- ☐ Customer side Kickplates - Stainless steel or Painted
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

DUKE MANUFACTURING CO.

2305 N. Broadway  
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax

www.dukemfg.com

SS-1098 Thurmaduke Hot Holding Electric - Standard

## Approval Stamp(s):

### PRODUCT INFORMATION:

PROJECT: \_\_\_\_\_

ITEM: \_\_\_\_\_

QUANTITY: \_\_\_\_\_

MODEL:

### Thurmaduke® Steamtables

#### Hot Food Units - Electric - Standard

- ☐ E-2-CBPG/E-2-CBSS 2 top openings
- ☐ E-3-CBPG/E-3-CBSS 3 top openings
- ☐ E-4-CBPG/E-4-CBSS 4 top openings
- ☐ E-5-CBPG/E-5-CBSS 5 top openings
- ☐ E-6-CBPG/E-6-CBSS 6 top openings

### TOP:

- 16 gauge 300 Series stainless steel
- Top openings die-stamped. 11 7/8" x 19 7/8"

### HEAT COMPARTMENTS:

- 6 1/2" deep Sealed wells with drains
- Wet or Dry operation
- Fully Insulated Wells
- Copper manifolds and brass master valve
- 750 or 1200 watt elements
- 120, 208 or 240 volt A/C
- Master Toggle Switch w/ indicator light for entire unit
- Single Phase standard

### BODY AND INTERIOR SHELF:

- ☐ Stainless Steel body
- ☐ Painted body w/ choice of 12 powder coat colors
  - Stainless Steel Front Panel w/ control knobs
  - Wire knob guards
  - Full bottom shelf to match body
  - 6" polished stainless steel adjustable legs

### Certifications





Specification subject to change




**WARNING** For CA residents: go to  
[www.dukemfg.com/prop65](http://www.dukemfg.com/prop65) for prop 65 warning

# Thurmaduke®

Steamtables Hot Food Units - Electric - Standard

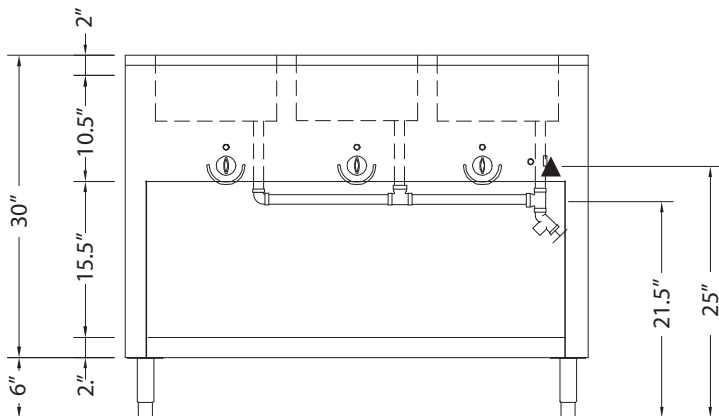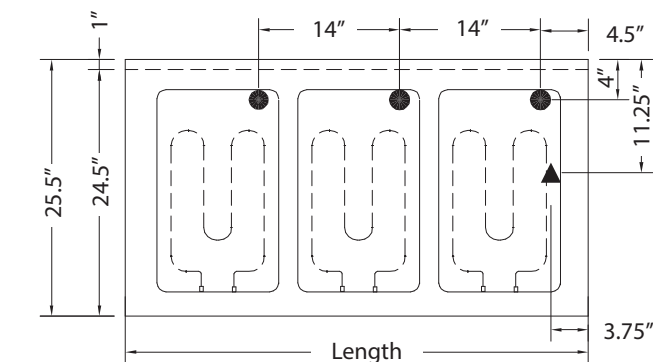

DIMENSIONS:

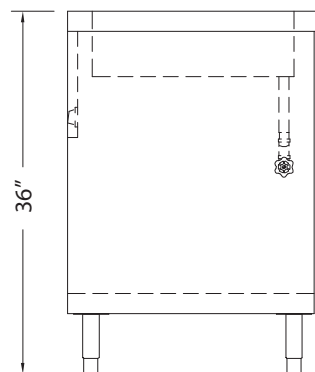

FREIGHT CLASS: 150

| LEGEND |                       |
|--------|-----------------------|
| ▲      | ELECTRICAL CONNECTION |
| ●      | DRAIN LOCATION        |

| Model    |           | Length |       | Depth  |      | Height |      | Top Openings | Cube ft. Crated | Weight |       |
|----------|-----------|--------|-------|--------|------|--------|------|--------------|-----------------|--------|-------|
| Enameled | Stainless | in     | cm    | in     | cm   | in     | cm   |              |                 | lbs    | kg    |
| E-2-CBPG | E-2-CBSS  | 32     | 81.3  | 25-1/2 | 64.8 | 36     | 91.4 | 2            | 28.1            | 210    | 95.5  |
| E-3-CBPG | E-3-CBSS  | 46     | 116.8 | 25-1/2 | 64.8 | 36     | 91.4 | 3            | 39.6            | 264    | 120.0 |
| E-4-CBPG | E-4-CBSS  | 60     | 152.4 | 25-1/2 | 64.8 | 36     | 91.4 | 4            | 51.2            | 344    | 156.4 |
| E-5-CBPG | E-5-CBSS  | 74     | 188.0 | 25-1/2 | 64.8 | 36     | 91.4 | 5            | 62.3            | 433    | 196.8 |
| E-6-CBPG | E-6-CBSS  | 88     | 223.5 | 25-1/2 | 64.8 | 36     | 91.4 | 6            | 74.3            | 527    | 239.6 |

## ELECTRICAL SPECIFICATIONS:

Cord &amp; NEMA plug NOT included

| Model       | 120V 750W  |      |       | 208V 750W  |      |       | 240V 750W  |      |       |
|-------------|------------|------|-------|------------|------|-------|------------|------|-------|
|             | Watt       | Amps | NEMA  | Watt       | Amps | NEMA  | Watt       | Amps | NEMA  |
| E-2-CBPG/SS | 1500       | 12.5 | 5-15  | 1500       | 7.2  | 6-20  | 1500       | 6.3  | 6-20  |
| E-3-CBPG/SS | 2250       | 18.8 | L5-30 | 2250       | 10.8 | 6-20  | 2250       | 9.4  | 6-20  |
| E-4-CBPG/SS | 3000       | 25.0 | 5-50  | 3000       | 14.4 | 6-20  | 3000       | 12.5 | 6-20  |
| E-5-CBPG/SS | 3750       | 31.3 | 5-50  | 3750       | 18.0 | L6-30 | 3750       | 15.6 | L6-30 |
| E-6-CBPG/SS | N/A        |      |       | 4500       | 21.6 | L6-30 | 4500       | 18.8 | L6-30 |
| Model       | 120V 1200W |      |       | 208V 1200W |      |       | 240V 1200W |      |       |
|             | Watt       | Amps | NEMA  | Watt       | Amps | NEMA  | Watt       | Amps | NEMA  |
| E-2-CBPG/SS | 2400       | 20   | L5-30 | 2400       | 11.5 | 6-20  | 2400       | 10   | 6-20  |
| E-3-CBPG/SS | 3600       | 30   | 5-50  | 3600       | 17.3 | L6-30 | 3600       | 15   | 6-20  |
| E-4-CBPG/SS | N/A        |      |       | 4800       | 23.1 | L6-30 | 4800       | 20   | L6-30 |
| E-5-CBPG/SS | N/A        |      |       | 6000       | 28.9 | 6-50  | 6000       | 25   | 6-50  |
| E-6-CBPG/SS | N/A        |      |       | 7200       | 34.6 | 6-50  | 7200       | 30   | 6-50  |



**Duke Manufacturing Co.**  
2305 N. Broadway  
St. Louis, MO 63102

Phone: 314-231-1130  
Toll Free: 1-800-735-3853  
Fax: 314-231-5074

[www.dukemfg.com](http://www.dukemfg.com)

Printed in U.S.A  
© 2025, Duke Manufacturing Co.