



A family company manufacturing in the USA

www.glastender.com



CS1FB60
Stainless steel doors, and top



Intertek Intertek

4004503

Conforms to NSF/ANSI STD 7 and UL STD 471

Certified to CSA STD C22.2 No. 120

Listed as NSF Standard 7

for open food as a storage refrigerator

Standard Features

- Self-contained
- Stainless steel interior
- Locking doors
- LED interior lighting
- Heated mullion to minimize condensation
- Evaporator above compressor compartment to maximize storage capacity
- Three adjustable, coated-wire shelves per door section

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Coolers Shallow Depth, One Zone, Front Serviced, Bar Profile

CS1FB

CS1FB52, CS1FB60, CS1FB72,
CS1FB84

CONFIGURATION HIGHLIGHT



Configurable Options

Temperature:

- Beer/Food - 34°F to 40°F
- White wine - 50°F to 55°F
- Red wine - 60°F to 65°F

Refrigeration Compartment

Location:

- Left or Right

Refrigeration Compartment

Cover Finish:

- Black vinyl-clad
- Unlaminated
- Stainless steel
- Jeweled stainless
- Laminated

Door Style & Finish (specify per door section):

- Black vinyl-clad
- Stainless steel
- Jeweled stainless
- Laminated
- Unlaminated
- Glass, black vinyl-clad
- Glass, stainless steel
- Glass, jeweled stainless
- Glass, laminated

Door Hinge Location (specify for each door):

- Left or Right

Door Handle:

- Signature
- Pull-tab
- Tube

Top Style:

- No finished top
- Stainless top

Left and Right Side Finish:

- Black vinyl-clad
- Stainless steel

Back Finish:

- Galvanized steel
- Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- Blue

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Coolers - Shallow Depth, One Zone, Front Serviced, Bar Profile

Specifications

		CS1FB52	CS1FB60	CS1FB72	CS1FB84
Dimensions	Length	52"	60"	72"	84"
	Number of Sections	2	2	3	3
	Door Opening	16"	20"	16"	20"
Electrical	Electrical Supply	120V, 1 phase, 60 Hz, dedicated 15A circuit required			
	Full Load Amps	3.5	3.5	3.5	3.5
	Plug Type	8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment*			
Refrigeration	Refrigerant	R290 - 125 grams, 4.41 oz., 0.28 pounds			
	Compressor	Reciprocating, 1/6 HP, 1300 BTUH, 0.11 Tons			
	Heat Rejection	1430 BTUH			
Operating Range		34°F (1°C) to 40°F (4°C)			
Plumbing		Automatic condensate evaporator; no drain connection required †			
Weight Bearing Capacity		Countertops and other accessories should not exceed 500 pounds per door			

Materials

- Stainless steel parts include: exterior sub-top, interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- Galvanized steel parts include: back and bottom



† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.

Capacities

	CS1FB52	CS1FB60	CS1FB72	CS1FB84
12 oz. bottles, cases	8.1	10.6	12.8	16.6
750ml wine bottles	77	102	121	162
1/2 barrel kegs	N/A	N/A	N/A	N/A
1/6 barrel kegs	N/A	N/A	N/A	N/A
Capacity values below are per door/drawer section (750ml wine bottles)				
Drawers	N/A	N/A	N/A	N/A
Upright pull-out	N/A	N/A	N/A	N/A
Horizontal pull-out	N/A	N/A	N/A	N/A
Combo pull-out	N/A	N/A	N/A	N/A




5400 N Michigan Rd • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA

Coolers - Shallow Depth, One Zone, Front Serviced, Bar Profile

Drawings

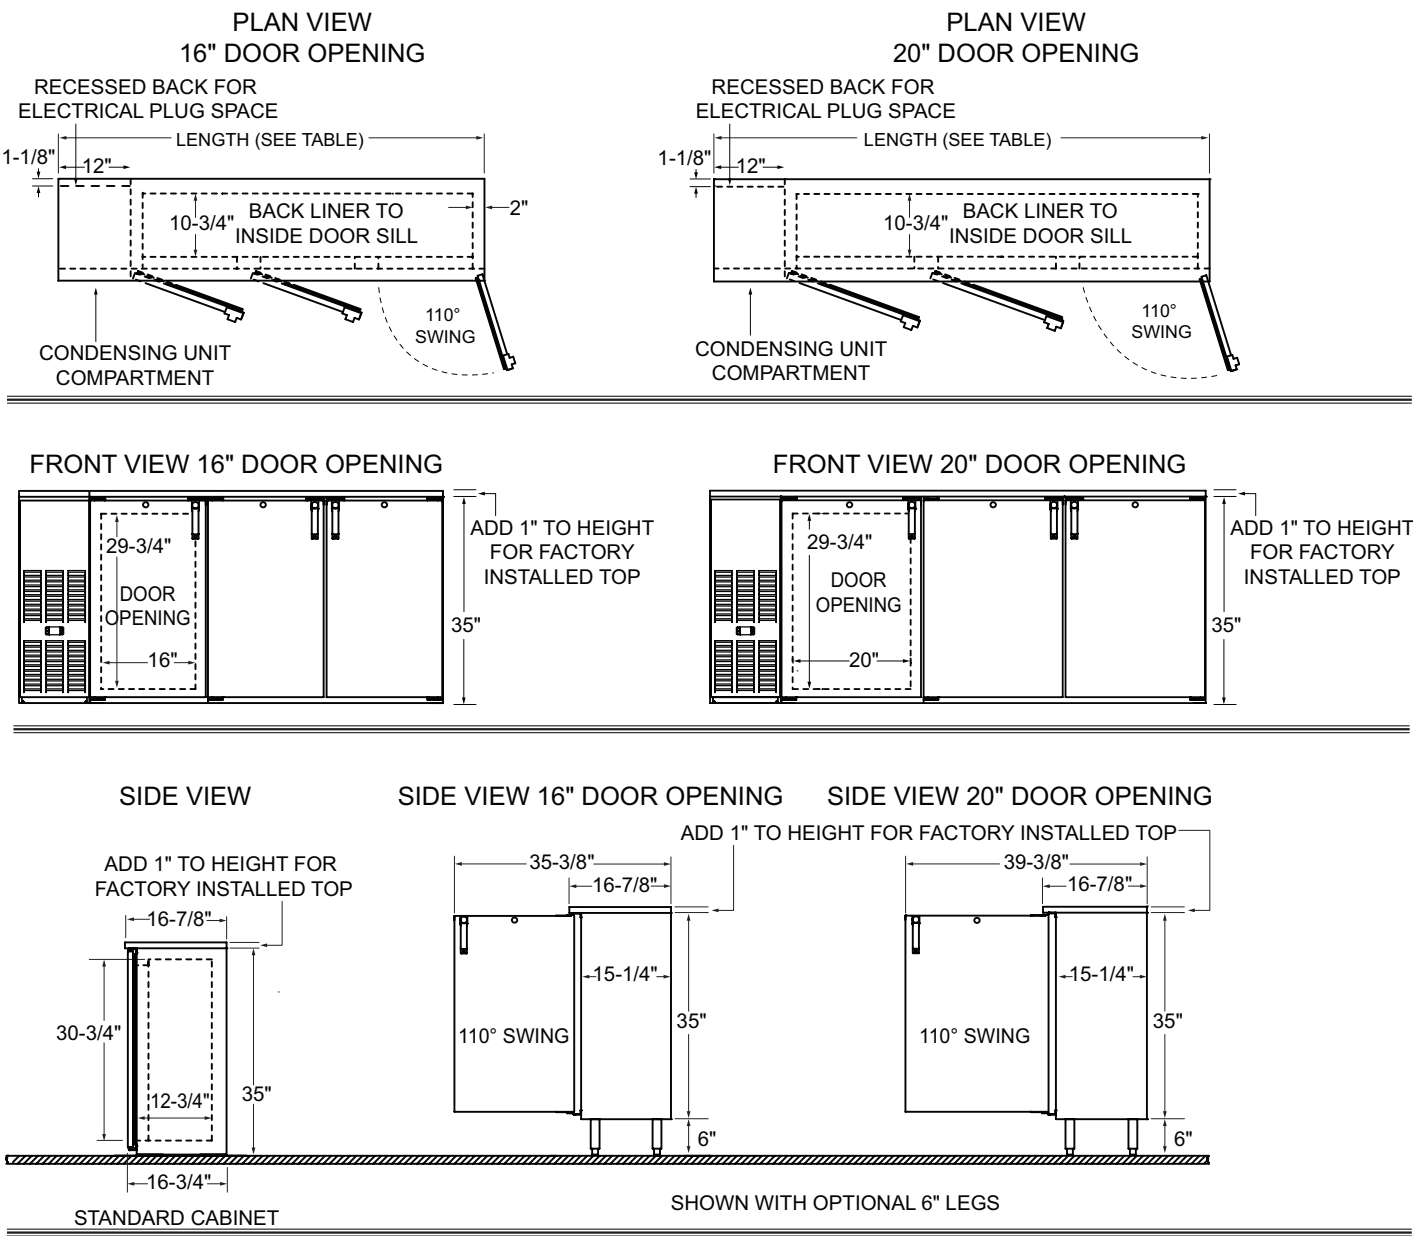

OPTIONAL LEGS AND CASTERS

