



GAS

GRIDDLES | SNAP ACTION COUNTER TOP

IMPERIAL



ISAE-36

Model Numbers

ISAE-24 ISCE-24

ISAE-36 ISCE-36

ISAE-48 ISCE-48

ISAE-60 ISCE-60

ISAE-72 ISCE-72



4" (102) WIDE GREASE GUTTER AND 1 GAL. (3.8 L) GREASE CAN



THICK HIGHLY POLISHED STEEL GRIDDLE PLATE MAINTAINS SELECTED TEMPERATURE.



FULL WIDTH REAR FLUE DISTRIBUTES HEAT UNIFORMLY ACROSS THE GRIDDLE SURFACE.



AERATION BAFFLES BETWEEN BURNERS SPREAD HEAT ACROSS GRIDDLE FOR MORE EVEN HEATING.

SNAP ACTION THERMOSTAT AND BURNERS

- Snap action thermostat control every 12" (305 mm) is ideal for high production kitchens.
- Temperature variance $\pm 7^{\circ}$ F for snap action and $\pm 2^{\circ}$ F for the solid state (ISCE) models.
- Each "U" shaped burner is rated at 24,000 BTU (7 KW) and located every 12" (305 mm).
- Aeration baffles between burners spread the heat evenly across the entire griddle surface.
- Each burner has a standing pilot for instant ignition.

GRIDDLE PLATE

- Highly polished 1" (25 mm) thick steel plate holds temperature and has a quick recovery.
- Full 24" (610 mm) plate depth for more cooking surface.
- High splash guard sides with a 4" (102 mm) rear splash guard for easy clean-ups.
- Surface is ideal for a large range of menu items.
- Optional chrome and grooved griddle top are available as an option.

GREASE MAINTENANCE

- Stainless steel grease gutter is 4" (102 mm) wide.
- Large 1 gal (3.8 L) capacity grease can has a weep hole to indicate when full.
- Grease can removes easily.


EXTERIOR

- Stainless steel front, sides, splash guard, and ledge.
- Stainless steel ledge is one piece rolled for cleaning convenience.
- Range match profile when placed on a refrigerated base or equipment stand.
- Control knobs are cast aluminum with a Valox™ heat protection grip.
- 4" (102 mm) stainless steel legs are included.
- One year parts and labor warranty.



GAS

GRIDDLES | SNAP ACTION COUNTER TOP

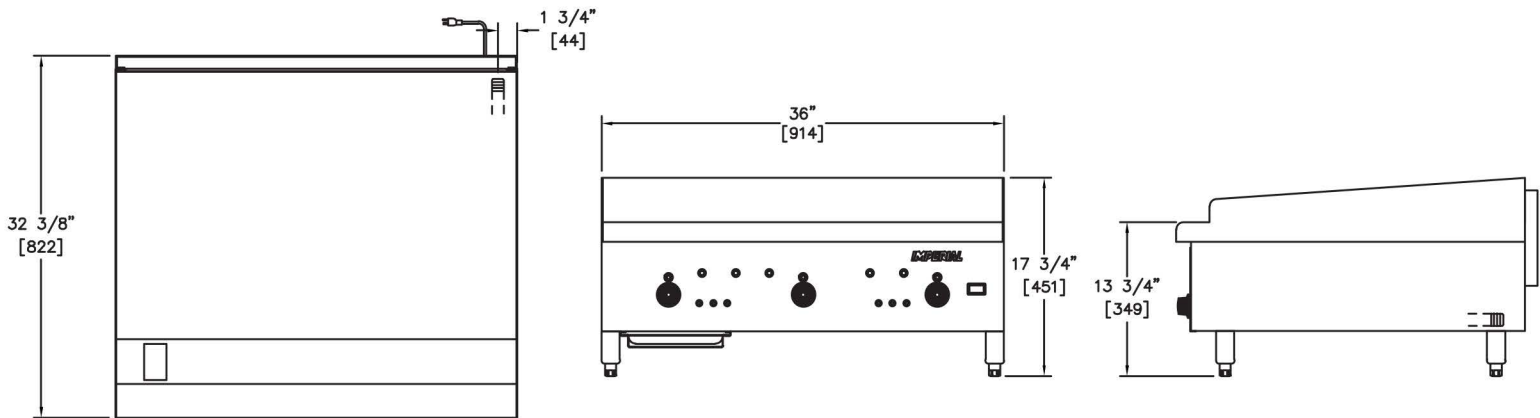

SNAP ACTION GRIDDLES

MODEL	WIDTH IN (MM)	BURNERS	GAS OUTPUT BTU (KW)	SHIP WEIGHT (KG) LBS
ISAE-24	24" (610)	2	48,000 (14)	(140) 310
ISAE-36	36" (914)	3	72,000 (21)	(199) 440
ISAE-48	48" (1219)	4	96,000 (28)	(265) 585
ISAE-60	60" (1524)	5	120,000 (35)	(333) 735
ISAE-72	72" (1829)	6	144,000 (42)	(400) 885

SNAP ACTION GRIDDLES WITH SOLID STATE THERMOSTATS

MODEL	WIDTH IN (MM)	BURNERS	GAS OUTPUT BTU (KW)	SHIP WEIGHT (KG) LBS
ISCE-24	24" (610)	2	48,000 (14)	(140) 310
ISCE-36	36" (914)	3	72,000 (21)	(199) 440
ISCE-48	48" (1219)	4	96,000 (28)	(265) 585
ISCE-60	60" (1524)	5	120,000 (35)	(333) 735
ISCE-72	72" (1829)	6	144,000 (42)	(400) 885

MODEL	GRIDDLE PLATE DIMENSIONS	DIMENSIONS	CRATED DIMENSIONS
ISAE-24 ISCE-24	24" W X 24" D (610 X 610 MM)	24" W X 32-3/8" D X 18" H (610 X 822 X 356 MM)	26-1/2" W X 36" D X 16-1/2" H (673 X 914 X 419 MM)
ISAE-36 ISCE-36	36" W X 24" D (914 X 610 MM)	36" W X 32-3/8" D X 14" H (914 X 822 X 356 MM)	38-1/2" W X 36" D X 16-1/2" H (978 X 914 X 419 MM)
ISAE-48 ISCE-48	48" W X 24" D (1219 X 610 MM)	48" W X 32-3/8" D X 18" H (1219 X 822 X 356 MM)	50-1/2" W X 36" D X 16-1/2" H (1283 X 914 X 419 MM)
ISAE-60 ISCE-60	60" W X 24" D (1524 X 610 MM)	60" W X 32-3/8" D X 18" H (1524 X 822 X 356 MM)	62-1/2" W X 36" D X 16-1/2" H (1588 X 914 X 419 MM)
ISAE-72 ISCE-72	72" W X 24" D (1829 X 610 MM)	72" W X 32-3/8" D X 18" H (1829 X 822 X 356 MM)	74-1/2" W X 36" D X 16-1/2" H (1893 X 914 X 419 MM)

OPTIONS AND ACCESSORIES

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 7" (178 mm) deep, stainless steel front landing ledge
- 9" (229 mm) deep, stainless steel front landing ledge
- Chrome griddle top, (add "-CG" to model number)
- Grooved griddle top, (add "-GG" to model number)
- Extra grease can

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)

ELECTRICAL REQUIREMENT			
VOLTS	PHASE	HERTZ	AMPS MAX.
120V	1	60	2 AMPS

