

UNDERCOUNTER HIGH-TEMP DISHWASHER

Blakeslee's undercounter dishwasher is ideal for bars, pubs, restaurants and hotels. A beautifully redesigned machine at a reasonable price.

FEATURES

- 30 rack per hour / 2 minute cycle
- 20 rack per hour / 3 minute cycle
- Built-in 6.5 Kw booster
- 2.7 Kw wash tank heater
- 180-degree sanitizing rinse every cycle
- Built-in detergent and rinse aid dispensers with hook-up provided
- Removable wash and rinse arms (upper and lower)
- Triple filtering system to capture soil and debris
- Built-in 6530 watt booster heater for 180 degree final rinse water
- Perfecta-Rinse™ : Extends the wash cycle time to ensure 180 degree final rinse

CONTROLS / DISPLAY

- Top mounted controls
- Easy to read and simple to operate

CONSTRUCTION & FINISH

- Double skin stainless steel door with security micro-switch
- Double skin stainless steel interior with deep formed rack supports
- Internal cavity and exterior panels – 304 stainless steel

NOISE

- 59.3 dB(A)

DRAIN PUMP

- Built in drain pump provides versatility for installation locations
- 43W hMAX 31 1/2" (10, 56 gal(US)/min**) ** Maximum Flow Rate

PUMP POWER

- 0.75 HP/ 560W (89.8 gal (US) / min***) *** Maximum Flow Rate



RACK SIZES:

Dish Rack	20in x 20in	508mm x 508mm
Dish Max Height	12.25 in	311mm
Plates Diameter	12.75in	324mm

WATER CONSUMPTION

Per Rack	0.60 – 0.74 (gal)	2.27 – 2.8 (L)
----------	-------------------	----------------

OPERATING CYCLE:

Cycle 1	120 sec
Cycle 2	180 sec

OPERATING CAPACITY

Racks per hour	30/20	
Wash Tank Capacity	7.1 (gal)	26.88 (L)
Booster Capacity	1.5 (gal)	5.68 (L)

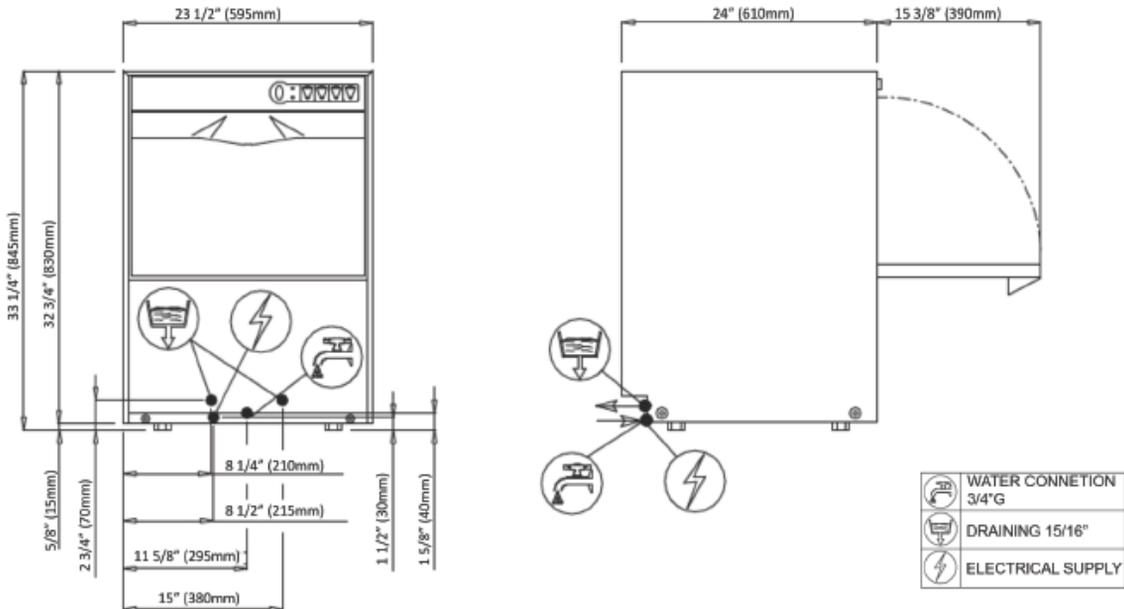
CYCLE TEMPERATURES

Wash	160°F	71.1°C
Rinse	185°F	85°C

WATER REQUIREMENTS

Inlet Temperature	140°F	60°C
Inlet Water Pressure	25-60psi	1.8 – 4.2kg/cm ²
Flow Pressure	15-25psi	1.0 – 1.8kg/cm ²

All specifications are dependent on water pressure and temperature

UNDERCOUNTER HIGH-TEMP DISHWASHER

APPROXIMATE SHIPPING SPECIFICATIONS

Dimensions 34in x 30in x 44in 836mm x 762mm x 1118mm
 Weight 190lbs 86.18kg

ELECTRIC

UC-18-1 Voltage/Hertz/Phase 220-240/60/1 Total Amps 29.5 – 32.2
 UC-18-3 Voltage/Hertz/Phase 220-240/60/3 Total Amps 17.1 – 18.6

*Other voltages available - contact factory