
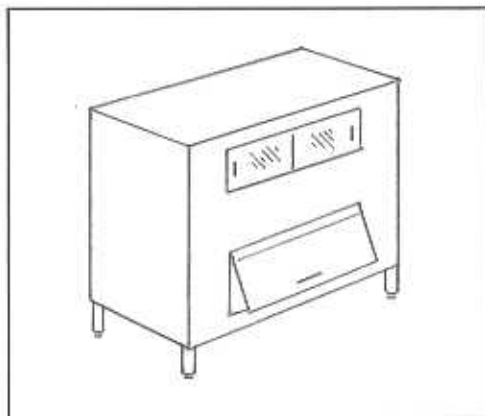


UPRIGHT SERIES SINGLE BUMPER DOOR

- ♦ EASY ACCESS TO ICE WITH SCOOP OR SHOVEL.
- ♦ ONE AND TWO SECTION MODELS AVAILABLE.
- ♦ STAINLESS STEEL TOPS AND DOORS.
- ♦ REFRIGERATOR DOOR AVAILABLE.
- ♦ BIN DIVIDERS AVAILABLE.
- ♦ CUSTOM SIZES AVAILABLE; CALL FOR SPECIFICATION ASSISTANCE.

GENERAL SPECIFICATIONS

INTERIOR.....	STAINLESS STEEL, TYPE 304, FULLY WELDED SEAMS.
EXTERIOR.....	POLISHED STAINLESS STEEL or STUCCO ALUMINUM. GALVANIZED STEEL BACK and BOTTOM (STAINLESS STEEL OPTIONAL).
INSULATION.....	2" EXPANDED POLYSTYRENE.
DRAIN.....	1" MPT, CENTER BOTTOM.
LEGS.....	6" ADJUSTABLE with STAINLESS STEEL FEET.
ACCESS DOOR.....	ACRYLIC, 8 1/2" x 29" OPENING.
BUMPER DOOR.....	STAINLESS STEEL, 14 1/2" X 29" OPENING. REMOVABLE TO GET THROUGH DOORWAYS.

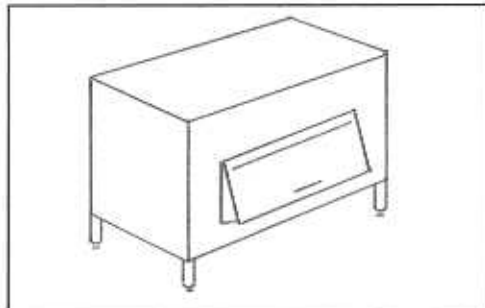

Height includes 6" adjustable legs.
Bumper door adds an additional 9" to depth.

MODEL NUMBER	APPROX STORAGE (lbs.)	WIDTH (in.)	DEPTH (in.)	HEIGHT (in.)
SP-50	500	30 1/4	31	43
SP-70	700	30 1/4	31	58
SP-1030	1000	30 1/4	31	78
SP-1037	1000	37 1/4	30	66
SPL-500	500	42 1/4	30	36
SP-1042	1000	42 1/4	31	66
SP-85	850	44 1/4	31	52
SP-1144	1125	44 1/4	31	68
SP-1010	1000	48 1/4	31	52
SP-1200	1200	48 1/4	31	61
SP-1300	1300	48 1/4	31	66
SP-95	950	54 1/4	29	50
SP-1100	1100	56 1/4	31	52
SP-1350	1350	56 1/4	31	59
SPL-800	800	60 1/4	32	40
SPL-960	960	60 1/4	36	39
SP-1325	325	60 1/4	32	52
SP-1475	1455	60 1/4	31	60
SP-1650	1625	60 1/4	31	66
SP-1166	1100	66 1/4	31	48
SP-1550	1550	66 1/4	31	59
SP-1200-2PC	1200	48 1/4	31	61
SP-1600-2PC	1600	48 1/4	40	66
SP-1350-2PC	1350	56 1/4	31	59
SP-1260-2PC	1200	60 1/4	31	54
SP-1475-2PC	1475	60 1/4	31	60
SP-2000-2PC	2200	60 1/4	40	70
2PC=TWO SECTION CONSTRUCTION				

MGR EQUIPMENT CORP.

22 Gates Avenue, Inwood, New York 11096-1697

Phone: (516) 239-3030
Fax: (516) 239-3602
Toll Free: (800) 486-4647