



Photo shown with front and side finish by others. Standard cases are unfinished front with stainless steel sides.

Visit our website for optional RAL colors and Materials finishes.

RAL colors - <https://www.ral-farben.de/en/all-ral-colours>

Materials - <https://www.oscartek.com/downloads/os-cartek-materials-brochure.pdf>

# ROSA PRO RED MEAT SHOWCASE

**MODELS:** ROSA PRO RM900, RM1000, RM1300, RM1500, RM1700, RM2000, RM2100, RM2600, RM3000, RMA90SQ, RMA90C

## STANDARD FEATURES

- Extra clear glass: front and top glasses with front air baffle
- Heated glass sides
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- All tempered glass
- Cases ship standard unfinished front and stainless steel sides

## OPTIONS

- Available in 53 1/8"H with non-refrigerated shelf
- Lift up top glass
- Lift up mechanism for display plate and evaporator (linear models only)
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- Stainless steel step shelf
- Remote condensing unit
- RAL color finish/wood laminate front and side panels
- Epoxy RAL color interior over stainless steel
- Unfinished panels to accept custom millwork by others
- Heated pan for evaporator
- Casters

*\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com


## ROSA PRO RED MEAT

**MODELS:** ROSA PRO RM900, RM1000, RM1300, RM1500, RM1700, RM2000, RM2100, RM2600, RM3000, RMA90SQ, RMA90C

### STANDARD: ROSA PRO RED MEAT


#### PLAN VIEWS

#### ALL ROSA PRO RED MEAT LINEAR MODELS

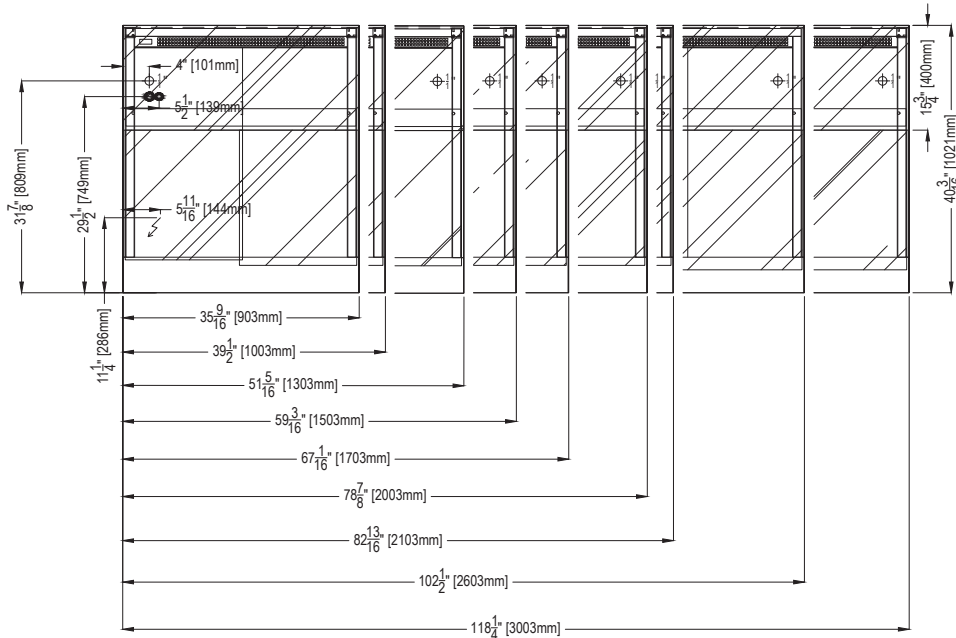


| ELECTRICAL LEGEND                                                                     |                     |
|---------------------------------------------------------------------------------------|---------------------|
|  | REFRIGERATION LINES |
|  | DRAIN               |
|  | POWER               |

#### ROSA PRO RMA90SQ

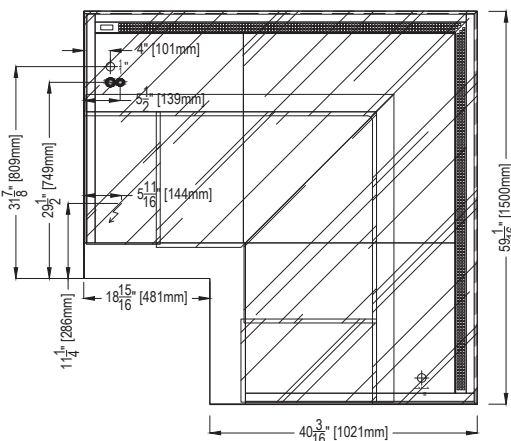

#### ROSA PRO RMA90C

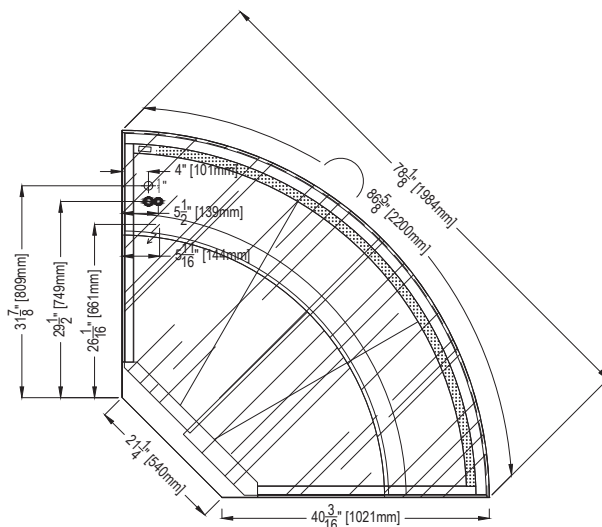

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com





Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_


Discover the Art of Display...

## ROSA PRO RED MEAT


**MODELS:** ROSA PRO RM900, RM1000, RM1300, RM1500, RM1700, RM2000, RM2100, RM2600, RM3000, RMA90SQ, RMA90C

### **STANDARD: ROSA PRO RED MEAT** **REAR ELEVATIONS(OPERATOR SIDE)**


#### ALL ROSA PRO RED MEAT LINEAR MODELS

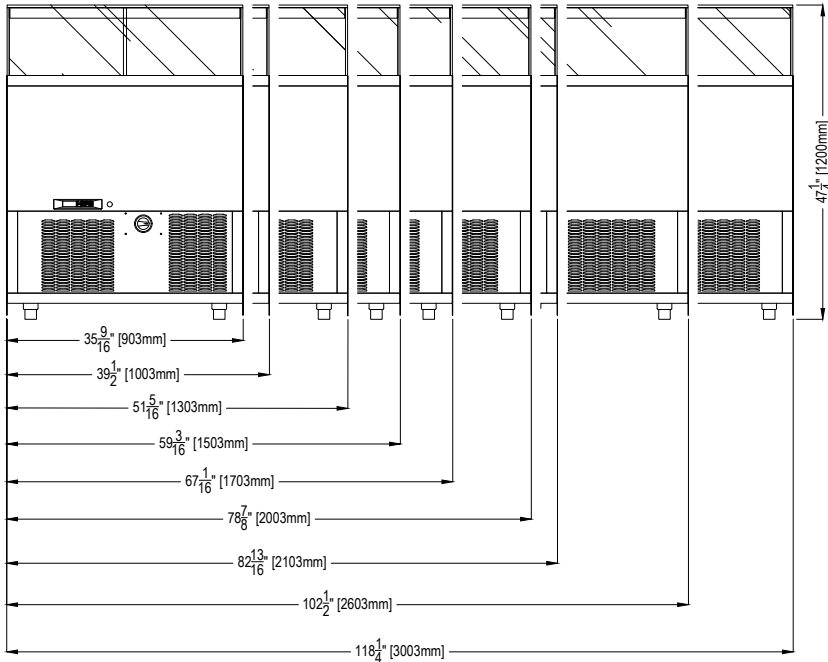

#### ROSA PRO RMA90SQ

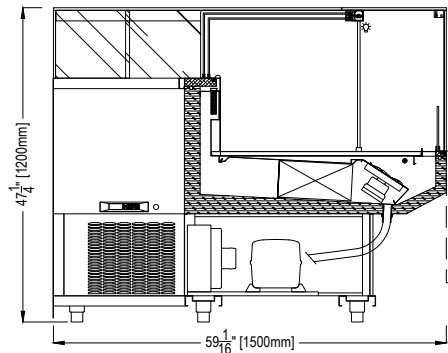

#### ROSA PRO RMA90C

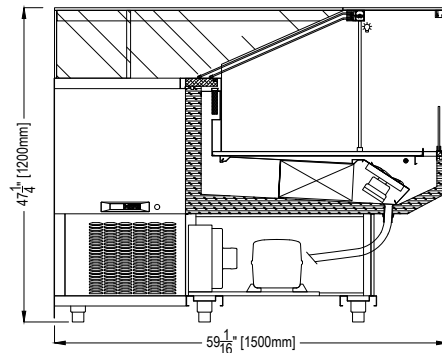

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com








Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## STANDARD: ROSA PRO RED MEAT SECTION VIEWS

**ALL ROSA PRO RED MEAT MODELS + RMA90SQ  
(EXCEPT FOR ROSA RM3000)**

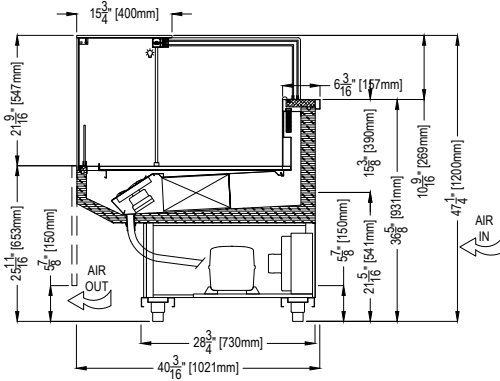


## ROSA PRO RM3000

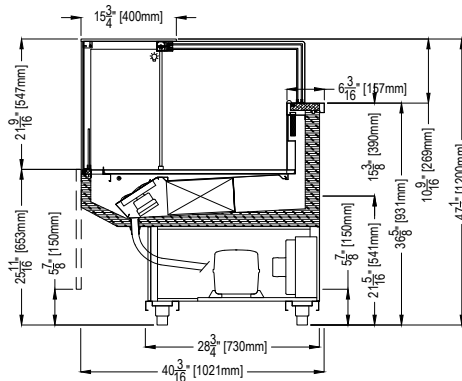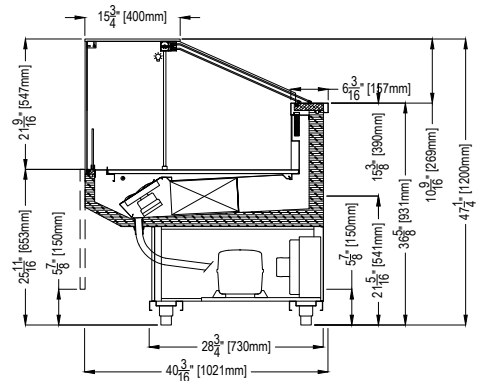**ROSA PRO RMA90C**

### OPTIONAL: ROSA PRO RED MEAT

#### SECTION VIEWS

**ROSA PRO RED MEAT AVAILABLE IN 53 1/8"H WITH  
NON-REFRIGERATED SHELF**

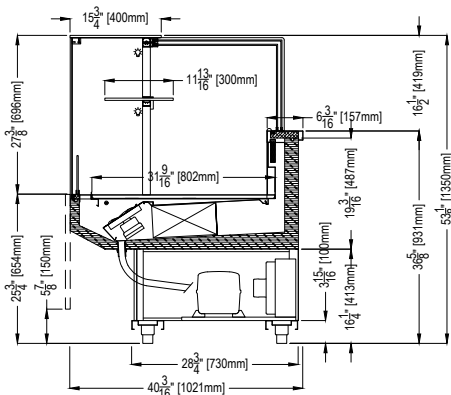

*\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

**OSCARTEK**  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com





Discover the Art of Display...

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## ROSA PRO RED MEAT

**MODELS:** ROSA PRO RM900, RM1000, RM1300, RM1500, RM1700, RM2000, RM2100, RM2600, RM3000, RMA90SQ, RMA90C

| ROSA PRO RED MEAT                 |                 |                                |                                   |                                |                                   |                                |
|-----------------------------------|-----------------|--------------------------------|-----------------------------------|--------------------------------|-----------------------------------|--------------------------------|
| TECHNICAL FEATURES                |                 | MODELS                         |                                   |                                |                                   |                                |
|                                   |                 | ROSA PRO RM900                 | ROSA PRO RM1000<br>(ROSAPMR43912) | ROSA PRO RM1300                | ROSA PRO RM1500<br>(ROSAPMR45912) | ROSA PRO RM1700                |
| External Dimensions (L-D-H)       | Inches          | *35 9/16" - 40 3/16" - 47 1/4" | *39 1/2" - 40 3/16" - 47 1/4"     | *51 5/16" - 40 3/16" - 47 1/4" | *59 3/16" - 40 3/16" - 47 1/4"    | *67 1/16" - 40 3/16" - 47 1/4" |
| Inches-MM                         | MM              | *903 - 1021 - 1200             | *1003 - 1021 - 1200               | *1303 - 1021 - 1200            | *1503 - 1021 - 1200               | *1703 - 1021 - 1200            |
| External Dimensions (L-D-H)       | Inches          | 54" - 50" - 70"                | 54" - 50" - 70"                   | 70" - 50" - 70"                | 70" - 50" - 70"                   | 70" - 50" - 70"                |
| Inches-MM                         | MM              | 1380-1260-1780                 | 1380-1260-1780                    | 1780-1260-1780                 | 1780-1260-1780                    | 1780-1260-1780                 |
| Refrigeration                     | Type            | Fan Ventilated                 | Fan Ventilated                    | Fan Ventilated                 | Fan Ventilated                    | Fan Ventilated                 |
| Refrigeration Display Area        | Type            | Deck                           | Deck                              | Deck                           | Deck                              | Deck                           |
| Operating Temperature             | *F              | 38°F to 41°F                   | 38°F to 41°F                      | 38°F to 41°F                   | 38°F to 41°F                      | 38°F to 41°F                   |
| Compressor                        | Nr./Type        | 1 / Hermetic                   | 1 / Hermetic                      | 1 / Hermetic                   | 1 / Hermetic                      | 1 / Hermetic                   |
| BTU'S @ +14°F Evap<br>Temperature | BTU's           | 2200                           | 2400                              | 3100                           | 3400                              | 3900                           |
| Electric Supply                   | (V/Ph/Hz)       | 115/1/60                       | 115/1/60                          | 115/1/60                       | 115/1/60                          | 115/1/60                       |
| Power Consumption                 | (W/A)           | 700/7.0                        | 750/7.1                           | 800/8.0                        | 1150/10.9                         | 1200/11.0                      |
| Defrost                           | Mode/Type       | Automatic                      | Automatic                         | Automatic                      | Automatic                         | Automatic                      |
| Climatic Class                    | *F/H.R.         | 75°F-55%RH                     | 75°F-55%RH                        | 75°F-55%RH                     | 75°F-55%RH                        | 75°F-55%RH                     |
| Refrigerant Gas                   | Type            | R404A / R452A                  | R404A / R452A                     | R404A / R452A                  | R404A / R452A                     | R404A / R452A                  |
| Pipe Size (Inches)                | Suction, Liquid | 1/2" Suction, 1/4" Liquid      | 1/2" Suction, 1/4" Liquid         | 5/8" Suction, 5/16" Liquid     | 5/8" Suction, 5/16" Liquid        | 5/8" Suction, 5/16" Liquid     |
| Net Weights                       | Lb              | 230                            | 250                               | 280                            | 300                               | 340                            |
| Crated Weights                    | Lb              | 660                            | 660                               | 748                            | 770                               | 792                            |

\*DIMENSIONS ARE WITH POLISHED S/S SIDES

| ROSA PRO RED MEAT                 |                 |                                   |                                 |                                   |                                   |
|-----------------------------------|-----------------|-----------------------------------|---------------------------------|-----------------------------------|-----------------------------------|
| TECHNICAL FEATURES                |                 | MODELS                            |                                 |                                   |                                   |
|                                   |                 | ROSA PRO RM2000<br>(ROSAPMR47912) | ROSA PRO RM2100                 | ROSA PRO RM2600<br>(ROSAPMR41012) | ROSA PRO RM3000<br>(ROSAPMR41112) |
| External Dimensions (L-D-H)       | Inches          | *78 7/8" - 40 3/16" - 47 1/4"     | *82 13/16" - 40 3/16" - 47 1/4" | *102 1/2" - 40 3/16" - 47 1/4"    | *118 1/4" - 40 3/16" - 47 1/4"    |
| Inches-MM                         | MM              | *2003 - 1021 - 1200               | *2103 - 1021 - 1200             | *2603 - 1021 - 1200               | *3003 - 1021 - 1200               |
| External Dimensions (L-D-H)       | Inches          | 88" - 50" - 70"                   | 88" - 50" - 70"                 | 109" - 47" - 65 1/4"              | 125" - 47" - 55 1/4"              |
| Inches-MM                         | MM              | 2230-1260-1780                    | 2230-1260-1780                  | 2768 - 1193 - 1400                | 3175 - 1193 - 1400                |
| Refrigeration                     | Type            | Fan Ventilated                    | Fan Ventilated                  | Fan Ventilated                    | Fan Ventilated                    |
| Refrigeration Display Area        | Type            | Deck                              | Deck                            | Deck                              | Deck                              |
| Operating Temperature             | *F              | 38°F to 41°F                      | 38°F to 41°F                    | 38°F to 41°F                      | 38°F to 41°F                      |
| Compressor                        | Nr./Type        | 1 / Hermetic                      | 1 / Hermetic                    | 1 / Hermetic                      | 1 / Hermetic                      |
| BTU'S @ +14°F Evap<br>Temperature | BTU's           | 4500                              | 5200                            | 5600                              | 6200                              |
| Electric Supply                   | (V/Ph/Hz)       | 115/1/60                          | 115/1/60                        | 115/1/60                          | 115/1/60                          |
| Power Consumption                 | (W/A)           | 1350/12.9                         | 1450/13.3                       | 1750/14.5                         | 1900/15.8                         |
| Defrost                           | Mode/Type       | Automatic                         | Automatic                       | Automatic                         | Automatic                         |
| Climatic Class                    | *F/H.R.         | 75°F-55%RH                        | 75°F-55%RH                      | 75°F-55%RH                        | 75°F-55%RH                        |
| Refrigerant Gas                   | Type            | R404A / R452A                     | R404A / R452A                   | R404A / R452A                     | R404A / R452A                     |
| Pipe Size (Inches)                | Suction, Liquid | 5/8" Suction, 5/16" Liquid        | 5/8" Suction, 5/16" Liquid      | 5/8" Suction, 5/16" Liquid        | 5/8" Suction, 5/16" Liquid        |
| Net Weights                       | Lb              | 380                               | 400                             | 480                               | 500                               |
| Crated Weights                    | Lb              | 1065                              | 1087                            | 1110                              | 1132                              |

\*DIMENSIONS ARE WITH POLISHED S/S SIDES

| ROSA PRO RED MEAT          |                 |                                      |                            |
|----------------------------|-----------------|--------------------------------------|----------------------------|
| TECHNICAL FEATURES         |                 | MODELS                               |                            |
|                            |                 | ROSA PRO RMA90SQ<br>(ROSAPMR4AP9012) | ROSA PRO RMA90C            |
| Inches-MM                  | MM              | *1503 - 1021 - 1200                  | *1984 - 1021 - 1200        |
| Inches-MM                  | MM              | 1780 - 1780 - 1780                   | 1780 - 1780 - 1780         |
| Refrigeration              | Type            | Fan Ventilated                       | Fan Ventilated             |
| Refrigeration Display Area | Type            | Deck                                 | Deck                       |
| Operating Temperature      | *F              | 38°F to 41°F                         | 38°F to 41°F               |
| Compressor                 | Nr./Type        | 1 / Hermetic                         | 1 / Hermetic               |
| Temperature                | BTU's           | 5600                                 | 5800                       |
| Electric Supply            | (V/Ph/Hz)       | 115/1/60                             | 115/1/60                   |
| Power Consumption          | (W/A)           | 1750/14.5                            | 1750/14.5                  |
| Defrost                    | Mode/Type       | Automatic                            | Automatic                  |
| Climatic Class             | *F/H.R.         | 75°F-55%RH                           | 75°F-55%RH                 |
| Refrigerant Gas            | Type            | R404A / R452A                        | R404A / R452A              |
| Pipe Size (Inches)         | Suction, Liquid | 5/8" Suction, 5/16" Liquid           | 5/8" Suction, 5/16" Liquid |
| Net Weights                | Lb              | 440                                  | 440                        |
| Crated Weights             | Lb              | 990                                  | 990                        |

\*DIMENSIONS ARE WITH POLISHED S/S SIDES

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

