

STRATUS III AIR SCREEN

PROJECT: _____
ITEM: _____ QUANTITY: _____

MODEL # SCRFC-SSIII

SPECIFICATIONS

The Stratus III Air Screen SCRFC-SSIII Series is designed as a self-select grab and go refrigerator in the front with rear drop-in hot food wells on the operator service side. Vertical glass protector guard with stainless steel posts are mounted to a stainless steel workboard surface, along with a removable zip lite cutting board. Available with a choice of standard grade plastic laminate exterior ends.



Available lengths: ☐ 48" ☐ 72"

Available depths: ☐ 48"

Available heights: ☐ 54 5/8"



STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Black Louvered Air Grill
- Standard Grade Laminate Exterior with T-Mold Edge Protection
- Stainless Steel #4 Finish Vertical Posts with Clipped Tempered Glass
- Stainless Steel Top with Removable Zip Lite Cutting Board
- Rear Drop-In Hot Food Wells (Hot Section)
 - Dry Application (Slim Line)
 - Individual Heat Controls
 - Infinite Switch
 - No Drain Required
 - Separate Electric Required
- Brushed Aluminum Interior Ends
- Stainless Steel Perforated Interior Back Panel
- LED Top Canopy Light
- (1) Tempered Glass Shelf with LED Light
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471, UL 197, NSF 7 & NSF4 Standards.
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Floor Drain Required
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Stainless Steel Exterior Finish with Standard T-Molding
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Casters (Increases Height by 4")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Rear Drop-In Hot Food Wells (Hot Section)
 - ☐ Wet Application (Slim Line)
 - ☐ Consult Factory for More Information
- ☐ Corian® Top Stock Color
- ☐ Corian® Top Non-Stock Color
- ☐ Zodiac® Top Stock Color
- ☐ Zodiac® Top Non-Stock Color
- ☐ Top Horizontal Stainless Steel Shelf on Protector Guard
- ☐ Top Horizontal Corian® Shelf and Protector Guard
- ☐ Finished Back with Black Air Grill
- ☐ Stainless Steel Rear Air Grill

Air Screen Section

- ☐ Remote Refrigeration
- ☐ Black Styrene Step Sham
- ☐ Stainless Steel Step Sham
- ☐ Stainless Steel Shelf
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)
- ☐ Removable Locking Night Security Panels
- ☐ Pull Down #23 Econo Frost Night Curtain
- ☐ Thermometer



CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055


RPI INDUSTRIES, INC. v1.13

STRATUS III AIR SCREEN

PROJECT: _____


TOLL FREE: 800-525-3692

MODEL # SCRFC-SSIII

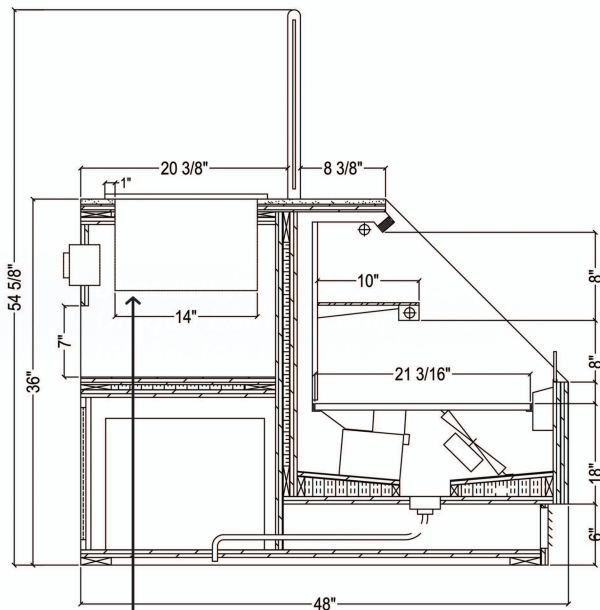

DRY HEAT FOOD WELLS SHOWN

OPTIONAL WET HEAT FOOD WELLS AVAILABLE
CONSULT FACTORY FOR MORE INFORMATION

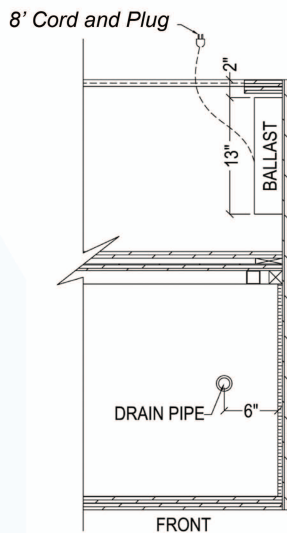

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
Hot Drop-In					208	8.2	6-15P		
SCRFC48R-SSIII	48	48	54 5/8	1/2	115	11.3	5-20P	1850	134A
Hot Drop-In					208	12.3	6-20P		
SCRFC72R-SSIII	72	48	54 5/8	3/4	115/208-230	8.7	L14-20P	2750	134A

AMBIENT

MODEL	L	D	H	VOLT	AMP	PLUG	WT
Hot Drop-In				208	8.2	6-15P	
SCRFC48D-SSIII	48	48	54 5/8	115	.21	5-15P	1730
Hot Drop-In				208	12.3	6-20P	
SCRFC72D-SSIII	72	48	54 5/8	115	.31	5-15P	2630

REMOTE - REFRIGERATED

MODEL	BTU @ 20°F	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC48R-SSIII-RR	4140	115	1.13	5-15P	1730	Verify
SCRFC72R-SSIII-RR	6590	115	1.65	5-15P	2630	Verify

GLYCOL

MODEL	BTU @ 20°F	VOLT	AMP	PLUG	WT	GPM	REFRIG.
SCRFC48R-SSIII-RR-GL	4140	115	1.13	5-15P	1730	1.0	GLYCOL
SCRFC72R-SSIII-RR-GL	6590	115	1.65	5-15P	2630	2.0	GLYCOL

* GLYCOL FOR FRONT AIR SCREEN SECTION ONLY



Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120

Conforms to UL Standard 197,
and NSF Standard 4; Certified
To CSA Standard C22.2 No.109



Electrical & Plumbing locations

1. All Self-Contained, Remote and Glycol Units must be run to a floor drain at time of installation.
2. The SCRFC-SSIII merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v1.13