

VIENNA SELECT COLD

PROJECT: _____
ITEM: _____ **QUANTITY:** _____

MODEL # VSCD-INS

SPECIFICATIONS

The Vienna Series VSCD is a slide-in cold display in our Vienna Select Series. Designed to slide into a counter with front stainless steel panel exposed. This merchandiser includes a glass top that tilts up using gas-springs for support and tilt-out front glass for easy cleaning. It also features stainless steel exterior, top canopy light, (1) refrigerated glass shelf and sliding rear doors.



Available lengths: ☐ 35 7/8" ☐ 51 3/4" ☐ 67 3/4"

Available depths: ☐ 40 1/8"

Available heights: ☐ 44 7/8"

STANDARD FEATURES

- 304 Stainless Steel Exterior
- Tempered Tilt-Up Top Glass
- Insulated Tilt-Out Front Glass
- Insulated Glass Side Panels
- Acrylic Glass Rear Sliding Doors
- Rear Cutting Board
- Top Canopy Light
- (1) Fixed Refrigerated Shelf with Light
- Energy Efficient LED Lighting
- Easy Removable Deck Pans for Cleaning
- Programmable Digital Refrigeration Controller
- Self-Contained Refrigeration with
- Slide-In base
- Adjustable Fan Speed
- Rear Air Ventilation Kit
- Lift-Up Evaporator
- Easy Slide-Out Condensing Unit
- ETL Listed in Accordance with UL 471 and NSF 7 Standards
- Environmentally Safe Refrigerant
- 5 Year Compressor Warranty
- Floor Drain Required

OPTIONAL FEATURES

- ☐ Remote Refrigeration
- ☐ Integrations Modular Counter (Consult Factory)
- ☐ Adjustable Legs & Casters (Slide-In Style Units)
 - ☐ 6" Legs ☐ 8" Legs ☐ 6" Casters



Conforms to UL Standard 471, and NSF Standard 7; Certified To CSA Standard C22.2 No.120

NOTE:

THE VSCD IS DESIGNED FOR NSF TYPE I ROOM CONDITIONS OF 75°F/55%RH. ANY DEVIATION IN TEMPERATURE OR HUMIDITY MAY INCREASE CHANCE OF CONDENSATION

MODEL	L	D*	H	COMP HP	VOLT	AMP	PLUG	WT	REFRIG.
VSCD2-20-R-SQ-SC-INS	35 7/8	40 1/8	44 7/8	3/8	115	7.25	5-15P	484	134A
VSCD3-20-R-SQ-SC-INS	51 3/4	40 1/8	44 7/8	1/2	115	8.62	5-15P	550	134A
VSCD4-20-R-SQ-SC-INS	67 3/4	40 1/8	44 7/8	1/2+	115/208-230	5.47	L14-20P	660	134A

* Depth includes rear cutting board. Cutting board can be removed, to fit through entrance, and be reinstalled once in place.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055


RPI INDUSTRIES, INC. v9_18_19

VIENNA SELECT COLD


MODEL # VSCD-INS

PROJECT:



TOLL FREE: 800-525-3692

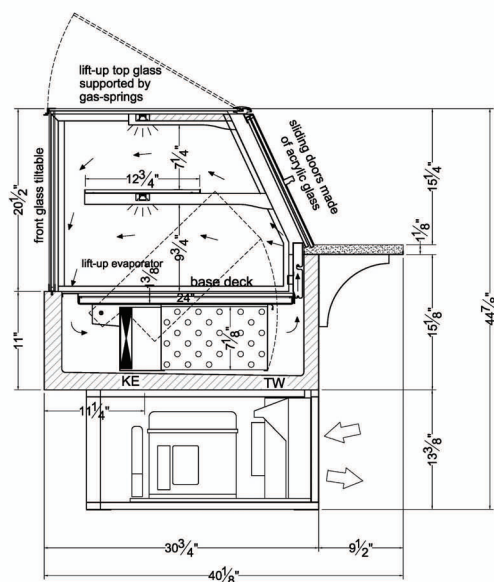

VSCD2-20-R-SQ-SC-INS

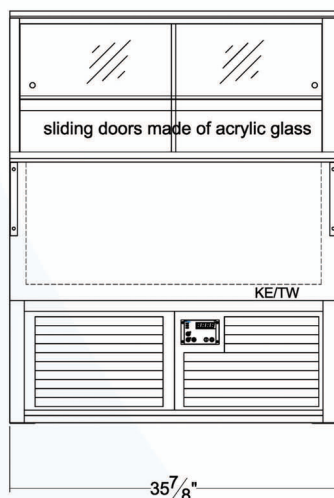


VSCD2

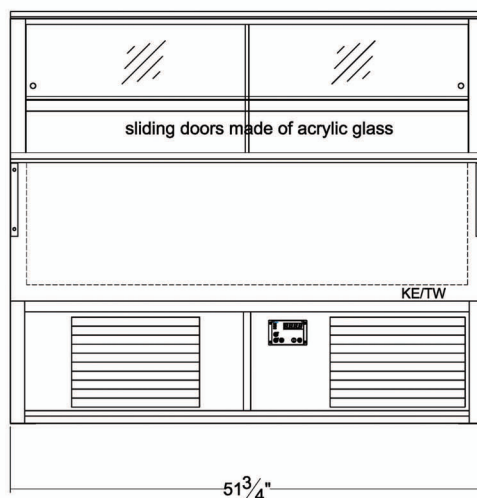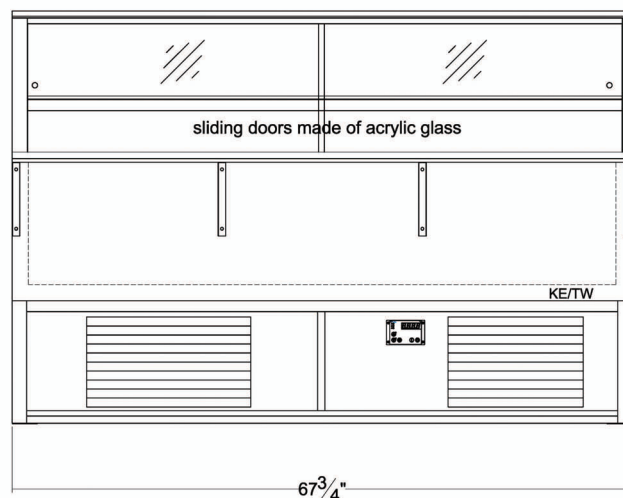**VSCD3****VSCD4**

- *Condensing unit easily slides out.*
DO NOT BLOCK this area.
- *Condensing unit requires adequate ventilation.*

1. A 1" diameter drain is provided. The drain **MUST** be run to a floor drain **AT TIME OF INSTALLATION**.
 2. RPI Merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet.
- Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

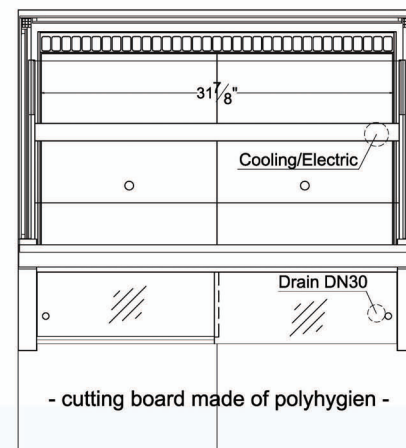

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

Electrical & Plumbing locations

RPI INDUSTRIES, INC. *v9_18_19*