



Model # STC-RIF-1  
STC-RIF-2

PROJECT NAME: \_\_\_\_\_ LOCATION: \_\_\_\_\_  
ITEM: \_\_\_\_\_ MODEL: \_\_\_\_\_

Top Mount Reach In  
Solid Door Freezer



Shown: STC-RIF-2

Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: stainless steel. Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Freezer is top mount condensing unit with capillary tube system, freezer temperature ranges -1° to -7°F. Refrigerant to be environmentally friendly with R290. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. Freezer door frames to have foam-in place heater wire. All single door units are field reversible. Doors stand open pass 90 degrees, self closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters to be factory mounted. Unibody construction with foamed sides from top to bottom, CFC free polyurethane insulation. ETL listed & ETL Sanitation Listed

FEATURES LIST

- Solid state thermostat w/ digital display
- Full length stainless handles
- Exterior stainless steel front and sides
- Interior stainless steel w/Interior LED Lights
- Field reversible 1-door unit
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions 2 door units
- Condensate door heater
- Environmentally friendly R290
- EZ slide out condenser
- Heater in condensate pan
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance sides, 2" rear
- WARRANTY: 2 years parts and labor; additional 3 years on compressor

\*Not suitable for installation in a non-commercial or residential applications.

Specifications are subject to change without notice


Approvals



072419



## PLAN VIEW

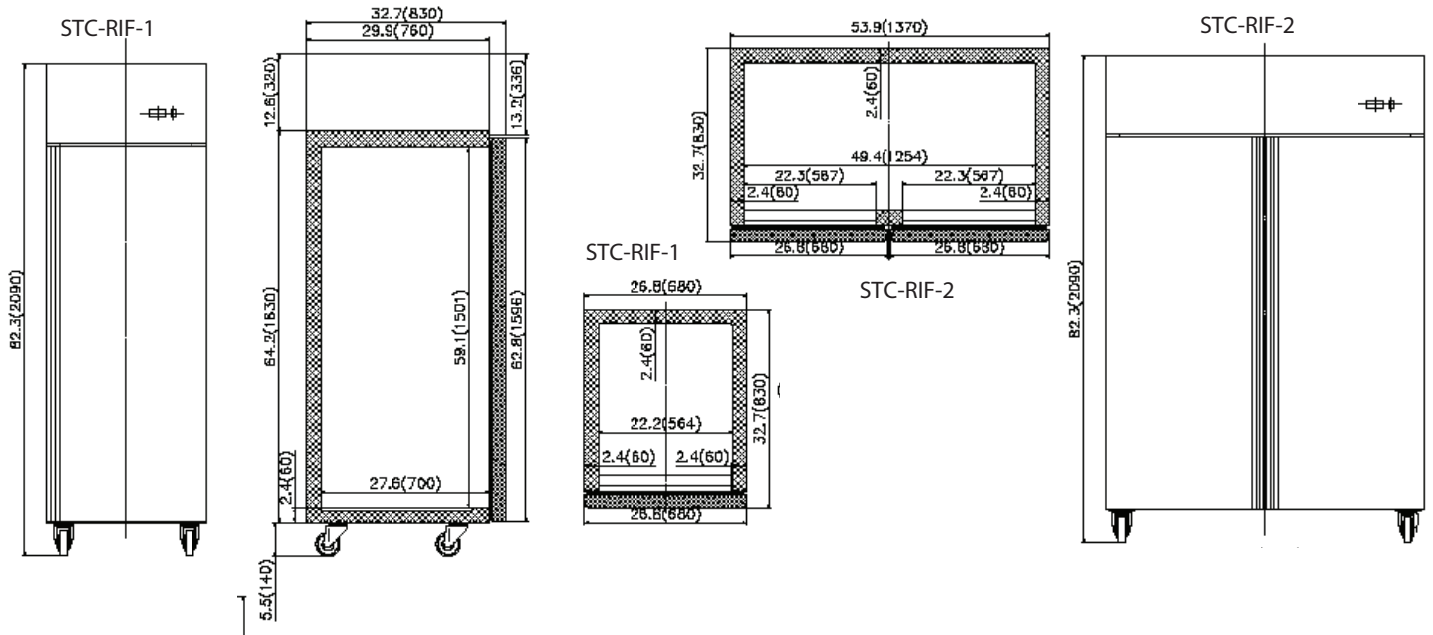

## DIMENSIONAL DATA

### STC-RIF-1

Capacity:  
1 swing door and 3 shelves

Dimensions:  
Overall Length = 27"  
Overall Depth = 32.7"  
Overall Height = 82.7"

HP: 5/8      BTU: 2000  
Voltage: 115/60/1 Amps: 11.0  
NEMA Plug: 5-15P  
Cord Length: 10

Shipping Information:  
Crated Weight: 364 lbs.

### STC-RIF-2

Capacity:  
2 swing doors and 6 shelves

Dimensions:  
Overall Length = 54"  
Overall Depth = 32.7"  
Overall Height = 82.7"

HP: 1      BTU: 3650  
Voltage: 115/60/1 Amps: 12.0  
NEMA Plug: 5-15P  
Cord Length: 10

Shipping Information:  
Crated Weight: 568 lbs.



Y-X: 208V~230V/60Hz  
W-Y: 115V/60Hz