



# Rosita Bisani

SPECIALTY FOOD SERVICES EQUIPMENT

Rotary Gas-Fired Oven  
Stainless - ST  
FGR150 Morello Forni



#### STANDARD FEATURES

- Gas oven with rotating cooking bedplate chamber.
- Constructed from high refractory premium grade alumina with heavy metal enclosure.
- Oven walls average 7" thickness with completely sealed wall enclosures.
- Double gas burner system in stainless steel.
- Internal dome burner and under bedplate gas burner system.
- Thermal insulation made of mineral fibre with high insulating properties; minimum 6" from top to bottom requiring 3" clearance to combustible materials.
- INTELTOUCH-MF10 Touch Screen Electronic Control System.
- Independent intuitive digital safety controls.
- Programmable time, speed, temperature and flame control system.
- Optimized performance and large productivity.
- Emergency Stop push button.
- 220/60/1

ITEM:

---

PROJECT:

---



DATE:

---


Rotary Gas-Fired Oven  
Stainless - ST  
FGR150



**Rosito Bisani**  
SPECIALTY FOOD SERVICES EQUIPMENT

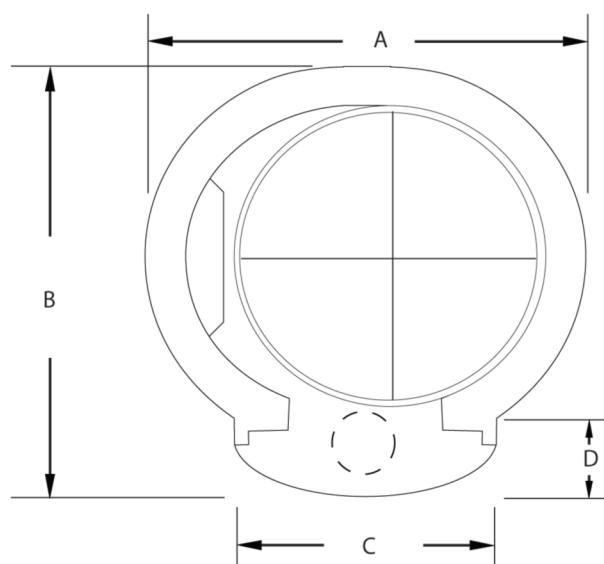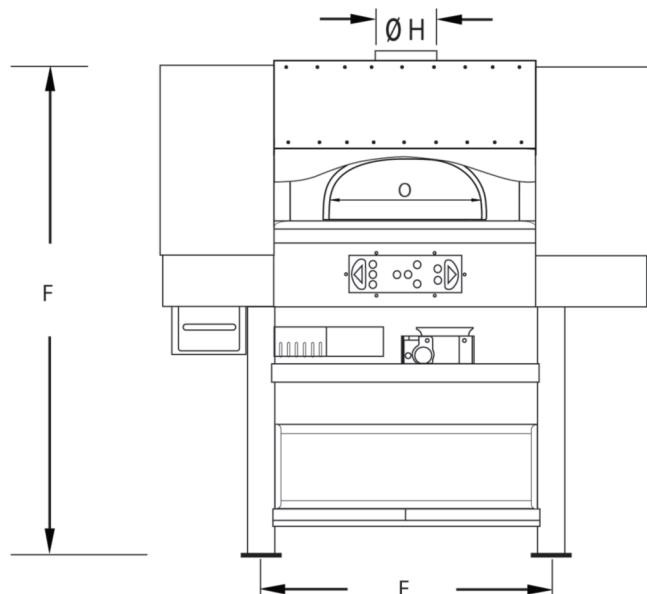

**Rotary Gas-Fired Oven**  
**Stainless - ST**  
**FGR150 Morello Forni**

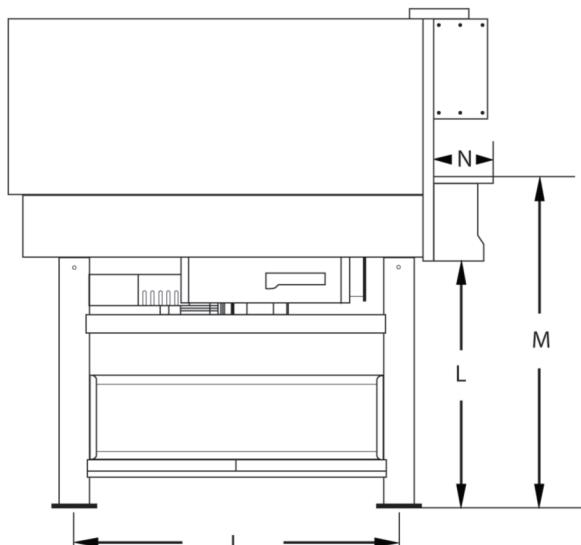

**FLUE CONNECTION**

All ovens are provided with an exhaust flue collar  $\frac{1}{2}$ " or  $2\frac{1}{2}$ " in height and 8" or 10" nominal diameter depending on model. The flue collar ( $\emptyset H$ ) is located on oven top to provide a secure connection to the chimney. The oven flue collar is designed to be connected to chimney listed to UL-103HT. When working on gas only ovens, the oven is suitable for connection to Type B Gas Vent when used with the draft hood. When burning wood, an independent Flue evacuation system is required.

**ELECTRICAL CONNECTION**

Verify the power supply has the same rating as the oven.

**AIR SUPPLY**

These ovens require make-up air to replace combustion air and excess air taken out by the flue. Always check for adequate openings to allow required make-up air flow in. Check table included in operations manual.

Model/ Specifications	FGR150 (59)	Cooking Time	
	Power	Capacity (14) x 11"	
Gas Fitting (inches)	$\frac{3}{4}$	Individual Pizza	2 ~ 3 minutes
BTU	169,000	Pan Pizza	4 ~ 6 minutes
Weight (lbs.)	5,953		

Model/ Dimension (inches)	A	B	C	D	E	F	$\emptyset H$	I	L	M	N	O
FGR-150 (59)	83.5	83.5	48	12	45	76.5	10	49.5	32.5	48	10	29.5

**Rosito Bisani Imports, Inc.**

940 South La Brea Avenue, Los Angeles CA, 90036

Tel: 323-937-1888 • Fax: 323-938-0728 • Toll Free: 1-800-848-4444

E-mail: sales@rosito-bisani.com

[www.rosito-bisani.com](http://www.rosito-bisani.com)

530 South Henderson Road, Suite F, King of Prussia PA, 19406

Tel: 610-265-5950 • Fax: 888-576-8524

**GAS-FIRED**



**LISTED**