
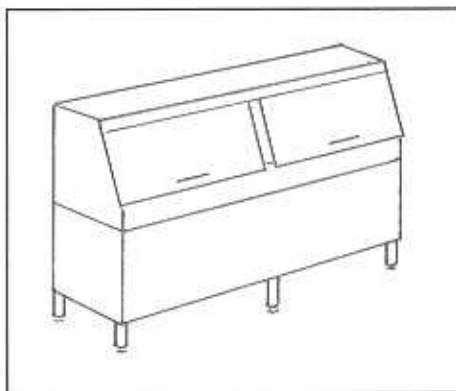
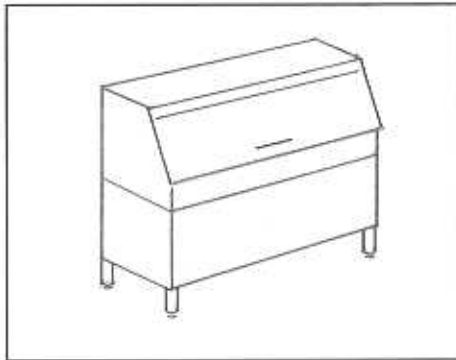


2 SECTION SERIES SLANT FRONT & LIFT-UP

- ♦ MODULAR, FOR LOCATIONS WHERE NARROW ACCESS OR STAIRS LIMITS INSTALLATION OF 400 TO 1200 POUND CAPACITY BINS.
- ♦ STAINLESS STEEL TOPS AND DOORS/RUNNERS.
- ♦ BIN DIVIDERS AVAILABLE.
- ♦ CUSTOM SIZES AVAILABLE; CALL FOR SPECIFICATION ASSISTANCE.

GENERAL SPECIFICATIONS

INTERIOR..... STAINLESS STEEL, TYPE 304, FULLY WELDED SEAMS.
 EXTERIOR..... POLISHED STAINLESS STEEL or STUCCO ALUMINUM.
 GALVANIZED STEEL BACK and BOTTOM (STAINLESS
 STEEL OPTIONAL).
 INSULATION..... 2" EXPANDED POLYSTYRENE.
 DRAIN..... 1" MPT, CENTER BOTTOM.
 LEGS..... 6" ADJUSTABLE with STAINLESS STEEL FEET.

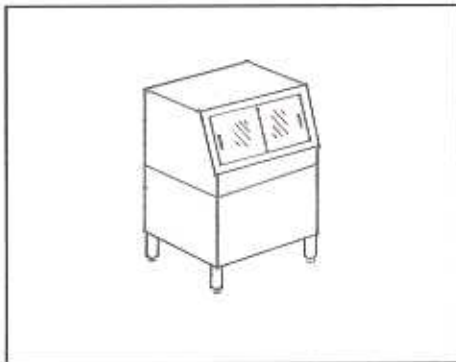

MODEL NUMBER	APPROX STORAGE (lbs.)	WIDTH (in.)	DEPTH (in.)	HEIGHT (in.)
S-500N-2PC	500	42 $\frac{1}{4}$	28 $\frac{1}{2}$	41
S-500-2PC	550	42 $\frac{1}{4}$	31 $\frac{1}{2}$	41
S-600-2PC	600	42 $\frac{1}{4}$	28 $\frac{1}{2}$	50
S-90-2PC	2300	90 $\frac{1}{4}$	40	52
SP-400-2PC	400	30 $\frac{1}{4}$	28 $\frac{1}{2}$	40
SP-450-2PC	450	30 $\frac{1}{4}$	28 $\frac{1}{2}$	46
SP-503-2PC	500	30 $\frac{1}{4}$	31 $\frac{1}{2}$	46
SP-500-2PC	500	42 $\frac{1}{4}$	28 $\frac{1}{2}$	40
SP-650-2PC	650	42 $\frac{1}{4}$	31 $\frac{1}{2}$	46
SP-742-2PC	750	42 $\frac{1}{4}$	34	46
LU-44-2PC	570	44 $\frac{1}{4}$	32 $\frac{1}{4}$	37
SP-600-2PC	600	48 $\frac{1}{4}$	30	40
SP-700-2PC	700	48 $\frac{1}{4}$	34	40
SP-900-2PC	900	48 $\frac{1}{4}$	31	50
LU-52N-2PC	950	52 $\frac{1}{4}$	31 $\frac{1}{2}$	50
LU-52-2PC	1000	52 $\frac{1}{4}$	34	50
LU-61-2PC*	1200	61 $\frac{1}{4}$	31	50
SP-850-2PC*	850	66 $\frac{1}{4}$	31 $\frac{1}{2}$	38
LU-66-2PC*	1160	66 $\frac{1}{4}$	31 $\frac{1}{2}$	47
LU-72-2PC	1380	72 $\frac{1}{4}$	32	50

Height includes 6" adjustable legs.
 * This model has two doors.

MGR EQUIPMENT CORP.

22 Gates Avenue, Inwood, New York 11096-1697

Phone: (516) 239-3030
 Fax: (516) 239-3602
 Toll Free: (800) 486-4647