



## ER50 SERIES

Free Standing Electric Fryers



Model 1ER50D

Shown with caster accessory



## SPECIFICATIONS

Electric deep fat fryer, Vulcan Model No. (1ER50A) (1ER50D) (1ER50C). Temperature controls are adjustable from 200°F to 390°F and multiple fat melt cycles and high limit control. Stainless steel cabinet with four 6" adjustable legs. 16 gauge stainless steel fry tank holds 50 lbs. of frying compound. 1½" Full port ball type drain valve. 17kW low watt density ribbon style heating elements. Twin fry baskets. Power supply is 208 volt, 50/60 Hz, 3 phase.

### Overall Dimensions:

15½"W x 34¾"D x 39⅞"H working height is 35¾".

NSF listed. CSA design certified.

**Specify voltage when ordering.**

Project \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

## MODELS

- ☐ **1ER50A:** Solid state knob control. Accurate temperature control 200°F to 390°F within +/- 2°. Multiple fat melt modes, fast recovery.
- ☐ **1ER50D:** Solid state digital read temperature control. Accurate temperature control 200°F to 390°F within +/- 2°. Multiple fat melt modes, fast recovery and boil out mode and two countdown timers.
- ☐ **1ER50C:** Computer control digital read temperature control. Accurate temperature control 200°F to 390°F within +/- 2°. Multiple fat melt modes, fast recovery and boil out mode. Ten programmable product keys and ten countdown timers. Secondary and advanced programming options.

## STANDARD FEATURES

- Stainless steel cabinet.
- Set of four 6" adjustable legs.
- 16 gauge stainless steel fry tank, 50 lb. capacity.
- Ten year limited fry tank warranty.
- 1½" full port ball type drain valve.
- 17 kW low watt density ribbon style heating elements.
- Multiple fat melt modes.
- High limit control.
- Twin fry baskets with plastic coated handles.
- 208 volt, 3 phase.
- One year limited parts and labor warranty.

## OPTIONAL FEATURES (FACTORY INSTALLED)

- ☐ 480 volt, 3 phase (NEMA 5-15P).  
(Separate 120 volt, 20 amp electric supply required.)  
**Not for sale in Canada.**
- ☐ Second year extended limited parts and labor warranty.

## ACCESSORIES (PACKAGED AND SOLD SEPARATELY)

- ☐ Stainless Steel Tank Cover – doubles as a work surface top
- ☐ Set of four 6" adjustable casters (2 locking)
- ☐ Extra set of Twin Fry Baskets – 6½"W x 13¼"D x 6"H
- ☐ Large Single Fry Basket – 13"W x 13¼"D x 5½"H
- ☐ Frymate™ VX15S Dump Station
- ☐ Connecting Kit(s) – connect two fryers together (banking strip, brackets and hardware)
- ☐ 10" high stainless steel removable splash guard

ER SERIES – Free Standing Electric Fryer

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_


## INSTALLATION INSTRUCTIONS

1. An adequate ventilation system is required for Commercial Cooking Equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
2. All models require a 6" clearance at both sides and rear adjacent to combustible construction.
3. All models require a 16" (407 mm) minimum clearance to adjacent open top burner units.
4. This appliance is manufactured for commercial installation only and is not intended for home use.

### SERVICE CONNECTIONS:

Ⓔ Power supply for basket lifts and/or filter motor is wired into the fryer's high voltage line terminal block, **except for 480V which requires a separate 120V single phase electrical power connection NEMA 5-15P service** (not supplied with fryer, and not available in Canada.).

**NOTE:** In line with its policy to continually improve its product, Vulcan reserves the right to change materials and specifications without notice.

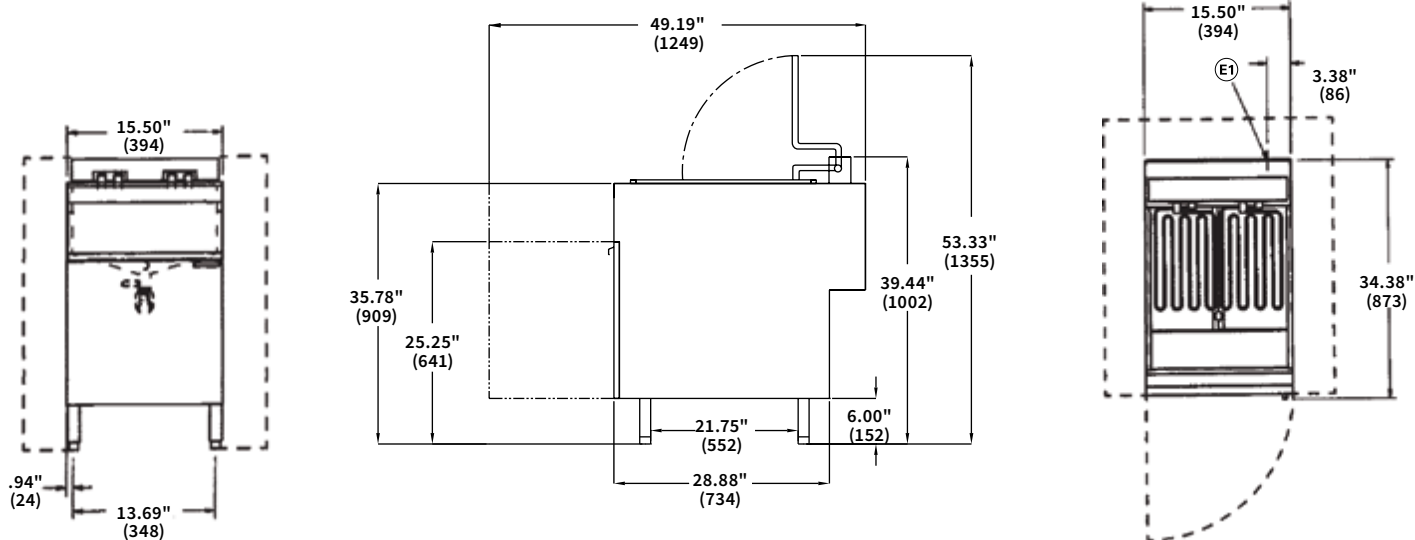

### ELECTRICAL CHARACTERISTICS

| Model Number | Total kW Connection | 3 PH Loading kW per Phase |          | Nominal Amps per Line Wire |    |    |          |    |    |
|--------------|---------------------|---------------------------|----------|----------------------------|----|----|----------|----|----|
|              |                     |                           |          | 3 Phase                    |    |    |          |    |    |
|              |                     | 208 volt                  | 480 volt | 208 volt                   |    |    | 480 volt |    |    |
|              |                     | X-Y                       | X-Z      | X                          | Y  | Z  | X        | Y  | Z  |
| 1ER50        | 17                  | 5.6                       | 5.6      | 47                         | 47 | 47 | 20       | 20 | 20 |

This appliance is manufactured for commercial use only and is not intended for home use.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.