

TILTING SKILLETS

GAS-FIRED, MANUAL TILTING
LEG MOUNTED
MADE IN USA

CLASSIC MODEL TGSE

STANDARD FEATURES



Model TGSE-2440-9 shown with optional
dual swing faucet & draw-off

- ◆ 304 stainless seam welded pan with:
 - ◇ Center trunnion mounted
 - ◇ Self-locking worm gear tilt mechanism
 - ◇ Rotation exceeds 90°
 - ◇ 304 stainless clad cooking surface
 - ◇ Electronic direct spark ignition
 - ◇ 120V, single phase (1Ø) standard
- ◆ Adjustable thermostat (175°F to 400°F)
- ◆ High limit safety thermostat
- ◆ 304 stainless patented safety lid, seam welded with:
 - ◇ Actuator-assisted counterbalance
 - ◇ Full width condensate drip shield
 - ◇ Full width rear steam vent
 - ◇ Single side-mounted safety handle
- ◆ 304 stainless, reinforced, water resistant consoles
- ◆ 304 stainless tubular frame construction
- ◆ Knockdown capability to fit through 26" x 66" opening
- ◆ Adjustable bullet feet

Legion equipment is built to comply with applicable standards for manufacturers. Approval agencies may include ASME, NSF, UL, ETL, AGA, CSA, CGA, and others. Legion reserves the right of design improvement or modification as warranted. U.S. Patent No. 5,865,101.

MODELS AND CAPACITIES					OPTIONAL FEATURES AND ACCESSORIES	
					See price list for supplemental information regarding options	
Model	2.5" Pans or Cooking Baskets	Griddle Area (in. ²)	Kettle (Gals.)	Oven Volume (ft. ³)	☐ Faucet bracket mounted on unit ☐ Single or double fill faucet with bracket & 12 or 18" swing nozzle ☐ 48" s/s flexible spray hose assembly (vinyl or stainless) for use with dual or single fill faucet ☐ Automatic water filling meter <i>(Call for information regarding additional faucet options)</i> ☐ Electric timer with buzzer ☐ Casters (two each locking /non-locking type) & restraining devices ☐ Flexible gas hose 1/2"x66" ☐ Quick disconnect, gas 1/2" ☐ Adjustable flanged feet ☐ In wall carrier for wall mounting ☐ Draw-off drain hose ☐ #10 can holder for draw-off ☐ Flat bottom scoop ☐ Perforated or solid 12x20 food pans 2½, 4, or 6" deep	☐ Perforated cooking/steaming basket (11 x 20½ x 5) ☐ Classic care kit ☐ Pour lip pan holder assembly ☐ Draw-off pan holder assembly ☐ Pour lip strainer ☐ Stationary side frame and tray Prison/Security Options: ☐ Fasteners (<i>screws & nuts</i>) ☐ Nut driver tool ☐ Screw driver tool ☐ Draw-off nut driver tool ☐ Lockable lid ☐ Lockable control cover
TGSE-2430-7	2	778	23	3.2		
TGSE-2430-9	2	778	30	4.1		
TGSE-2430-11	2	778	37	5.0		
TGSE-2440-7	3	1029	31	4.2		
TGSE-2440-9	3	1029	40	5.4		
TGSE-2440-11	3	1029	49	6.6		
Select gas: ☐ Natural or ☐ Propane Select voltage (1Ø only): ☐ 120V ☐ 208V ☐ 240V <i>(120V supplied with plug, 208 & 240V connect directly to box)</i> Select draw-off valve: ☐ 1½" ☐ 2" ☐ 3" with: ☐ compression or ☐ ball type fitting. <i>(see price list for other draw-off valve options)</i>						

Revision 999




LEGION® The Finest American Quality Since 1897
 LEGION INDUSTRIES, INC. ♦ 69 MAIN ST. ♦ DALLAS, PA 18612 ♦ (800) 833-9803 ♦ (570) 675-1575 ♦ FAX: (570) 675-7551

CLASSIC MODEL TGSE

GAS-FIRED, MANUAL TILTING
LEG MOUNTED
MADE IN USA

TILTING SKILLETS

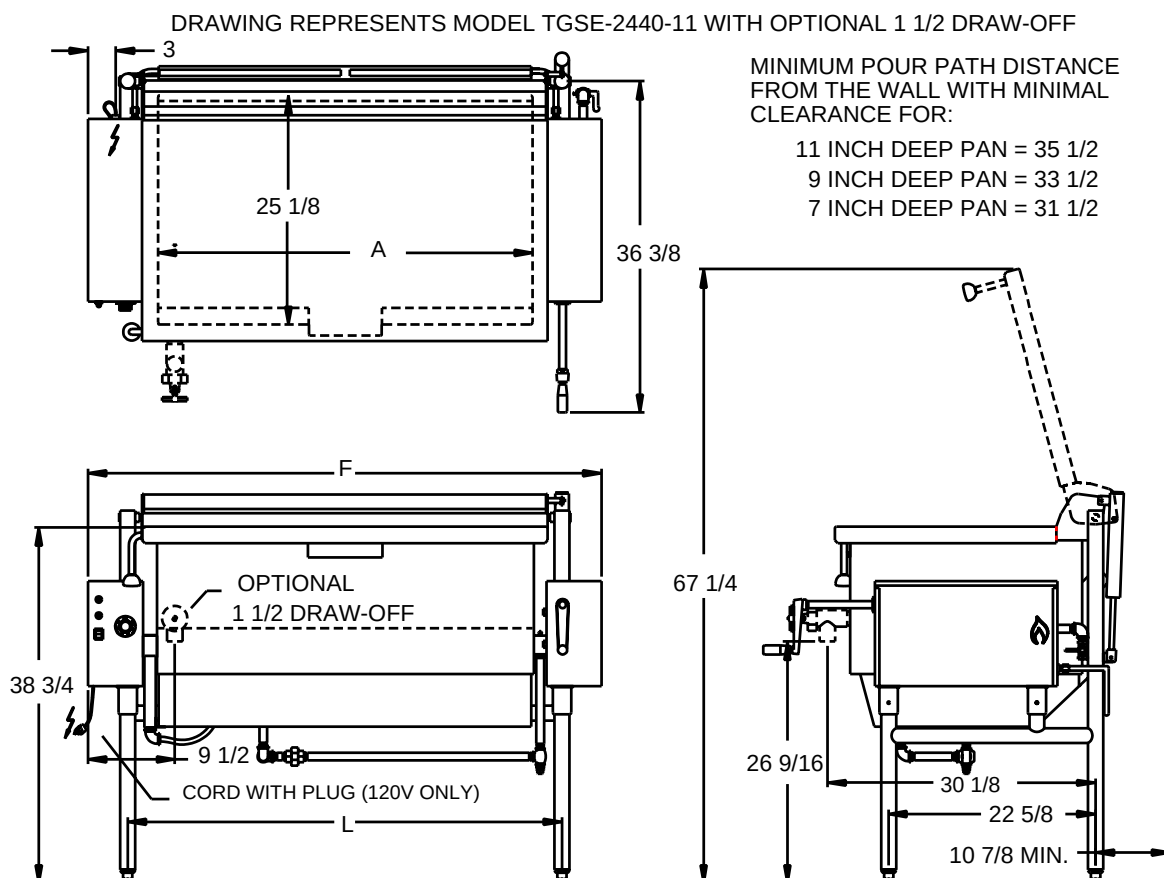

Note: Standard Electrical requirements are 120V, 1Ø, 1 amp

CLASSIC™ DIMENSIONS									
Model	Depth	A	F	L	Model	Depth	A	F	L
TGSE-2430-7	7	31.0	46.1	37.5	TGSE-2440-7	7	41.0	56.1	47.5
TGSE-2430-9	9	31.0	46.1	37.5	TGSE-2440-9	9	41.0	56.1	47.5
TGSE-2430-11	11	31.0	46.1	37.5	TGSE-2440-11	11	41.0	56.1	47.5

CLASSIC™ GAS SPECIFICATIONS				
Model	Gas Rating - Btu Input		Gas Pressure & Piping Specifications	
	Natural	Propane	Natural	Propane
TGSE-2430-()	90,000	75,000	Piping - 1/2" IPS	Piping - 1/2" IPS
TGSE-2440-()	120,000	100,000	Inlet Pressure Range, 5.0-7.0" w.c. Outlet Pressure Setting, 3.5" w.c.	Inlet Pressure Range, 12.0 - 14.0" w.c. Outlet Pressure Setting, 10.0" w.c.

U.S. Patent No. 5,865,101

Revision 999



LEGION

The Finest American Quality Since 1897

LEGION INDUSTRIES, INC. ♦ 69 MAIN ST. ♦ DALLAS, PA 18612 ♦ (800) 833-9803 ♦ (570) 675-1575 ♦ FAX: (570) 675-7551