



Project:

Item Number:

Quantity:

CAYENNE® DROP-IN WARMERS



Cayenne® Drop-in Warmers

DESCRIPTION

Cayenne® Drop-in Warmers are designed with a self-insulating, energy efficient thermoset well for ease of installation in solid-surface, laminate, or metal countertops. Minimal heat transfer to the work surface allows the drop-ins to be installed without a thermal breaker strip.

All thermoset well drop-ins have a high-efficiency cast aluminum dome element positioned in the bottom of the well for direct energy transfer. Dome element requires that the unit must be used with water in the well. All units include a standard drain and drain valve.

PERFORMANCE CRITERIA

Cayenne® Drop-in Warmers are designed to hold heated prepared foods at temperatures above the HACCP "danger zone" of 140° F (60° C). The performance standard is measured using the NSF mixture preheated to 165° F (73.9° C). The unit will hold the temperature of this product above 150° F (65.6° C). The temperature will be maintained best when the food product is held using pans with covers, the proper water level is maintained in the well, and the food product is stirred regularly.

Agency Listings



Due to continued product improvement, please consult www.vollrathco.com for current product specifications.

MODELS

- 72105 Model 3001D Drop-in Warmer with Drain, Front-Mounted Control (US and Canada)
- 72107 Model 3002D, Drop-in Warmer with Drain, Remote Control (US and Canada)
- 72610 Model 3001 Drop-in Warmer with Drain, Front-Mounted Control, Schuko Plug (Export Only)
- 72560 Model 3001D Drop-in Warmer with Drain, Front Mounted Control, UK Plug (Export Only)

FEATURES

- Features Vollrath's Direct Contact Heating System in which the heating element is in direct contact with the water for the most efficient heat transfer possible
- Thermoset fiber-reinforced self-insulating resin well provides maximum energy efficiency, prevents scale build-up and is easy to clean
- Cast-in non-stick aluminum dome heating element uses up to 25% less energy and reduces scale build-up for easy cleaning and longer operating life
- Top mounting installation
- Wide dripless lip catches and drains moisture back into the well and creates more uniform fit with food pans and insets
- Increased water capacity reduces labor costs and improves food quality by maintaining maximum moist heat
- Capillary tube thermostat control supplies constant temperature and power only when needed for maximum power efficiency
- 10 temperature range settings, from approximately 80-85° F (27-30° C) to 200° F (94° C)
- Lighted On/Off switch
- Meets NSF4 Performance Standards for rethermalization and hot food holding equipment

72105, 72610 and 72560

- Recessed controls reduce accidental changes in temperature settings
- Bottom exit 6 ft. (183 cm) power cord adapts to receptacle location for safe installation and allows for 360° control placement

72107

- Remote dials for easy temperature setting and maintaining accuracy
- 2 ft. (5.1 cm) control cable in flexible conduit for remote installations

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals	Date



Setting the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

CAYENNE® DROP-IN WARMERS



MODELS

<p>72105 Model 3001D Drop-in Warmer with Drain, Front-Mounted Control (US and Canada)</p> <p>72107 Model 3002D, Drop-in Warmer with Drain, Remote Control (US and Canada)</p>	<p>72610 Model 3001 Drop-in Warmer with Drain, Front-Mounted Control, Schuko Plug (Export Only)</p> <p>72560 Model 3001D Drop-in Warmer with Drain, Front Mounted Control, UK Plug (Export Only)</p>
---	--

DIMENSIONS


Dimensions shown in inches (cm).

72105 / 72610

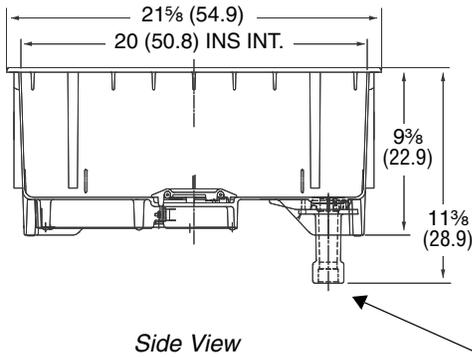
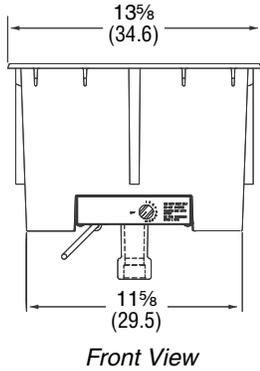


3/4" (1.905 cm) NPT threaded drain tube

72107 / 72560

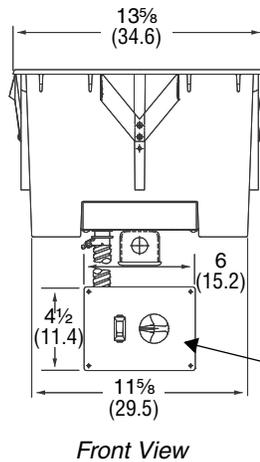

Control panel with lighted switch and temperature control

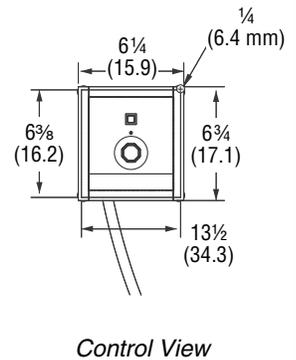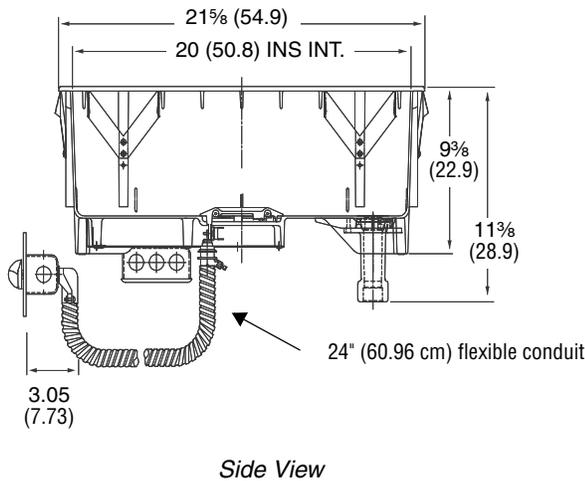

SPECIFICATIONS

Item	Overall Dimension (L X W X H)	Well Depth In (CM)	Cutout Dimension	Control Cutout Dimension	Voltage	Watts	Amps	Plug
72105	21 3/4 x 13 3/4 x 9 (55 x 33 x 23)	6 5/8 (16.8)	12 7/8 x 20 7/8 (32.7 x 53)	N/A	120	700	5.8	5-15P
72107	21 3/4 x 13 3/4 x 9 (55 x 33 x 23)	6 5/8 (16.8)	12 7/8 x 20 7/8 (32.7 x 53)	3 1/2 x 5 (8.9 x 12.7 cm)	120	700	5.8	Hard Wire
72610	21 3/4 x 13 3/4 x 9 (55 x 33 x 23)	6 5/8 (16.8)	12 7/8 x 20 7/8 (32.7 x 53)	N/A	230	700	3.0	Schuko
72560	21 3/4 x 13 3/4 x 9 (55 x 33 x 23)	6 5/8 (16.8)	12 7/8 x 20 7/8 (32.7 x 53)	N/A	230	700	3.0	UK

Receptacles

