



Outperform every day.™

Project:
Item Number:
Quantity:

Three-Well Modular Hot Drop-ins with Marine-Grade Wells

The Vollrath Company, L.L.C.

THREE-WELL MODULAR HOT DROP-INS WITH MARINE-GRADE WELLS



Bottom view

DESCRIPTION

Vollrath's Three-Well Modular Hot Drop-ins with Marine-Grade Wells keep hot foods at proper serving temperatures. They are designed for top-mount installation and do not require hard-wiring.

SHORT DESCRIPTION

Three-well hot-drop-in, full-size wells are marine-grade stainless steel, removable bottom panel, standard or manifold drains, insulated on all non-exposed sides, cord with plug, stainless steel remote control panel, mounting clips.

Note: Orders for drop-ins cannot be canceled or returned.

Note: Drop-in meets NSF4 performance standards only when using moist heat. Operation with water is required for even heating of the food product.

Item Numbers			Description	
Standard	Manifold	Manifold w/ Auto-Fill	Control	Voltage
1000 Watts Per Well				
3640401HD	3640451HD	3640461HD	Infinite	120
3640411HD	3640471HD	3640481HD	Thermostatic	
3640501HD	3640551HD	3640561HD	Infinite	208-240
3640511HD	3640571HD	3640581HD	Thermostatic	
625 Watts Per Well				
36404HD	3640450HD	3640460HD	Infinite	120
3640410HD	3640470HD	3640480HD	Thermostatic	
36405HD	3640550HD	3640560HD	Infinite	208
3640510HD	3640570HD	3640580HD	Thermostatic	
36473HD	3647350HD	3647360HD	Infinite	240
3647310HD	3647370HD	3647380HD	Thermostatic	

FEATURES

- Drawn wells are marine grade stainless steel (SAE Type-316).
- Removable panel at the bottom of each well for service access
- Include gasket for under drip edge
- Standard drain is ½" (1.3 cm) with individual well ball valves
- Manifold drain is 1" (2.5 cm) copper tubing with master manifold shut off
- Insulated on all sides, including between each well
- Includes 6' (1.8 m) cord with plug. Does not require hard-wiring
- Stainless steel control panel with individual controls and power indicator light for each well
- Control panel has 4' (121.9 cm) tethered connection for flexible mounting locations
- Includes standard mounting clips for use on counters up to 3" (7.6 cm) thick for easy installation
- Accepts full-size and fractional pans up to 6" (15.2 cm) deep
- Adapter bars are recommended when using fractional pans

WARRANTY

All models shown come with Vollrath's two-year warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

ACCESSORIES

- Sheet pan adapter available. Item No. 19186.

CLEARANCE AND ENVIRONMENT REQUIREMENTS

- Zero-clearance installation
- Indoor use only. Room temperature and HVAC can effect performance temperatures

Agency Listings



Due to continued product improvement, please consult www.vollrath.com for current product specifications.

Approvals	Date



Outperform every day.™

www.vollrath.com


The Vollrath Company, L.L.C.

1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Main Tel: 800.624.2051 or 920.457.4851
Main Fax: 800.752.5620 or 920.459.6573
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560




Technical Services
techservicereps@vollrathco.com
Induction Products: 800.825.6036
Countertop Warming Products: 800.354.1970
All Other Products: 800.628.0832

THREE-WELL MODULAR HOT DROP-INS WITH MARINE-GRADE WELLS

DIMENSIONS (Shown in inches (cm))

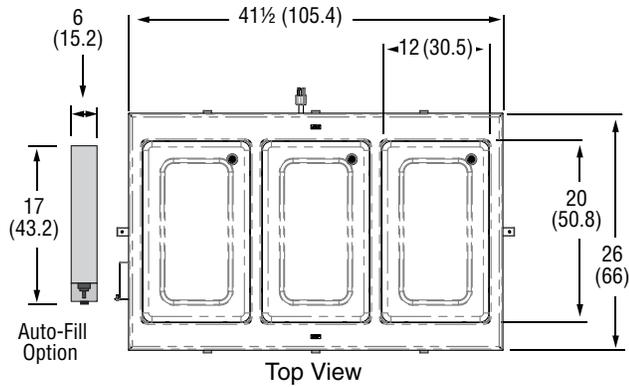

Control Panel Cutout

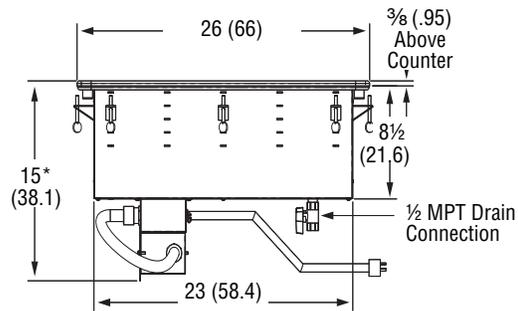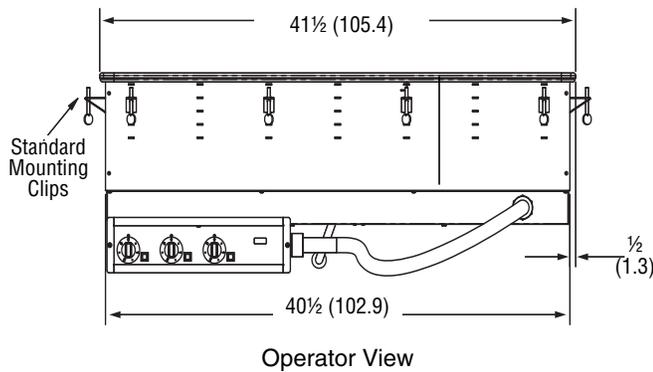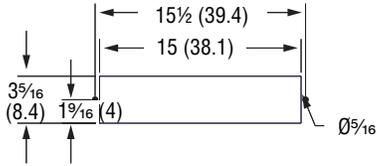

*Manifold drain adds 6 1/2 (16.5) to overall height



Side View

ELECTRICAL SPECIFICATIONS

Standard	Manifold	Manifold w/ Auto-Fill	Control	Cutout Dimension IN (CM)	Voltage	Amps	Plug
1000 Watts Per Well							
3640401HD	3640451HD	3640461HD	Infinite	40 3/4 x 25 1/4 (103.5)	120	25	NEMA 5-50P
3640411HD	3640471HD	3640481HD	Thermostatic				NEMA 6-20P
3640501HD	3640551HD	3640561HD	Infinite		208-240	10.8-12.5	NEMA 5-50R
3640511HD	3640571HD	3640581HD	Thermostatic				NEMA 6-20R
625 Watts Per Well							
36404HD	3640450HD	3640460HD	Infinite	40 3/4 x 25 1/4 (64.1)	120	15.6	NEMA 5-20P
3640410HD	3640470HD	3640480HD	Thermostatic				NEMA 6-15P
36405HD	3640550HD	3640560HD	Infinite		208	9.0	NEMA 5-20R
3640510HD	3640570HD	3640580HD	Thermostatic				NEMA 6-15R
36473HD	3647350HD	3647360HD	Infinite		240	7.8	NEMA 5-20R
3647310HD	3647370HD	3647380HD	Thermostatic				NEMA 6-15P

Note: Cutout must have a 7/8" (2.2 cm) corner radius.

Straight Blade Receptacles

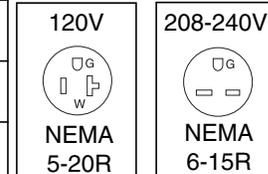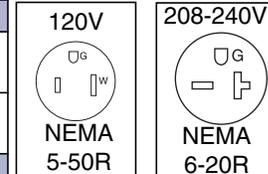

NOTICE: Do NOT modify the cord or plug on the drop-in. Modifying any component may damage the drop-in or cause injury, and will void the warranty.



Outperform every day.™

www.vollrath.com

The Vollrath Company, L.L.C.

1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Main Tel: 800.624.2051 or 920.457.4851
 Main Fax: 800.752.5620 or 920.459.6573
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560

Technical Services
techservicereps@vollrathco.com
 Induction Products: 800.825.6036
 Countertop Warming Products: 800.354.1970
 All Other Products: 800.628.0832