

Fryers

Standard Features

- Stainless steel exterior and interior
- Welded stainless steel tank
- Heavy duty burners with a standing flame, standby pilots
- High quality millivolt thermostat (T-Stat) maintains select temperature automatically between 200°F – 400°F
- Oil cooling zone in the bottom of the tank captures food particles and extends oil life
- Safety valve with an automatic voltage stabilizing function
- Self-reset high temperature limiting device
- Two (2) nickel plated baskets with coated handles standard
- Wire mesh crumb screen and basket hanger standard
- Available in Natural & Propane gas
- 3/4" NPT rear gas connection and regulator
- Four (4) casters standard

Optional Accessories

- Leg kit part #: 301110006
- Fryer splash guard part #: 21101001047
- ATFS-40ES & ATFS-50ES Fryer cover #: 21201001019
- ATFS-75ES Fryer cover #: 21201003015
- Joiner strip #: 21101001046

MODELS:

ATFS-40ES / ATFS-50ES / ATFS-75ES



ATFS-40ES



ATFS-50ES



ATFS-75ES



1 YEAR PARTS AND LABOR WARRANTY



Conforms to ANSI
STD 283.1 11b-2009 (2011)
Certified for CSA
STD 1.4B-2009 (2011)
Conforms to NSF/ANSI STD.4




REV. 06/25

“WE MAKE THE KITCHEN BETTER!”

SPECIFICATIONS

Models	Burners and Control Method	Gas Type	Intake-tube Pressusre (in.W.C.)	Per BTU B.T.U./h	Total BTU B.T.U./h	Regulator	Basket Dimensions (inch)	Exterior Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
ATFS-40ES	3 Burners, Independent Manual Control	NG	4	22,000	66,000	4" w.c.	13 ^{3/10} ×6 ^{1/2} ×5 ^{9/10}	15 ^{5/8} ×30 ^{1/8} ×44 ^{3/8}	131	160
		LP	10	20,000	60,000	10" w.c.				
ATFS-50ES	4 Burners, Independent Manual Control	NG	4	22,000	88,000	4" w.c.	13 ^{3/10} ×6 ^{1/2} ×5 ^{9/10}	15 ^{5/8} ×30 ^{1/8} ×44 ^{3/8}	143	171
		LP	10	20,000	80,000	10" w.c.				
ATFS-75ES	5 Burners, Independent Manual Control	NG	4	22,000	110,000	4" w.c.	13 ^{3/10} ×9 ^{1/2} ×5 ^{9/10}	21 ^{1/8} ×30 ^{1/8} ×44 ^{3/8}	168	200
		LP	10	20,000	100,000	10" w.c.				

PLAN VIEW

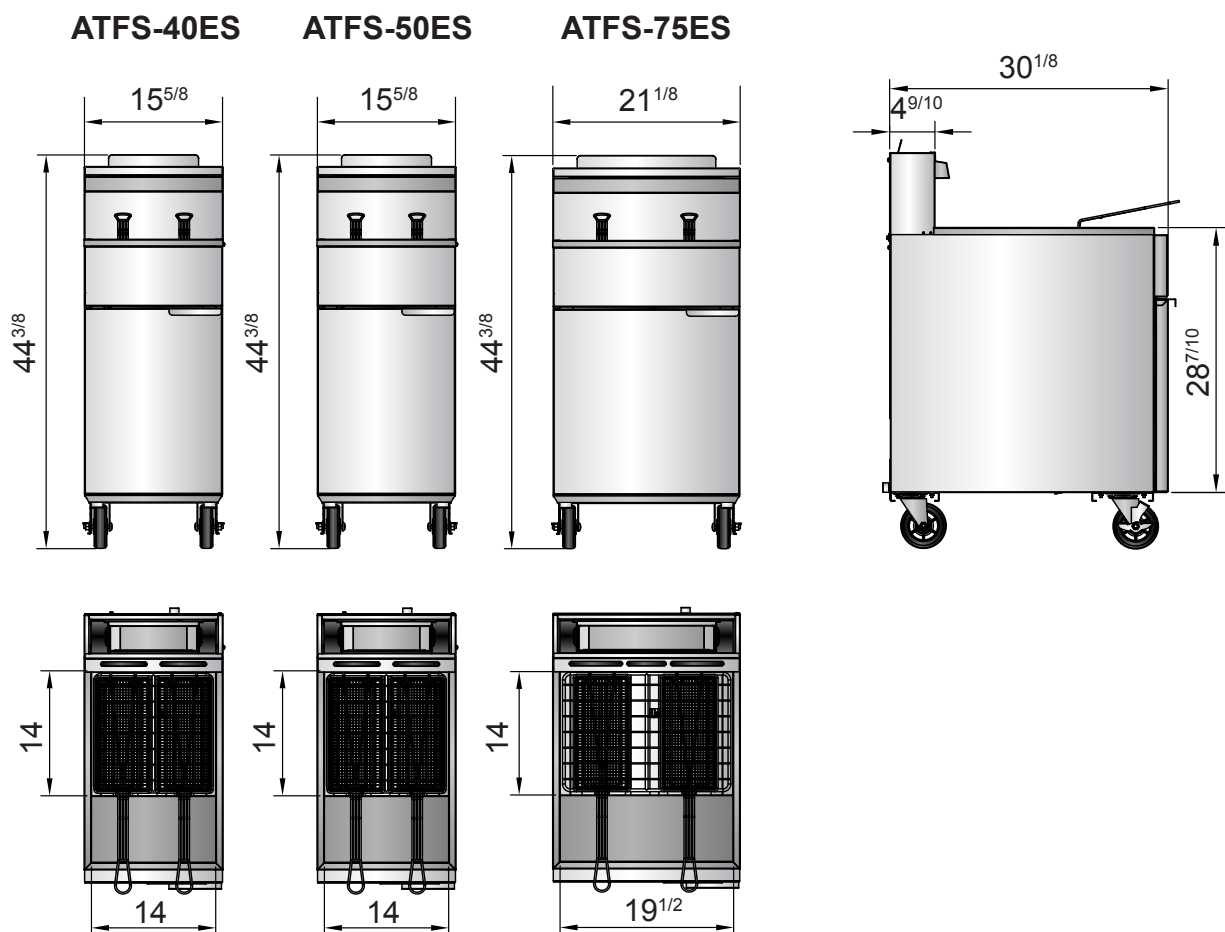

Stainless steel tank



Baskets



Basket hanger



Temperature limiting device

