




America's Oldest Stove Company
(Est. 1838)

48" Wide Range

Model: F3430-24-2RB

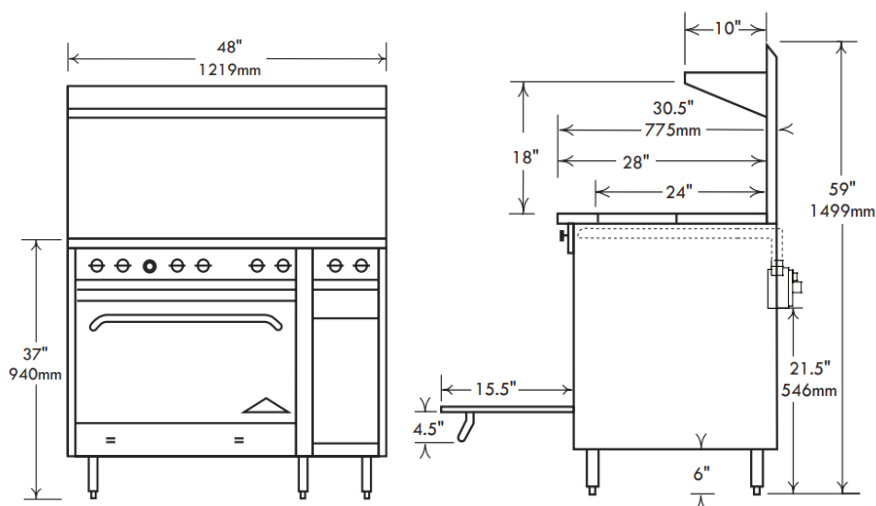

Standard Features & Benefits

CONSTRUCTION: Easy cleaning, corrosion resistant stainless steel finish, welded with angel iron and aluminized inner framing. Sturdy 6" heavy duty stainless pipe legs with adjustable feet. Double wall construction with heavy insulation for cooler operation. Installation clearances for non-combustible surfaces are 0" on sides and 0" in the rear, combustible surface clearances are 2" and 2".

Ovens: Large oven measures 31.5" w x 22" d x 14" h for superior baking characteristics and results. Heavy insulation for fuel efficiency. Easy cleaning porcelain and aluminized linings with one nickel plated rack. 3 rack positions with 2.75" between rack positions. Large oven features long life, 30,000 BTU cast iron "H" pattern oven burner. Special "V" shaped baffle directs heat for excellent air circulation.

CONTROLS: Includes 500° thermostat, 100% safety shut off, automatic standing pilot and brass top burner valves. Pressure regulators are set at the factory for the gas specified. Optimal pressures are 4" WC for natural gas and 10" WC for propane. Manifold size is 3/4" NPT. All controls are tested and confirmed in good working order. Calibration and adjustments are the responsibility of the buyer.

GRIDDLE PLATE: 12" increments have 24,000 BTU cast iron burners replacing front to back open burner pairs. 3/4" thick griddle plate is standard. SS splash guards tapering to 4". Front grease trough and large capacity grease catch.

CHAR-BROILERS: 12" increments have 30,000 BTU cast iron burners replacing front to back open burner pairs. Flare up reducing cast iron top grades and radiance for superior heat retention. Front grease trough and large capacity grease catch. SS splash guards tapering to 4". Char-broilers are approved for use in non-combustible locations only.

ACCESSORIES & OPTIONS: Convection fan, casters, extra racks, FD oven thermostats, chrome griddles, 1" thick griddle plates, griddle thermostats, safety pilot griddles, hose and quick disconnects, and low backs are some of the standard options available.

SPECIFICATIONS

Model #	Width	Depth	Height	Oven Width	Storage Space
F3430-24-2RB	48"	30.5"	59"	31.5"	10" W



* See website for full warranty



WARNING: This product can expose you to certain chemicals, which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to: www.P65Warnings.com



NOTICE: In an ongoing effort of product development & improvement, Comstock-Castle reserves the right to change specifications and product design without notice. Such modifications do not entitle the buyer to corresponding changes or replacements for previously purchased equipment.



Comstock-Castle Stove Co. • 119 Washington St. Quincy, IL. 62301
Tel.: 217-223-5070 Fax: 217-223-0007 Web: www.castlestove.com

