




| Project: | | AIA# |
|----------|------|------|
| Item #:_ | Qty: | SIS# |
| Model #: | | |

Black Forest Towers



Standard Features

- 1/4" stainless steel shanks with 3/16" restriction lines
- · All stainless steel mirror finish faucets
- Available in mirror finish or polished brass* (*NOTE: Polished brass towers provided with mirror finish drain pan and polished brass perforated insert)
- Surface-mount, stainless steel drain pan with removable, perforated insert

Configurable Options

- 2 or 3 faucets
- Mirror or polished brass finish
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Numerous ceramic color finishes; consult factory for details
- Rinser faucet extension to the left or right of the drain pan; specify RFE option

Specifications

Materials

- Miscellaneous ceramic, stainless steel, and brass parts in dispensing tower
- 20 gauge stainless steel parts include drain pan and perforated inserts

Shank Sizes

• 1/4" I.D. with 3/16" fitting

Drains

• 1/2" tailpiece on drain pan

Rinser Faucet (optional)

- Accepts 3/8" cold water lead
- · 30 psi water pressure regulator included
- 1.2 gallons per minute

Optional Rinser Faucet

Installation Notes

- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)



Rinser Faucet Assembly

Annow Street

Intertek

4004503 Conforms to NSF/ANSI STD 372


Glastender, **Inc.** • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.


Approval/Notes:

Rev. 06-17-25

Drawings



BFT-2-MF SHOWN

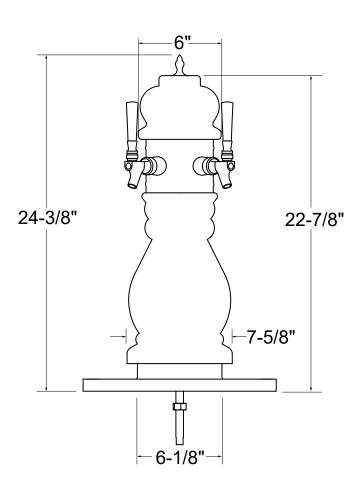

14"-13-7/8" 7/8" 3-7/8" 5-5/8"→

FRONT ELEVATION

SIDE ELEVATION