

# VICTORY<sup>®</sup>

## ULTRASPEC

PROJECT: \_\_\_\_\_

ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_

MODEL # \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

## SOLID DOOR ROLL-THRU WARMING CABINET

### HIS-2D-1-PT



### EXCLUSIVE WARRANTY

- ▶ 7 Year Parts & Labor Warranty
- ▶ Exclusive 2 Year Warranty On Magnetic Door Gaskets
- ▶ Lifetime Warranty On Handles & Hinges (parts only)



### CABINET CONSTRUCTION

- Stainless Steel Interior And Exterior (galvanized back, top and bottom)
- Heavy-Duty Cam Hinges
- Stay-Open Door Feature For Easy Product Loading
- Heavy-Duty 20 Gauge Stainless Steel Door
- Heavy-Duty Cylinder Locks
- Stainless Steel Interior Door Liner
- Adjustable Door Wiper Gaskets
- One-Piece, Snap-In Magnetic Door Gaskets
- Low Profile Vertical Door Handles
- Hinged Front Shroud
- Stainless Steel Breaker Caps
- Accepts Carts: 26 1/2"W x 28"D x 65"H (cart not included)
- 8' Cord And Plug (see electrical data for details)

### FEATURES

- Full Electronic Control With Touchpoint Interface
- Adjustable Electronic Temp Control from 80°F To 180°F
- Built-In, Adjustable Humidity Control Vent
- Safety Shielded Strip Type Heating Elements
- Externally Mounted Blower Maintains Even Temperatures
- Manager's Lockout Feature



Please Verify Qualifying Units By Visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

### OPTIONS & ACCESSORIES

- Stainless Steel Back And Shroud
- Door Swing Orientation (at time of order)
- Correctional Package
- Exterior Door Laminate
- Glass Door

3779 Champion Blvd, Winston-Salem, NC 27105




ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 3/6/25 Printed in U.S.A.

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

SOLID DOOR ROLL-THRU WARMING CABINET

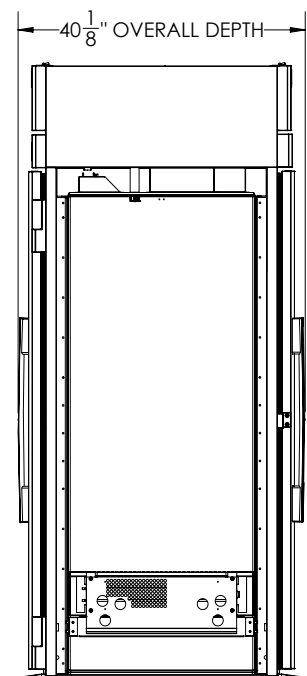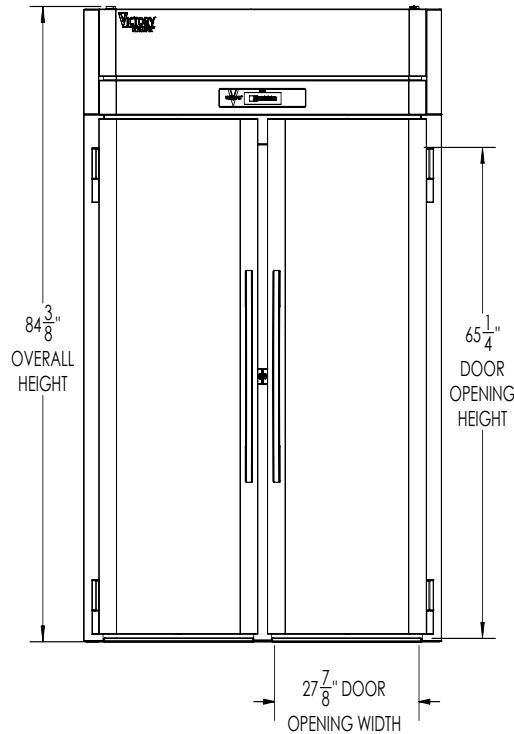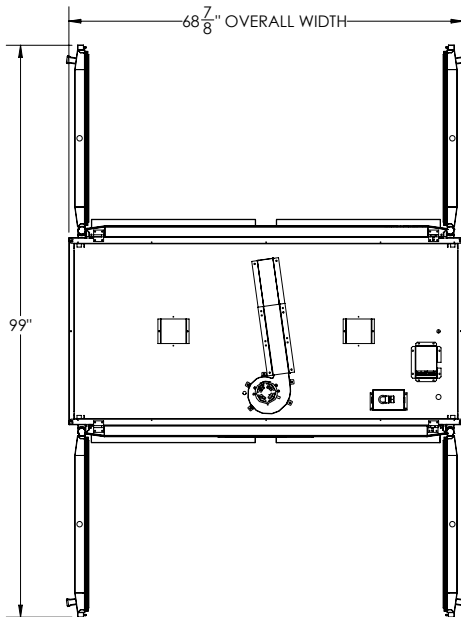

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top clearance is required

| CHARACTERISTICS              |                   | ELECTRICAL DATA |              | SHIPPING DETAILS |         |  |  |
|------------------------------|-------------------|-----------------|--------------|------------------|---------|--|--|
| Net Capacity (cubic ft.)     | 72.4              | Cabinet Voltage | 208-240/60/1 | Height           | 88"     |  |  |
| Width, Overall (in.)         | 68 7/8"           | Total Amperes   | 13           | Width            | 84"     |  |  |
| Depth, Overall (with handle) | 40 1/8"           | NEMA Plug       | 6-20P        | Depth            | 45"     |  |  |
| Height Overall               | 84 3/8"           | HEATING DATA    |              | Crated Weight    | 662 lbs |  |  |
| Depth, Door Open 90°         | 99"               | Heater Watts    | 3000         |                  |         |  |  |
| Door Openings (in.)          | 27 7/8" x 65 1/4" |                 |              |                  |         |  |  |
| No. Of Doors                 | 4                 |                 |              |                  |         |  |  |

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com | VictoryRefrigeration.com

Rev. 3/6/25 Printed in U.S.A.