

# NOW WITH LUMINICE

# KT-1000 Ice Kube Machine

#### **Models**

KDT-1000A



Ice Machine Electric

230V / 50Hz / 1Ph

Minimum circuit ampacity:

Air-cooled. 11 3 Maximum fuse size: Air-cooled: 15 Amps

# **Specifications**

#### **BTU Per Hour:**

13,300 (average) and 16,300 (peak)

#### Refrigerant:

R410A CFC - Free Lowers global warming by 48%

#### **Operating Limits:**

- · Ambient Temperature Range: 40° to 110° F (4.4° to 43.3°C) Water Temperature Range: 40° to 90°F (4.4° to 32.2°C)
- · Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)

Esfuerzo National No. 12 Int. M

Colonia Alice Blanco

Naucalpan de Juarez

53370 Estado de Mexico

Koolaire by Manitowoc ice machines are designed, developed and tested by Manitowoc engineers to provide great ice production, energy efficiency and reliable service at an affordable price.

#### Performance/Features/Benefits

- Produces up to 854 lbs (387 kg) of ice per day\*\*
- Performance certified by the Air Conditioning, Heating and Refrigeration Institute (ÁHRI)
- Energy Efficient models visit EnergyStar.gov to view all Energy Star qualifying models
- · Highly efficient electro-less nickel plated copper evaporators made in Manitowoc WI, USA
- Simple operation only one control, three positions ON/OFF/
- High-Tech exterior with smudge and fingerprint resistant stainless-like finish
- Better for the environment. Uses R410A refrigerant which lowers global warming potential by 48%
- Backed by the industry's best Manitowoc distribution network and service agents

#### **Built for Easy Sanitation**

- Easy access front facing evaporator
- · One-touch remedial cleaning; requires minimal interaction; just add chemical and let the machine do the rest. No ice removal from bin needed. (Use Manitowoc De-scaler and
- For detail cleaning; all food zone components removable by hand (no tools required). Fast and easy
- All white plastic interior, no exposed tubes or wires, smooth rounded corners for fast easy wipe downs
- The food zone is sealed from above and on the back of the door panel with commercial grade rubber gaskets
- Alpha San anti-microbial agent molded in selected components
- Available LuminIce II Virus and Bacteria Inhibitor Controls viruses, bacteria, mold and yeast within the food zone to keep the machine clean longer
- \*\*based on 70F air / 50F water

## **Ice Shape**



7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm)

<u>\*\*</u> = 100%

























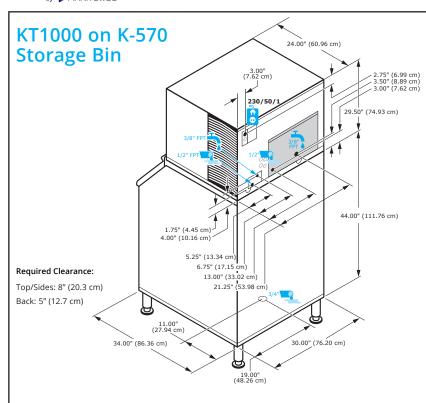

### **Space-Saving Design**



KT1000 K-570

76.2 cm

79.5" Height 202.93 cm

30.00" Width

34.00" Depth

86.30 cm

532 lbs. Bin 241 kgs. Storage

Measurements with bin legs at 6.00" (15.24cm). Adjustable bin legs 6.00" to 8.00" (15.24cm to 20.32cm). Bin capacity is based on 90% of the volume x 33 lbs/ft 3 average density of ice.

# **Specifications**

			Ice Production 24 Hours		Power Usage kWh/100 lbs. @90°Air/70°F	Potable Water
	Model	Ice Shape	70°/ 50°F 21°/ 10°C	90°/ 70°F 32°/ 21°C	1 Ph	Usage/100 lbs. 45.4 kgs. of Ice
AIR COOLED	KDT-1000A	kube	854 lbs.	653 lbs.	5.35	20 Gal.
			387 kgs	296 kgs		75.7 L

Welbilt reserves the right to make changes to the design or specifications without prior notice.

Order ice machine and bin separately.

This product is hermetically sealed and contains fluorinated greenhouse gas R410A.

# **Shipping Weight:**

202 lbs (92 kg) Air-cooled:

**COMMERCIAL WARRANTY** 

#### **Accessories**

**Dispenser Bin** Thermostat Kit Reduces condensation when used with dispensers.



Top Air **Discharge Kit** Convert air flow to rear in-take / top exhaust.



Arctic Pure® Water Filters Reduces sediment and chlorine odors for better tasting ice.



**Bacteria Inhibitor** controls viruses and bacteria inside the ice



Manitwooc FSG Mexico S. de R.L. de C.V. Esfuerzo National No. 12 Int. M Colonia Alice Blanco Naucalpan de Juarez 53370 Estado de Mexico

