

PROJECT NAME: _____


LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____

Encore[®] Wall Mount Pot Sink Faucet with 12" (305mm) Straight Swing Spout and Lever Handles

KL34-8012-SE1

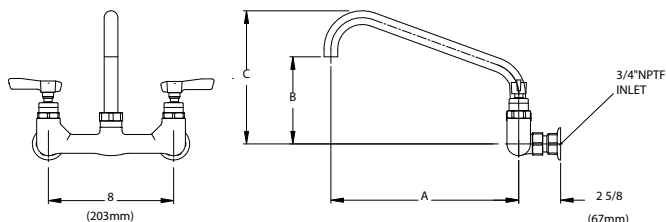

Dimensions shown in inches (mm) are for reference only
and are subject to change.

3/4" NPT Female Inlets

Operating Temperature: 40 - 180°F (5 - 83°C)

Operating Pressure: 20 - 125psi

Approximate shipping weight - 9 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality.

Commercial Quality Features

- 12" straight swing spout design
- Lever handle design
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- 1" diameter spout offers unrestricted water flow for quick filling of pots and kettles

SPECIFICATIONS:

Wall Mount Kettle Faucet to be Encore KL34-8012-SE1.

Faucet body to be constructed of polished chrome plated brass. Faucet to have 8" adjustable inlet centers. Handles to be lever style. Color coded temperature indexes shall meet international standards. Valves to be 1/4-turn with integral check valve to prevent cross-flow and back-flow. Spout to be 12" (305mm) straight swing style with leak proof double O-ring seal design and full flow Quik-Fil™ 1" dia. opening for flow rate of 54gpm @ 60psi.

Model No.	A	B	C
KL34-8012-SE1	12" (305mm)	5-5/8" (143mm)	8-1/2" (216mm)

COMPLIES WITH:
THE FEDERAL "REDUCTION OF LEAD
IN DRINKING WATER ACT" -
2011 - US SENATE BILL NO. S.3874
NSF/ANSI 61/9, ANNEX G

