



# BEVERAGE-AIR®

Project: \_\_\_\_\_  
Item: \_\_\_\_\_  
Location: \_\_\_\_\_  
Approved: \_\_\_\_\_

AIA#

SIS#

WTF27HC WORKTOP FREEZER

## SHALLOW DEPTH WORKTOP

WTF27HC Solid Door With Foamed-In Place Backsplash  
Hydrocarbon Series

MODEL:  
WTF27HC-FIP



**7 Year Parts/Labor Warranty**  
**7 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- Foamed-place backsplash
- Full electronic control
- Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Door opening includes low wattage, anti-condensate heaters
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door

### OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- Shelf clips
- Glass door option
- Right or left hinged door
- Locks (solid doors only)
- Bun rack
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option\* (see note on back on page)

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Freezers capable of maintaining product temperature of -10°F



  
Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com



# BEVERAGE-AIR®

## Worktop Freezer - Shallow Depth Model: WTF27HC-FIP


| MODEL                              | WTF27HC-FIP        |
|------------------------------------|--------------------|
| <b>EXTERNAL DIMENSIONAL DATA</b>   |                    |
| Width Overall                      | 27"                |
| Depth Overall with Handle & Bumper | 29 1/8"            |
| Height Overall with 6" Casters     | 39 5/8"            |
| Number of Doors                    | 1                  |
| Depth with Door Open 90°           | 53 1/8"            |
| Door Opening                       | 22 5/8" x 21 5/8"  |
| <b>INTERNAL DIMENSIONAL DATA</b>   |                    |
| NET Capacity (cubic ft.)           | 5.25               |
| Internal Width Overall (in)        | 23"                |
| Internal Depth Overall (in)        | 13 1/8"            |
| Internal Height Overall (in)       | 23"                |
| Number of Shelves                  | 2                  |
| <b>ELECTRICAL DATA</b>             |                    |
| Full Load Amperes                  | 2.5                |
| Voltage                            | 115/60/1           |
| Nema Plug (8' cord)                | 5-15P              |
| <b>REFRIGERATION DATA</b>          |                    |
| Horsepower                         | 1/4                |
| Capacity (BTU/Hr)                  | 857                |
| Heat Rejection (BTU/Hr)            | 1285.5             |
| Charge (lbs/grams/ounces)          | 0.0992 / 45 / 1.59 |
| <b>SHIPPING DATA</b>               |                    |
| Gross Weight - Crated              | 192 lbs            |
| Height - Crated                    | 43"                |
| Width - Crated                     | 30"                |
| Depth - Crated                     | 32"                |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.


We reserve the right to change specifications and product design without notice.  
Such revisions do not entitle the buyer to corresponding changes, improvements,  
additions or replacements for previously purchased equipment. Dimensional  
tolerances +/- 1/4". Metric dimensions (MM).

### Model Views


Required Clearance: 3" Bottom & 2" Rear

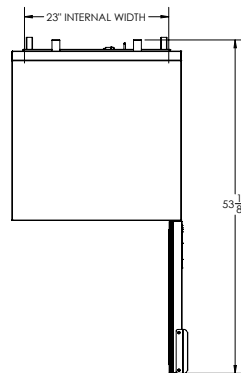

### PLAN VIEW

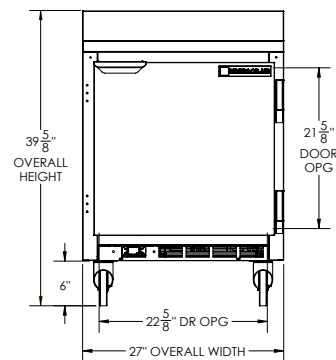

### ELEVATION VIEW



### SIDE VIEW

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

