

MONACO HOT MODEL # SCXMDH

SPECIFICATIONS

The Express Monaco Hot Euro Deli SCXMDH Series is a hot display case ideal for prepared foods. Available with a choice of standard grade plastic laminate exterior ends and with lift-up curved front tempered glass for easy cleaning and stocking.

Available lengths: ☐ 47 3/8" ☐ 71 3/8" ☐ 91 3/4"

Available depths: ☐ 43 7/8"

Available heights: ☐ 54 5/16"



STANDARD FEATURES

- Lift-Up Curved Front Tempered Glass
- Standard Grade Laminate Exterior
- Black Base
- Rear Work Ledge with Zip Lite Cutting Board
- Brushed Aluminum Interior Ends
- Top Canopy Light (T-8 Heat Resistant)
- Standard Pan Size Hot Well
4' - 3 Pans / 6' - 5 Pans / 8' - 6 Pans
with Common Drain Manifold
- Clear Plexi Rear Sliding Doors
- Stainless Steel Deck Pan
- Hardwire Direct
- ETL Listed in Accordance with UL 471
and NSF 4 Standards
- 1 Year Parts and Labor Warranty
- Floor Drain Required

OPTIONAL FEATURES

- ☐ Stainless Steel Exterior Finish
☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Unfinished)
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Miscellaneous Trim
- ☐ Brass Trim and Hardware
- ☐ Casters (Increases Height by 4")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)
- ☐ Mirrored Plexi Rear Sliding Doors
- ☐ Corian® Rear Work Ledge
- ☐ Zodiac® Rear Work Ledge
- ☐ Tempered Glass Vision End Panels
☐ 1/2 Glass End Panels
- ☐ Front Glass Locks
- ☐ Front Door Locks
- ☐ Top Warming Unit
- ☐ Food Warmer

NOTE: EXCEEDS STANDARD 36" DOOR OPENING FOR INSTALLATION ACCESS

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com


220 ROUTE 70, MEDFORD, NJ 08055




INDUSTRIES, INC. v8_31_17



MONACO HOT MODEL # SCXMDH

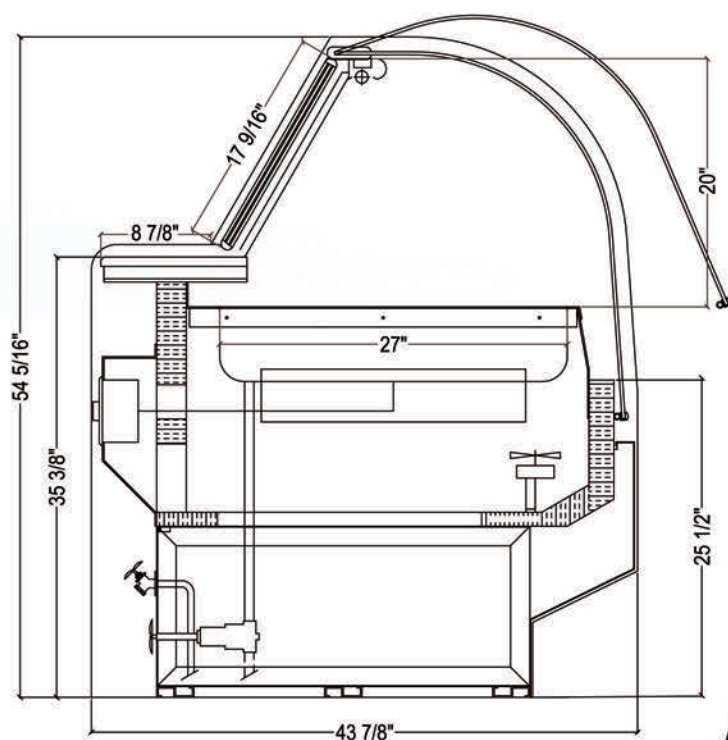

UNIT SHOWN WITH STANDARD SOLID END PANELS

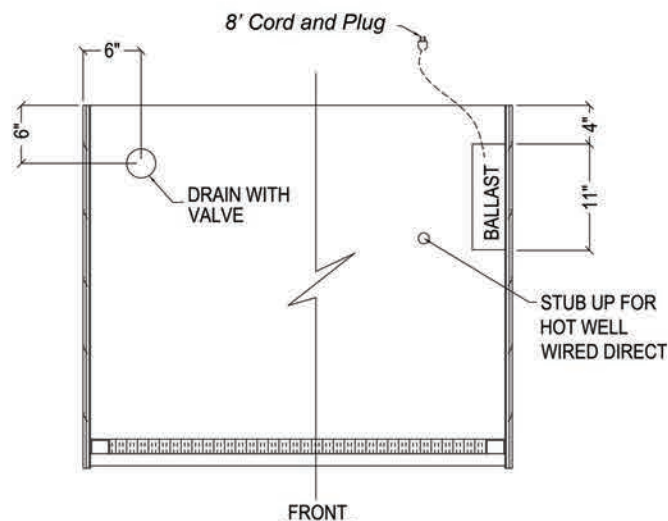

Electrical & Plumbing locations



Conforms to UL Standard 197,
 and NSF Standard 4; Certified
 To CSA Standard C22.2 No.109

MODEL	L	D	H	VOLT	AMP	PLUG	WT	WELLS
SCXMD48H	47 3/8	43 7/8	54 5/16	115-208/230	13	Hardwire	570	3
SCXMD72H	71 3/8	43 7/8	54 5/16	115-208/230	21.1	Hardwire	745	4
SCXMD96H	91 3/4	43 7/8	54 5/16	115-208/230	25.2	Hardwire	850	6

- Unit must be run to a floor drain at time of installation.
 - The SCXMDH merchandiser is designed for use in stores where temperature and humidity do not exceed 75 degrees F and 55% R.H. Locate away from direct sunlight and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioners may disrupt the performance of this case. Any adverse field conditions stated above will void warranty.
- RPI in line with it's current policy to continually improve it's product reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v8_31_17