

GARLAND®

G-Series 48" Gas Restaurant Range With Flame Failure & Electronic Ignition

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- GFE48-8LL
- GFE48-6G12LL
- GFE48-4G24LL
- GFE48-2G36LL



Model GFE48-8LL

Standard Features

- Flame failure protection: all burners
- Electric spark ignition on all burners, requiring single-phase 115V 60Hz or 240V 50Hz (specify)
- Large 27" (686mm) work top surface
- Stainless steel front and sides
- Stainless steel 5" (127mm) plate rail
- Stainless steel low-profile backguard
- 12" (305mm) section stamped drip trays w/ dimpled bottom
- 6" (152mm) adj. stainless steel legs
- Large, heavy-duty knobs
- Gas regulator
- Easy to access oven pilot
- Reinforced chassis

Standard on Applicable Models:

- Open storage in lieu of oven, (suffix S)
- Modular top (Suffix T) with stainless steel low profile backguard & 4" (102mm) adj. metal legs
- Ergonomic split cast-iron top ring grates
- 26,000 BTU/7.61 kW 2-piece cast-iron Starfire Pro® open top burner
- 5/8" (15mm) thick steel griddle plate w/ manual hi/lo valve control, 23" (584mm) working depth surface, standard on right, optional on left
- 4-1/4" (108mm) wide grease trough
- 18,000 BTU/5.27 kW cast-iron "H" style griddle burner per 12"(305mm) width of griddle
- 32,000 BTU/ 9.38 kW space-saver with

- cast-iron "H" style oven burner
- Snap-action modulating oven thermostat low to 500° F
- Nickel-plated oven rack and 3-position removable oven rack guide
- Large porcelain oven interior, fits standard sheet pans in both directions for standard ovens
- Square door design with strong, "keep-cool" oven door handle

Options & Accessories

- Manual hi/lo valve griddle control in lieu of thermostatic control
- Hot top 12" (305mm) plate in lieu of two open burners, manual valve controlled w/18,000 BTU/5.27 kW cast-iron "H" burner standard on left side
- Stainless steel backguard with removable high shelf
- Additional oven racks
- Four 6" (152mm) levelling swivel casters w/front locking
- Flanged deck mount legs
- Celsius temperature dials
- Piezo spark ignition for pilots on griddles

Specifications

Gas restaurant series range with 2 space-saver ovens, 20" (508mm) wide.

47-1/4" wide, 27" (686mm) deep work top surfaces.

Stainless steel front, sides and 5" wide front rail.

6" (152mm) legs with adjustable feet.

Total flame failure protection for all burners.

Electric spark ignition on all burners, requiring single-phase 115V 60Hz or 240V 50Hz (specify)

Eight Starfire Pro® 2-piece, 26,000 BTU/7.61 kW (natural gas), cast-iron open burners set in split cast-iron ergonomic grates.

Griddle or optional hot top with cast iron "H" style

burners, 18,000 BTU/5.27 kW (natural gas), in lieu of open burners.

Porcelain oven interior.

Heavy cast-iron "H" oven burner rated 32,000 BTU/ 9.38 kW (natural gas).

Oven controlled by even bake, fast recovery snap-action modulating oven thermostat.

NOTE: Use only Garland certified casters and approved restraining devices.




Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8082A
04/25



G-Series 48" Gas Restaurant Range /
Flame Failure & Electronic Ignition

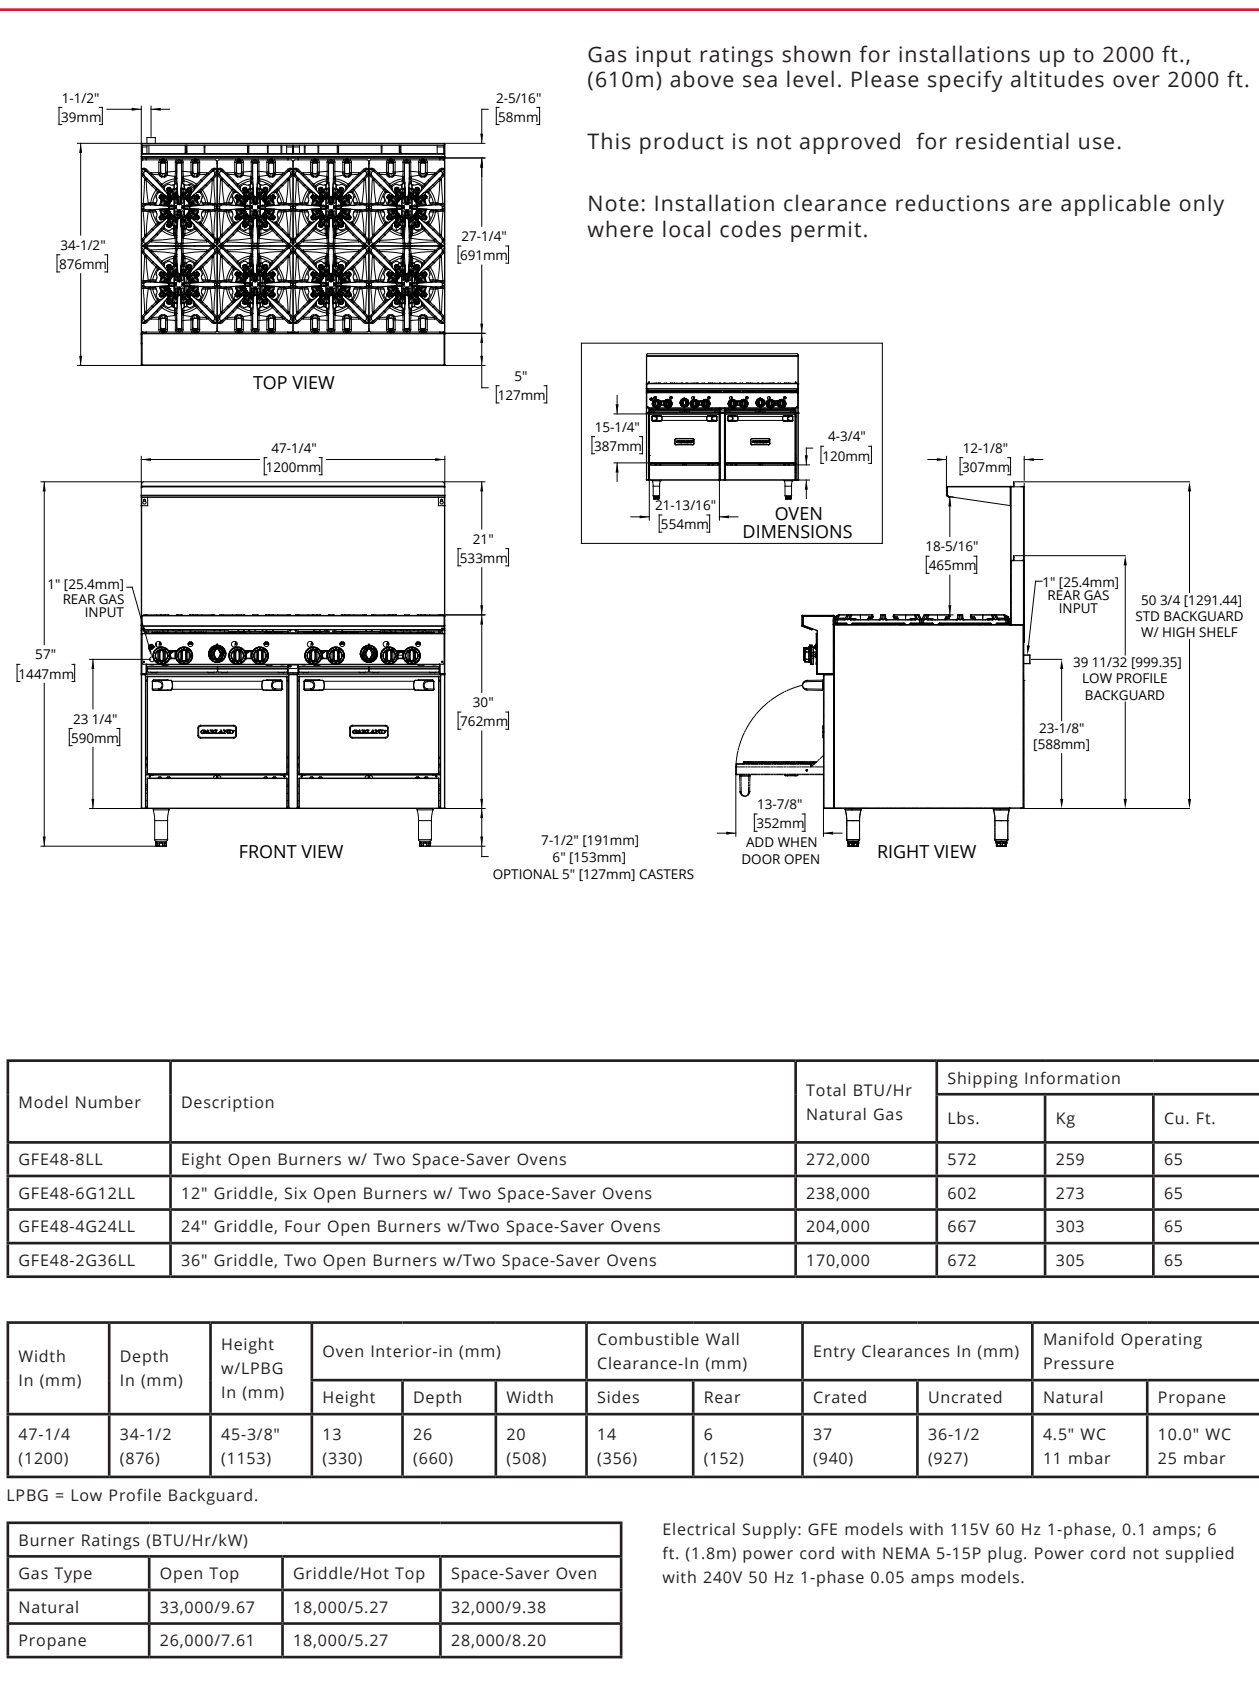

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8082A
04/25

