



LOW BOY REFRIGERATOR SELF-CONTAINED -LBD- SERIES


ITEM # _____

QTY. _____

PROJECT:

CONSULTANT:

33" DEEP UNITS

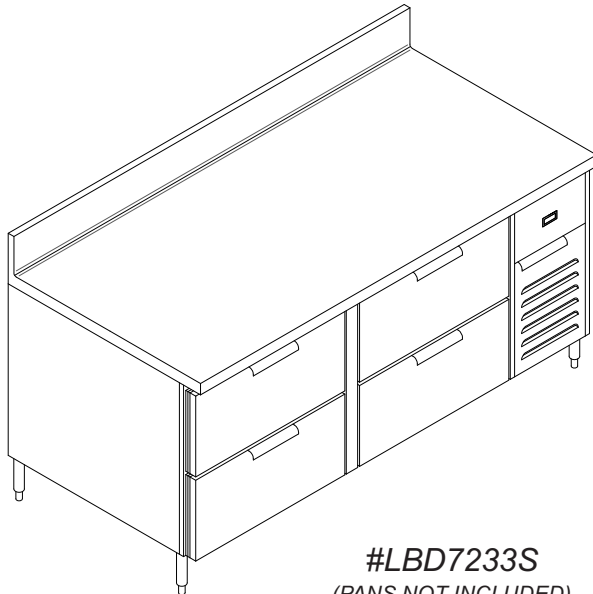

#LBD7233S
(PANS NOT INCLUDED)

CONSTRUCTION FEATURES

- **TOP** - ONE PIECE 14 GA. TYPE 300 STAINLESS STEEL WITH CHANNEL EDGE FRONT AND SIDES, TURN DOWN WITH 6" HIGH BACKSPLASH.
- **EXTERIOR REAR AND BOTTOM** - 20 GA. GALVANNEAL.
- **FRONT AND ENDS** - 20 GA. STAINLESS STEEL
- **INTERIOR** - MANUFACTURED WITH COVED CORNER CONSTRUCTION USING ALL TYPE 300 STAINLESS STEEL. ALL UNITS FULLY INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE.
- **DRAWERS** - 20 GA. STAINLESS STEEL WITH STAINLESS STEEL INTERIOR AND INSULATED WITH HIGH DENSITY **FOAMED-IN-PLACE** POLYURETHANE. DRAWERS USE REMOVABLE SNAP-IN GASKETS FOR EASY CLEANING AND REPLACEMENT.
- **REFRIGERATION SYSTEM** - ALL REFRIGERATORS USE R-448A REFRIGERANT. COMPRESSOR WITH HOT GAS CONDENSATE EVAPORATOR IS MOUNTED AT RIGHT END. BLOWER IS INSTALLED WITH EXPANSION VALVE. THERMOSTAT IS MOUNTED IN APRON. REFRIGERATOR MAINTAINS A TEMPERATURE IN COMPLIANCE WITH NSF.
- **LEGS** - 2" DIAMETER HEAVY DUTY ADJUSTABLE (6"-8") STAINLESS STEEL.
- **ELECTRICAL CONNECTION** - 115 VOLTS, 60 CYCLE, SINGLE PHASE. ALL UNITS PROVIDED WITH 6'-0" CORD AND PLUG-NEMA 5-15P.

OPTIONS AND ACCESSORIES

- | | | |
|--|---|---|
| ☐ 180° ROLLED EDGE | ☐ 5" DIAMETER POLY CASTERS | ☐ 208 VOLT SINGLE PHASE |
| ☐ BULLNOSE EDGE | ☐ PLASTIC LAMINATE FRONT | ☐ 208 VOLT THREE PHASE |
| ☐ INVERTED "V" EDGE | ☐ PLASTIC LAMINATE LEFT END | ☐ 50 CYCLE FOR SPECIAL APPLICATION |
| ☐ RAISED ROLLED EDGE | ☐ PLASTIC LAMINATE RIGHT END | ☐ SPECIAL BODY HEIGHT |
| ☐ RAISED CHANNEL EDGE | ☐ PLASTIC LAMINATE REAR | ☐ CYLINDER LOCKS |
| ☐ SPECIAL HEIGHT SPLASH: _____ | ☐ DIAL THERMOMETER | ☐ FLANGED FEET |
| ☐ LEFT END RETURN SPLASH | ☐ FULL LENGTH RECESSED HANDLES | ☐ S/S KICK PLATES |
| ☐ RIGHT END RETURN SPLASH | ☐ COATED BLOWER COIL | ☐ S/S CHANNEL |
| ☐ 1/2" THICK POLY CUTTING BOARD | ☐ 6" DEEP SINK OVER COMP. HOUSING | ☐ OMIT BACKSPLASH (TURN-DOWN EDGE) |
| ☐ 1/2" THICK RICHLITE CUTTING BOARD | ☐ 12 X 20 HOT FOOD WELL OVER COMP. HOUSING | ☐ OTHER: _____ |
| ☐ STAINLESS STEEL BACK | ☐ FISH FILES (CONSULT FACTORY) | |
| ☐ LEFT SIDE MECHANICAL COMP. | | |

NOTE: OTHER OPTIONS AND ACCESSORIES AVAILABLE. PLEASE SEE ACCESSORY PAGE AT THE END OF THIS SECTION.



EMI Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-41**



LOW BOY REFRIGERATOR SELF-CONTAINED -LBD- SERIES


ITEM # _____

QTY. _____


PROJECT:

CONSULTANT:


33" DEEP UNITS




LBD4333S




LBD4833S




LBD7233S

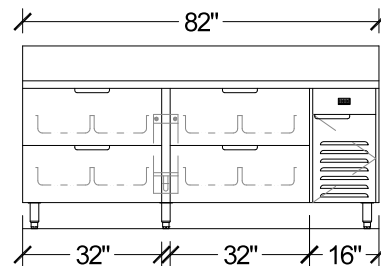

LBD8233S

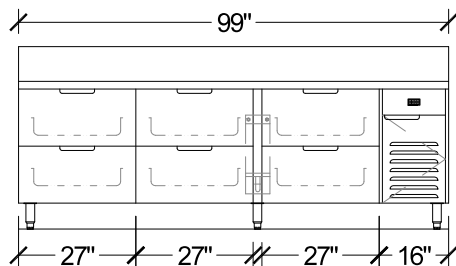

LBD9933S

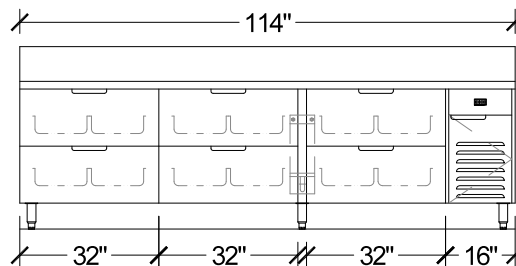

LBD11433S



SPECIFICATION DATA

MODEL	DRAWERS	12 x 20 PAN, DRAWER CAPACITY	COMP. HP	VOLTAGE	AMPS	CRATED WEIGHT
LBD4333S	2 - 27"	4	1/4	115/60/1	4.0	280
LBD4833S	2 - 32"	4	1/4	115/60/1	4.0	310
LBD7233S	4 - 27"	8	1/4	115/60/1	4.8	460
LBD8233S	4 - 32"	8	1/3	115/60/1	6.2	510
LBD9933S	6 - 27"	12	1/3	115/60/1	6.2	565
LBD11433S	6 - 32"	12	1/3	115/60/1	6.2	620

MECHANICAL DATA

LEGEND

- C** CONDENSING UNIT WIRED TO
JUNCTION BOX/HARNESS
- JB** JUNCTION BOX/HARNESS WITH 6'-0"
CORD AND PLUG (NEMA 5-15P)



SECTION VIEW



EMI Is the Leader in "PRE-ENGINEERED" Custom Fabrication

301 Division Street Boonton, NJ 07005
PHONE: (973) 423-0226 FAX: (973) 423-1638
TOLL FREE: (800) 322-9925

WEBSITE: www.emiindustries.com

EMI is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.

**PAGE
A-42**