




Your Solutions Partner

Specifications

F.O.B. Sedalia, Missouri 65301

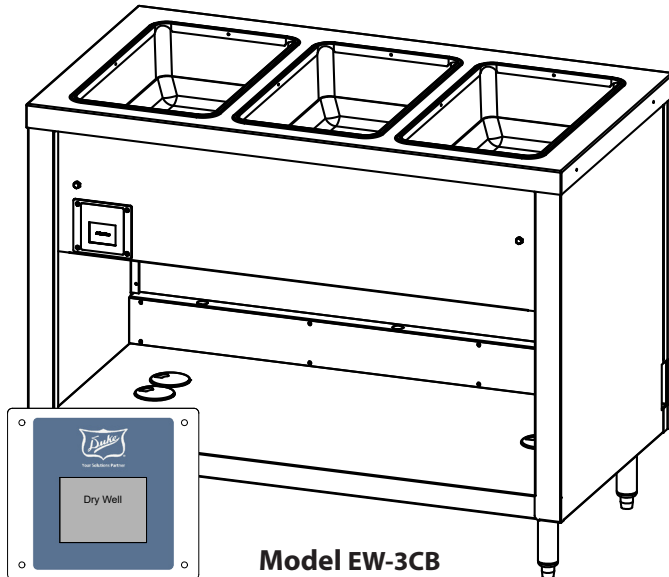

Model EW-3CB

OPTIONS:

- ☐ 14 gauge tops
- ☐ Backsplash
- ☐ Recessed top (to accommodate griddles, fryers, etc.)
- ☐ Adaptor plates
- ☐ 3-phase wiring
- ☐ Optional outlet for overhead LED lights
- ☐ 6', 8' or 10' Cord and plug
- ☐ Heated base module
- ☐ Electric outlet in base
- ☐ Sliding Doors
- ☐ Pass-thru construction
- ☐ Veneered plastic laminate panels on body
- ☐ Powder coat paint in 12 colors
- ☐ Casters (add cord and plug), 5" swivel with locks
- ☐ Food shields
- ☐ Tray slides
- ☐ Work shelves
- ☐ Customer side Kickplates - Stainless steel or Painted
- ☐ 34" ADA height (units finish at 33.5"). Adjustable height casters with 5/8" adjustability allow leveling to 34"

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Thurmaduke® Ganged Waterless Well Hot Food Units - Standard

- ☐ EW-2CBPG/EW-2CBSS 2 top openings
- ☐ EW-3CBPG/EW-3CBSS 3 top openings
- ☐ EW-4CBPG/EW-4CBSS 4 top openings
- ☐ EW-5CBPG/EW-5CBSS 5 top openings
- ☐ EW-6CBPG/EW-6CBSS 6 top openings

TOP:

- 16 gauge, 300 Series stainless steel
- Top openings die-stamped. 11 7/8" x 19 7/8"

Heat Compartments:

- 6 1/2" deep wells Dry operation only
- Includes Silicone bottom pad
- Fully Insulated wells
- Rope Element in each compartment
- ☐ 120, 208 or 240 volt A/C
- Single Phase standard

BODY AND INTERIOR SHELF:

- ☐ Stainless Steel body
- ☐ Painted body w/ choice of 12 powder coat colors
 - Full bottom shelf to match body
 - Stainless Steel Front Panel w/ Control screen
 - 6" polished stainless steel adjustable legs

CONTROLS:

- Standard intuitive, easy to use touch screen control
 - One control for all wells
- Easily adjusted presets LOW/MED/HIGH
- Built in WIFI and Bluetooth for future connectivity

Certifications



Specification subject to change



WARNING For CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free

314.231.5074 Fax


www.dukemfg.com

SS-1256 Ganged Waterless Well - Stand Thurmaduke

REV D 09/19/2025



Ganged Waterless Well Standard Counter

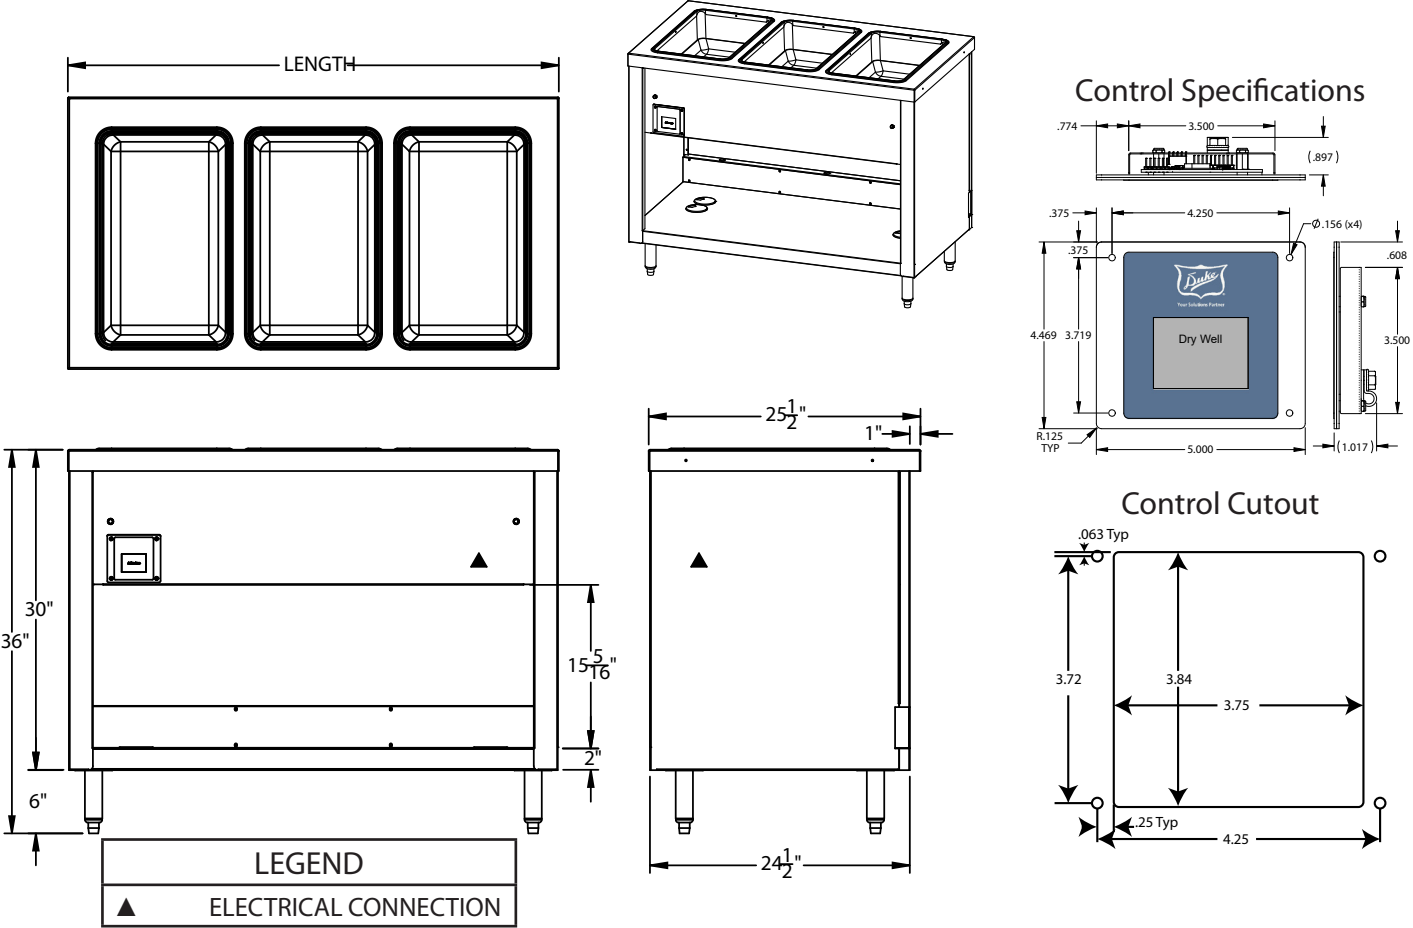

DIMENSIONS:								FREIGHT CLASS: 150			
Model		Length		Depth		Height		Top Openings	Cube ft. Crated	Weight	
Enameled	Stainless	in	cm	in	cm	in	cm			lbs	kg
EW-2-CBPG	EW-2-CBSS	32	81.3	25-1/2	64.8	36	91.4	2	28.1	210	95.5
EW-3-CBPG	EW-3-CBSS	46	116.8	25-1/2	64.8	36	91.4	3	39.6	264	120.0
EW-4-CBPG	EW-4-CBSS	60	152.4	25-1/2	64.8	36	91.4	4	51.2	344	156.4
EW-5-CBPG	EW-5-CBSS	74	188.0	25-1/2	64.8	36	91.4	5	62.3	433	196.8
EW-6-CBPG	EW-6-CBSS	88	223.5	25-1/2	64.8	36	91.4	6	74.3	527	239.6

ELECTRICAL SPECIFICATIONS:				Cord & NEMA plug NOT included						
Model	120V 665W			208V 500W			240V 665W			
	Watt	Amps	NEMA	Watt	Amps	NEMA	Watt	Amps	NEMA	
EW-2-CBPG/SS	1414	11.8	5-15	1084	5.2	6-20	1414	5.9	6-20	
EW-3-CBPG/SS	2083	17.4	L5-30	1588	7.6	6-20	2083	8.0	6-20	
EW-4-CBPG/SS	2748	22.9	L5-30	2088	10	6-20	2748	11.5	6-20	
EW-5-CBPG/SS	3417	28.5	5-50	2592	12.5	6-20	3417	14.2	6-20	
EW-6-CBPG/SS	N/A			3092	14.9	6-20	4082	17.0	L6-30	



Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com