

Cuisine Series Infra-Red Salamander Broiler

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- CIR36
- CIR36C



Model CIR36C with legs



Model CIR36 Range Mount on a C36-6R

Standard Features

- Range mount models
 - stainless steel top front, sides, backsplash, and bottom w/heat shield
- Counter mount CIR36C
 - stainless steel top, front, and sides
 - C/W 4" (102mm) legs
- 1/2" NPT top gas inlet
- Two (2) 20,000 BTU (5.86 kW) atmospheric infrared burners
- Two (2) individual Hi-Lo valve controls
- Three (3) position springbalanced, adjustable rack assembly
- Large capacity removable grease pan
- Gas pressure regulator
- One year limited parts & labor warranty (USA & Canada only)

Options & Accessories





- Wall-mounting kit and stainless steel main bottom w/heat shield for model CIR36C
- Rear gas inlet (standard on counter model CIR36C)
- Interconnecting gas piping for range-mount, models CIR36
- Stainless steel back

Specifications

Garland Cuisine Series mount gas infra-red salamander broiler Model CIR____. Available to mount over Garland Cuisine Series restaurant ranges 36" - 60" (900mm-1500mm) wide also CIR36 model can be ordered to mount Cuisine Series Heavy Duty gas ranges. Two (2) 20,000 BTU (5.86 kW) atmospheric infra-red burners. Three (3) position adjustable rack. Stainless steel top, front, sides, backsplash, and bottom w/heat shield. 40,000 BTU (11.72 kW) total (NG). Natural or propane gas. Certified to Canadian and US Standards, listed by NSF.



Cuisine Series Infra-Red Salamander Broiler

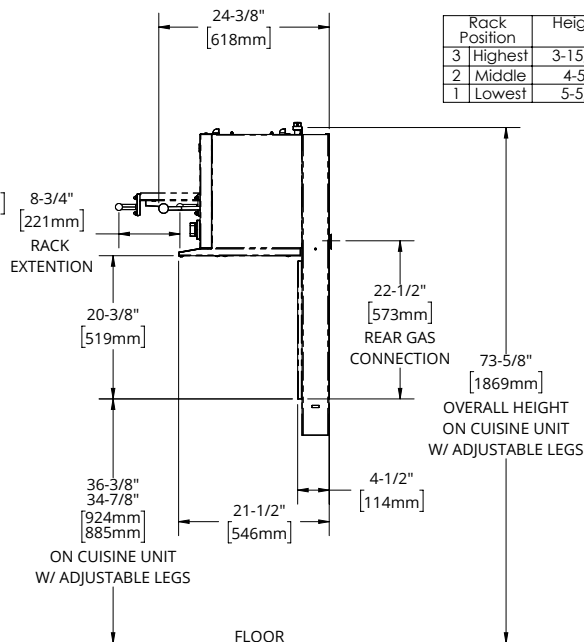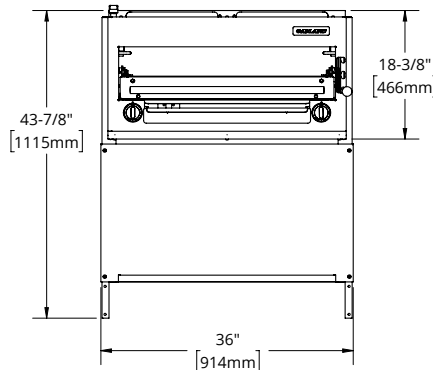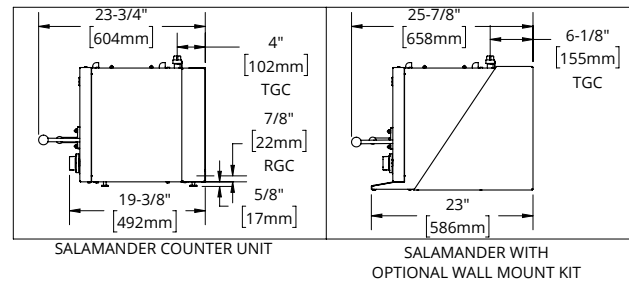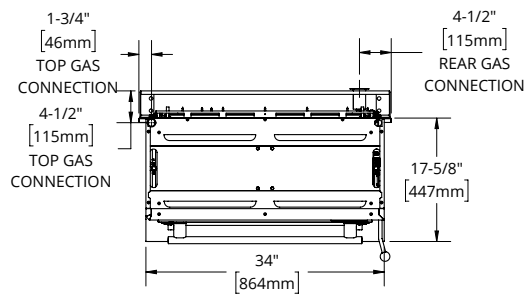

Rack Position	Height of Rack to Burner
3 Highest	3-15/16" (143mm)
2 Middle	4-5/8" (117mm)
1 Lowest	5-5/8" (143mm)

Model #	Width	Use With Cuisine Series Model	Shipping		Entry Clearances: In (mm)	
			Cu Ft	lbs/kg	Crated	Uncrated
CIR36	34" (864mm)	N/A	21	170/77	29 (737)	21 (533)
CIR36C	35-1/2" (900mm)**	C36	40	200/91	29 (737)	21 (533)

* Note Salamander Broiler on Left Side. Right Side Optional.

**Note CIR36 on Cuisine series ranges is 36" (914mm)

Rack Position	Opening Height to Cook Surface (A)
3 Highest	2-3/4" (70mm)
2 Middle	3-1/2" (87mm)
1 Lowest	4-3/8" (111mm)

Operating Pressure		Combustible Wall Clearance		Total Input	
NAT.	PRO.	Sides	Back	NAT.	PRO.
6"WC (15mbar)	10"WC (25mbar)	6" (152mm)	6" (152mm)	40,000 BTU/h (11.7Kw)	32,000 BTU/h (9.4kW)

Gas input ratings shown for installations up to 2000 ft., (610m), above sea level.

Please specify altitudes over 2000 ft.

Please specify gas type when ordering.

Garland reserves the right to make changes to the design or specifications without prior notice.