

VISTA

REFRIGERATED | PASTRY | DESSERTS | PREPARED FOODS



Project: _____ Item #: _____
Location: _____ Approved: _____

631-981-2100

Display Case

Standard Features:

- Three glass shelves and stainless steel deck
- LED lighting on each shelf
- Double pane glass
- Self-contained - with condensation pan (no floor drain required)
- Temperature control panel
- White exterior, RAL 9003
- Adjustable equipment legs
- Sealed to the ground kick plates
- Straight glass (VD)
- Front glass opens for easy cleaning access
- Cord & Plug (6ft cord)
- Rear sliding doors, hinged doors for 24" and 33.75" cases



Optional Accessories:

- Castor Kit (add 3" to height)
- Curved glass (VC)
- Channel Kit (to seam two separate cases together without side panels)
- Paint exterior panels, customer choice of RAL color
- 90° corner case, (must be channeled to another case only available in straight glass)




VISTA


REFRIGERATED DISPLAY CASE




Top View

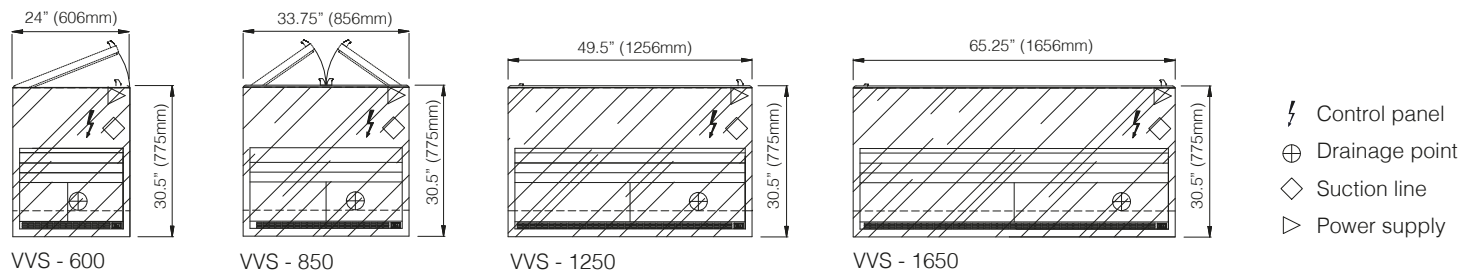

Side View

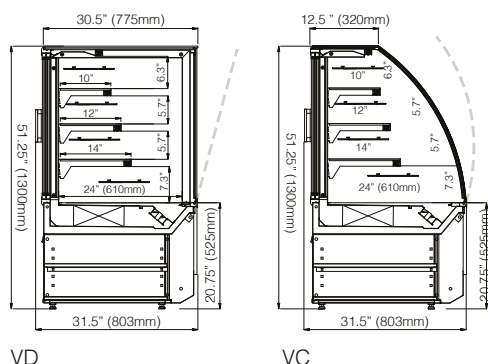


Rear View

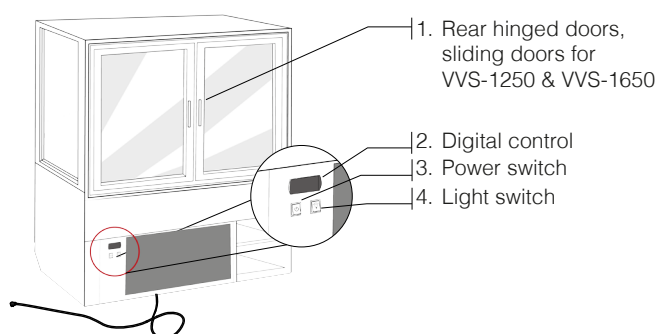

Technical Specifications & Electrical Requirements

Glass Style	Model #	Dimensions W x D x H (In.)	Net Wt. (Lbs.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
Straight Glass (VD)	VVS-600 VD	24" x 31.25" x 51.25"	395	7	1/2	6-15P	3.11
	VVS-850 VD	33.75" x 31.25" x 51.25"	468	8	1/2	6-15P	4.41
	VVS-1250 VD	49.5" x 31.25" x 51.25"	611	10	1	6-15P	6.46
	VVS-1650 VD	65.25" x 31.25" x 51.25"	732	11	1 1/4	6-15P	8.55
Curved Glass (VC)	VVS-600 VC	24" x 31.25" x 51.25"	395	7	1/2	6-15P	3.11
	VVS-850 VC	33.75" x 31.25" x 51.25"	468	9	1/2	6-15P	4.41
	VVS-1250 VC	49.5" x 31.25" x 51.25"	611	10	1	6-15P	6.46
	VVS-1650 VC	65.25" x 31.25" x 51.25"	732	11	1 1/4	6-15P	8.55



Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.


All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.

VISTA


REFRIGERATED DISPLAY CASE



Top View




VVS-CER90E VD




VVS-CER90D VD

- ⚡ Control panel
- ⊕ Drainage point
- ◇ Suction line
- ▷ Power supply

Rear View




VVS-CER90E VD




VVS-CER90D VD

Side View





3D View

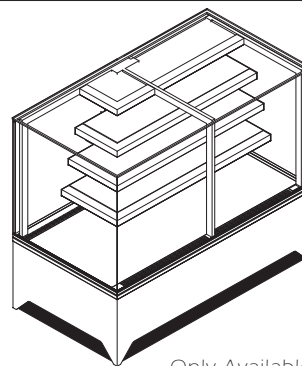

Only Available in Straight Glass.

Technical Specifications & Electrical Requirements

Glass Style	Model #	Dimensions W x D x H (In.)	Net Wt. (Lbs.)	Amps.	HP	Nema Plug	Capacity (Cu. Ft.)
90° Corner (VD)	VVS-CER90D VD	56" x 31.25" x 51.25"	750	10	5/8	6-15P	6.46
	VVS-CER90E VD	56" x 31.25" x 51.25"	750	10	5/8	6-15P	6.46



Important Notes: Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty. Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption. Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.). Tile floors, low ceilings, or small rooms will increase noise level. Compressor air lower front intake. Front panel cannot be blocked.

All technical data, pictures and drawings contained in this document are not binding on the manufacturer, nor can the manufacturer be held liable for any modification of the machine, in part or in whole.