



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.encoreplumbing.com • www.componenthardware.com

Encore® 4" (102mm) Wall Mount Faucet with 18" Double Jointed Tubular Swing Spout and Lever Handles

KL45-4018



1/2" NPSM Male Inlets
Operating Temperature: 40-180°F (5-83°C)
Operating Pressure: 15-125psi
Note: 1-1/8" (29mm) holes for backsplash are
recommended to accommodate 1/2" supply nipples

Approximate shipping weight - 5 lbs
Warranty - 2 years parts

PROJECT NAME: _____
LOCATION: _____
SPECIFIER ITEM NO. _____ **QTY:** _____
ENCORE PART NO. _____

Solid heavy duty cast body is specification and commercial
quality for hand sinks.


Commercial Quality Features

- 18" double jointed tubular swing spout design
- Lever handles
- Built-in check valves to prevent cross-flow and back-flow
- Leak proof double O-ring spout design
- Stainless steel spout

SPECIFICATIONS:

Wall Mount Faucet to be Encore KL45-4018.

Faucet body to be constructed of polished chrome plated brass with total
lead content less than 0.25% by weighted average. Supply inlets to be 4" on
center. Valves to be 1/4-turn with integral check valve to prevent cross-flow
and back-flow. Spout to be 18" double jointed stainless steel tubular swing
style with leak proof double O-ring seal design. Color coded temperature
indexes shall meet international standards. 2.2gpm aerator @ 60psi
standard with full flow stream bubbler screen spout tip.

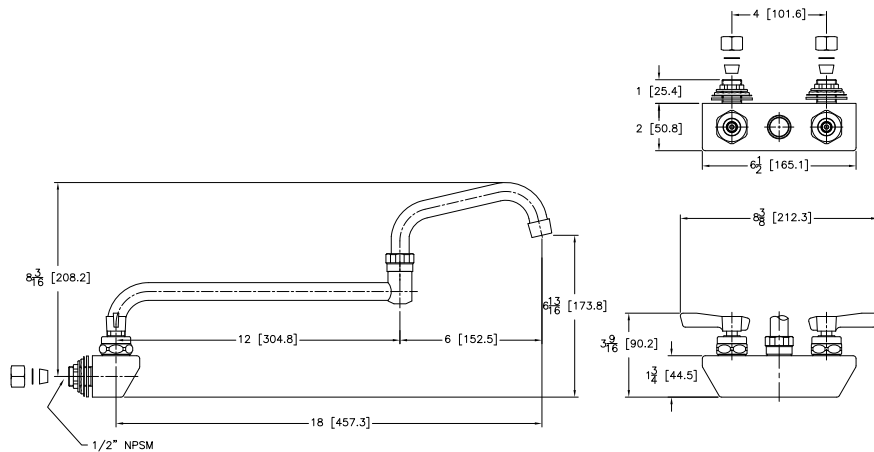

Dimensions shown in inches (mm) are for reference only
and are subject to change.

