



**AVENUE H-PIPE TOWERS**  
*Century System*



COMPONENT



4072-8PO-SS

|           |
|-----------|
| JOB       |
| AREA      |
| ITEM NO.  |
| MODEL NO. |

| Models       |
|--------------|
| 4072-6PO-SS  |
| 4072-8PO-SS  |
| 4072-10PO-SS |
| 4072-12PO-SS |
| 4072-14PO-SS |
| 4072-16PO-SS |

The modern, clean design of **Avenue Tower** makes it a great fit for any bar. Engineered for durability, the stainless-steel design will last for years. Perlick's superior heat exchanger and insulation guarantee a perfect pour.

**KEY PRODUCT FEATURES AND BENEFITS**

- The simple, clean lines of the **Avenue Tower** offer a design that easily adapts to any space
- Pure copper coolant lines and cold block maintain chilled beverage temperature, minimizing foam and lost profits
- Insulated dispensing head and shank bushings minimize sweating to keep your bar clean, cool more efficiently for energy reduction, and reduce warm spots in the tower to give you the perfect pour
- Tight seams and hidden fasteners offer a seamless and sophisticated design and make the tower easier to clean
- 304 Stainless steel shanks ensure purity of flavor from keg to tap

**Quick Features:**

- Avenue H-Pipe is available in even number faucet configurations between 6 and 16
- Additional faucet configurations available with the T-Pipe, making the Avenue family compatible with a wide range of bar layouts
- Mounting hardware is concealed below the bar top, creating a more sanitary dispensing solution
- NSF listed
- All towers come standard with Perlick's 630 series forward sealing faucets in 304 stainless steel
- Optional accessory: Beer faucet lock (308-40C) for 630 series faucets


Form No. Z2574  
 Rev. 06.24.24

**Perlick® AVENUE H-PIPE TOWERS**  
*Century System*

MODEL NUMBERS - 4072-6PO-SS, 4072-8PO-SS, 4072-10PO-SS, 4072-12PO-SS, 4072-14PO-SS, 4072-16PO-SS

| MODEL NUMBERS                      |                           | 4072-6PO-SS   | 4072-8PO-SS   | 4072-10PO-SS  | 4072-12PO-SS   | 4072-14PO-SS   | 4072-16PO-SS   |
|------------------------------------|---------------------------|---------------|---------------|---------------|----------------|----------------|----------------|
| NUMBER OF FAUCETS                  |                           | 6             | 8             | 10            | 12             | 14             | 16             |
| "A" DIMENSION LENGTH (MM)          |                           | 24-7/8" (632) | 30-7/8" (784) | 36-7/8" (937) | 42-7/8" (1089) | 48-7/8" (1241) | 54-7/8" (1394) |
| "B" DIMENSION, FAUCET CENTERS (MM) |                           | 3" (76)       | 3" (76)       | 3" (76)       | 3" (76)        | 3" (76)        | 3" (76)        |
| SHIPPING WEIGHT, LBS. (KG)         |                           | 28 (12)       | 30 (13)       | 32 (14)       | 35 (15)        | 37 (16)        | 37 (16)        |
| OPTIONAL DRIP PAN                  | TOP MOUNT - 5000 SERIES   | 5025          | 5028          | 5030          | 5030           | 5034           | 5036           |
|                                    | TOP MOUNT - C18000 SERIES | C18645A       | C18650A       | C18655        | C18658         | C18660         | C18663         |
|                                    | RECESSED                  | C32357        | 58979         | 58979         | 58979          | 69324          | 69327          |

Perlick reserves the right to change specifications without notice.

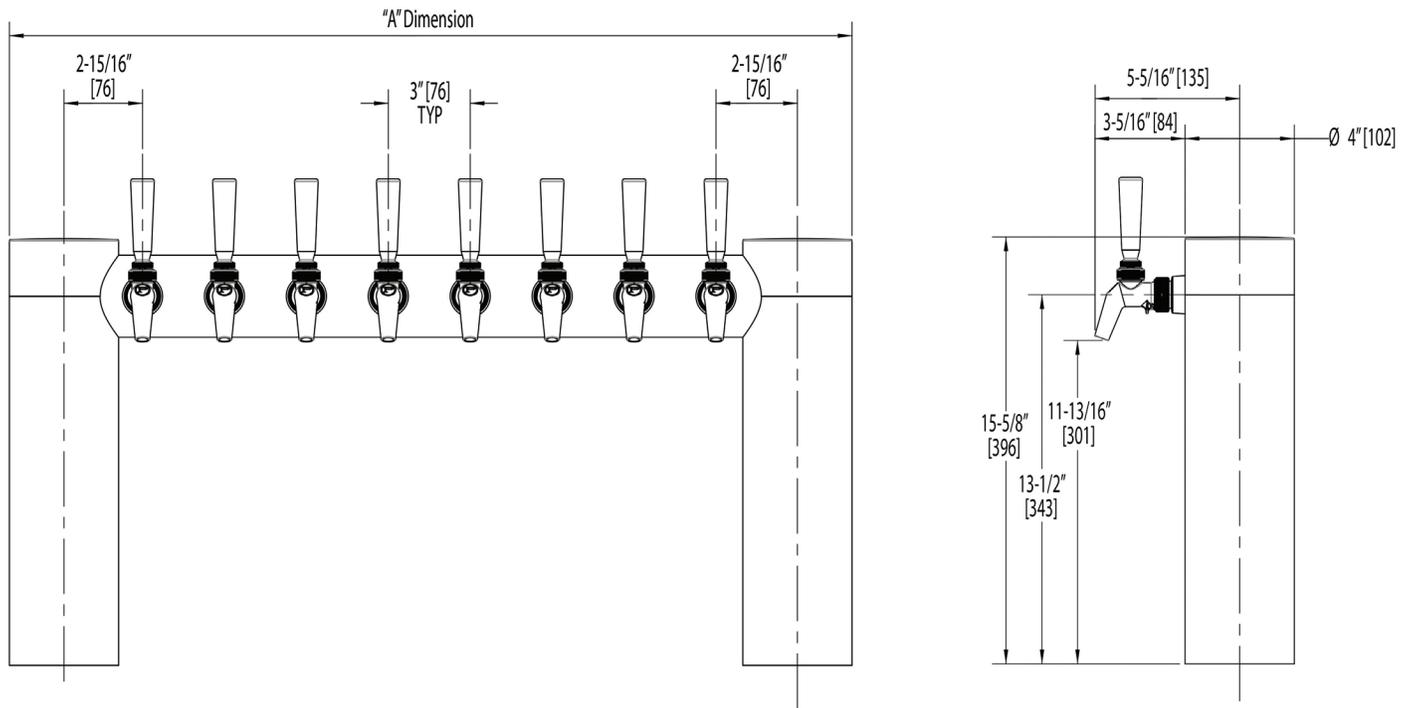

**4072-8PO**