

"ST6R1.5-SSW" STAINLESS STEEL TOP WORK TABLES

16GA Top w/1.5" Riser - Stainless Steel Legs & Fixed Undershelf

FEATURES:

- 16GA Stainless Steel Top
- Type 300 Stainless Steel With #4 Polish, Satin Finish
- Top Is Sound Deadened
- Reinforced With 1"x2" Channel Running Length Of Table
- 1-1/2" Stallion Edge On Front And 1-1/2" Backsplash On Rear With Side Edges 90 Degree Bend Down For Table Line-Up
- Stainless Steel Base With Fixed Undershelf
- Adjustable Bullet Feet
- Ships Welded

SPECIFICATIONS:

- Top: Stainless Steel Tops Are TIG Welded, Exposed Welds Are Polished To Match Adjacent Surface
- Top: 16GA, Type 300 Stainless Steel With #4 Polish, Satin Finish
- Shelf: 18GA Stainless Steel, (36" Wide Tables, 16 GA Lower Shelf)
- Legs: 1-5/8" Round O.D. , 16GA Tubular Stainless Steel
- Gussets: Stainless Steel
- Feet: 1" Adjustable Stainless Steel Bullet Feet



ST6R1.5-3048SSW

CERTIFICATIONS:



ACCESSORIES

DESCRIPTION

Drawer

Drawer Lock

Casters

Overshelves

Sinks


Pot Rack

"ST6R1.5-SSW" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST6R1.5-2424SSW	42	1000	ST6R1.5-3024SSW	47	1000	ST6R1.5-3624SSW	56	1000
30"	ST6R1.5-2430SSW	47	1000	ST6R1.5-3030SSW	53	1000	ST6R1.5-3630SSW	66	1000
36"	ST6R1.5-2436SSW	53	1000	ST6R1.5-3036SSW	60	1000	ST6R1.5-3636SSW	73	1000
48"	ST6R1.5-2448SSW	65	1000	ST6R1.5-3048SSW	74	1000	ST6R1.5-3648SSW	90	1000
60"	ST6R1.5-2460SSW	76	680	ST6R1.5-3060SSW	88	680	ST6R1.5-3660SSW	107	680
72"	ST6R1.5-2472SSW	88	440	ST6R1.5-3072SSW	101	440	ST6R1.5-3672SSW	126	440
84"	ST6R1.5-2484SSW	107	1500	ST6R1.5-3084SSW	123	1500	ST6R1.5-3684SSW	152	1500
96"	ST6R1.5-2496SSW	118	1500	ST6R1.5-3096SSW	136	1500	ST6R1.5-3696SSW	170	1500
108"	ST6R1.5-24108SSW	130	1500	ST6R1.5-30108SSW	149	1500	ST6R1.5-36108SSW	187	1500
120"	ST6R1.5-24120SSW	140	1250	ST6R1.5-30120SSW	163	1250	ST6R1.5-36120SSW	204	1250
132"	ST6R1.5-24132SSW	152	1000	ST6R1.5-30132SSW	177	1000	ST6R1.5-36132SSW	221	1000
144"	ST6R1.5-24144SSW	164	750	ST6R1.5-30144SSW	191	750	ST6R1.5-36144SSW	238	750

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

DETAILED SPECIFICATIONS

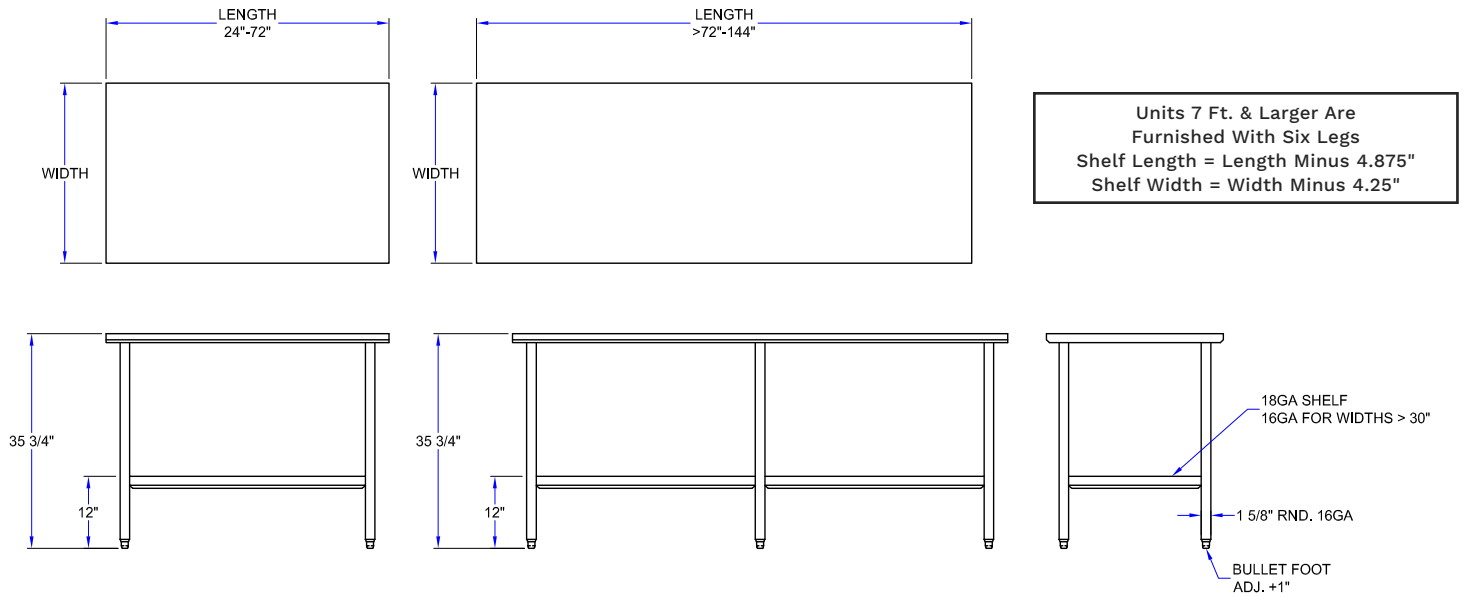

MODEL # STRUCTURE

1.5 = Ht. Of Riser w/Turndown

R = Top w/Riser

6 = 16GA Work Surface

ST = Stainless Steel Top



ST6R1.5-2430SSW

"ST6R1.5-SSW" STAINLESS STEEL TOP WORK TABLES

LENGTH	24" WIDE	WT	WT CAP	30" WIDE	WT	WT CAP	36" WIDE	WT	WT CAP
24"	ST6R1.5-2424SSW	42	1000	ST6R1.5-3024SSW	47	1000	ST6R1.5-3624SSW	56	1000
30"	ST6R1.5-2430SSW	47	1000	ST6R1.5-3030SSW	53	1000	ST6R1.5-3630SSW	66	1000
36"	ST6R1.5-2436SSW	53	1000	ST6R1.5-3036SSW	60	1000	ST6R1.5-3636SSW	73	1000
48"	ST6R1.5-2448SSW	65	1000	ST6R1.5-3048SSW	74	1000	ST6R1.5-3648SSW	90	1000
60"	ST6R1.5-2460SSW	76	680	ST6R1.5-3060SSW	88	680	ST6R1.5-3660SSW	107	680
72"	ST6R1.5-2472SSW	88	440	ST6R1.5-3072SSW	101	440	ST6R1.5-3672SSW	126	440
84"	ST6R1.5-2484SSW	107	1500	ST6R1.5-3084SSW	123	1500	ST6R1.5-3684SSW	152	1500
96"	ST6R1.5-2496SSW	118	1500	ST6R1.5-3096SSW	136	1500	ST6R1.5-3696SSW	170	1500
108"	ST6R1.5-24108SSW	130	1500	ST6R1.5-30108SSW	149	1500	ST6R1.5-36108SSW	187	1500
120"	ST6R1.5-24120SSW	140	1250	ST6R1.5-30120SSW	163	1250	ST6R1.5-36120SSW	204	1250
132"	ST6R1.5-24132SSW	152	1000	ST6R1.5-30132SSW	177	1000	ST6R1.5-36132SSW	221	1000
144"	ST6R1.5-24144SSW	164	750	ST6R1.5-30144SSW	191	750	ST6R1.5-36144SSW	238	750

OVERALL WEIGHT (WT) AND MAX WEIGHT CAPACITY (WT CAP) ARE IN POUNDS (LBS). MAX WEIGHT CAPACITY EVENLY DISTRIBUTED.
ALL DIMENSIONS ARE TYPICAL. TOLERANCE +/- .500". JOHN BOOS & CO. RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.