



Discover the Art of Display...



Photo shown with remote application and custom front fascia options



Photo shown with self-contained bottom mount and custom front fascia options

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)



Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## MURO H11-1 & MURO H11-2 Self-Serve Air Screen Refrigeration Showcase

**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X

**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

### STANDARD FEATURES

- Muro H11-1 – (1) shelf
- Muro H11-2 – (2) shelves
- Double pane side glass ends with grey serigraphy
- Dixell digital control
- Diffused LED lighting 3000°K
- Straight or inclined shelf/shelves
- Polished stainless steel interior and exterior
- Self-Contained – Floor Sink Recommended
- Adjustable feet
- Cases ship standard stainless steel interior and exterior
- Roll down night curtain
- Self contained bottom mount (BM) – 28”  
Deep (standard) or rear mount- RM – 41” deep (optional)
- Muro H11-1-A90X and Muro H11-2-A90X models:  
available standard remote condensing unit only

### OPTIONS

- Stainless steel side panels in lieu of glass
- Remote/water cooled condensing unit
- Remote condensing unit with back shelving: 30 7/16” total depth
- Self contained rear mount- RM – 41” deep w/ back shelving
- Roll down night shutter with lock – length increases and solid sides are required. Adds 1-3/4” to each side
- Shelf/shelves fence for inclined position
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Custom height chassis modification
- Condensate heated pan with fan
- Casters

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com




**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X


**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

**STANDARD: MURO H11-1 SELF SERVE – SELF CONTAINED**


**PLAN VIEWS**

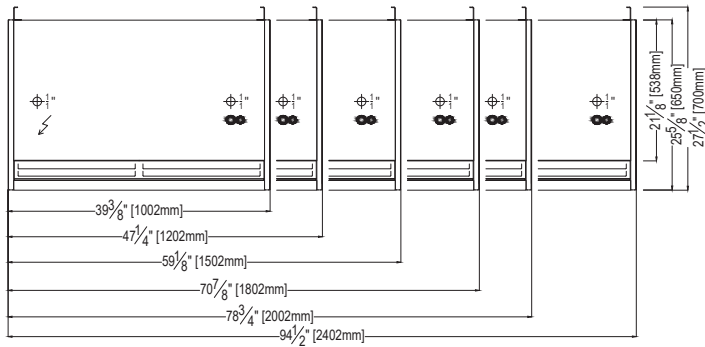


**FRONT ELEVATIONS:  
(CUSTOMER SIDE)**

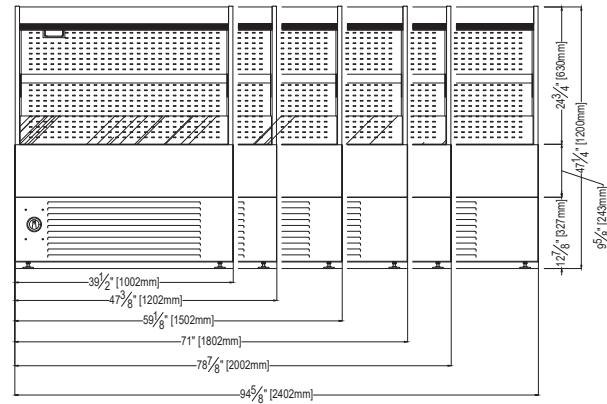

**STANDARD: MURO H11-1 A90SQ PLAN VIEW**

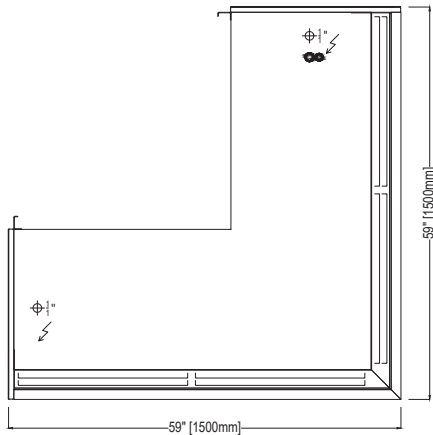

**STANDARD: MURO H11-1 A90SQ FRONT ELEVATION (CUSTOMER SIDE)**

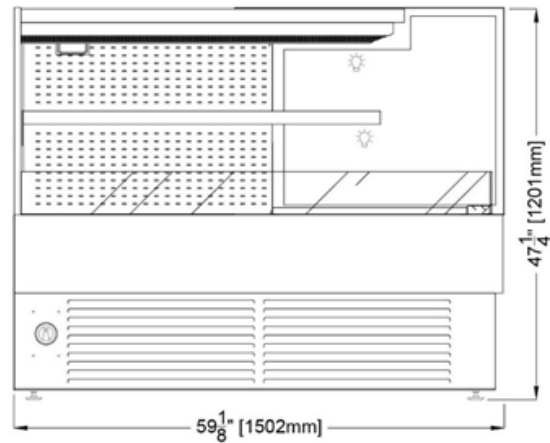

**ELECTRICAL LEGEND**

|                                                                                    |                     |
|------------------------------------------------------------------------------------|---------------------|
|  | REFRIGERATION LINES |
|  | DRAIN               |
|  | POWER               |

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com




**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X


**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

**STANDARD: MURO H11-1 & MURO H11-2 – SELF CONTAINED: BOTTOM MOUNT (BM)**  
**SECTION VIEWS**

**MURO H11-1**  
**SELF CONTAINED: BM**

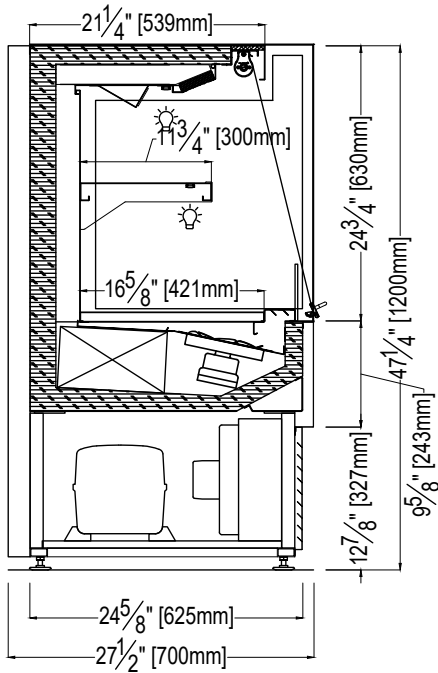

**MURO H11-2**  
**SELF CONTAINED: BM**

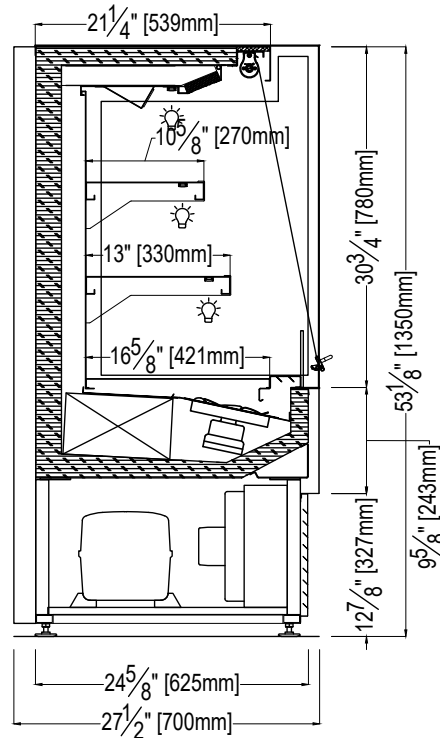

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com




**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X


**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

**STANDARD: MURO H11-1 A90X – STANDARD REMOTE CONDENSING UNIT**

**PLAN VIEWS**

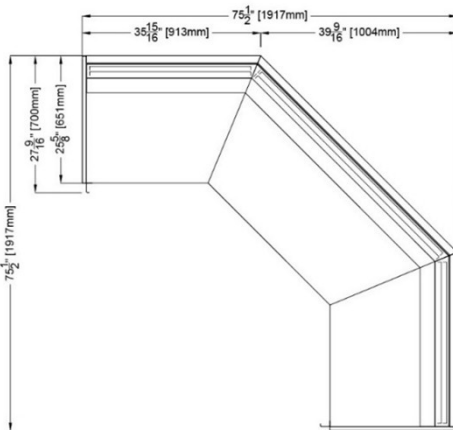


**FRONT ELEVATIONS:  
(OPERATOR SIDE)**

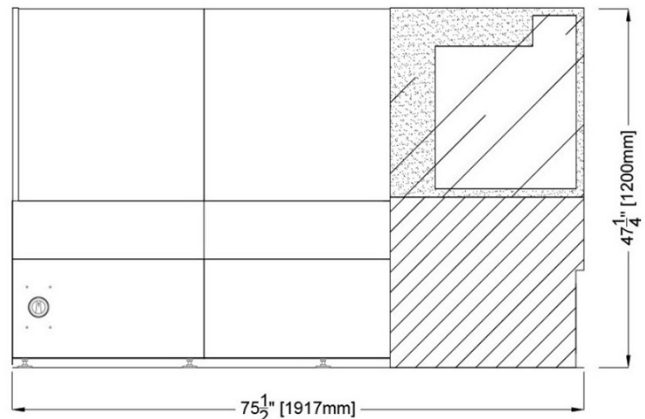


**SECTION VIEWS**

**MURO H11-1 A90X**

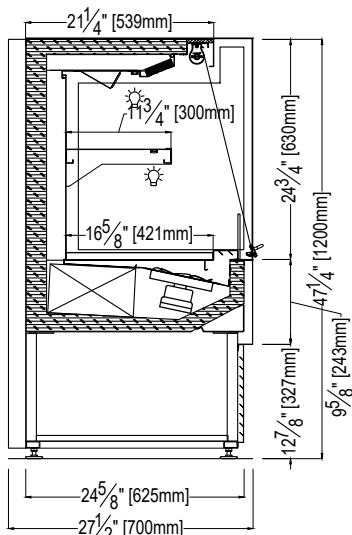

**MURO H11-2 A90X**

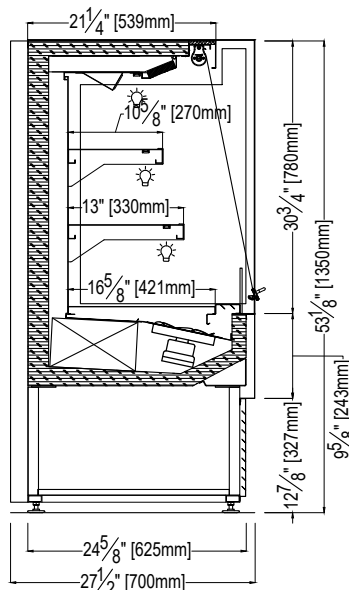

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com


**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X

**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X


**OPTIONALS:**

**MURO H11-1 & MURO H11-2 - SELF CONTAINED: BOTTOM MOUNT (BM) – ROLL DOWN SHUTTER WITH LOCK SECTION VIEWS**

**MURO H11-1 SELF CONTAINED:  
BM – NIGHT SHUTTER W/ LOCK**

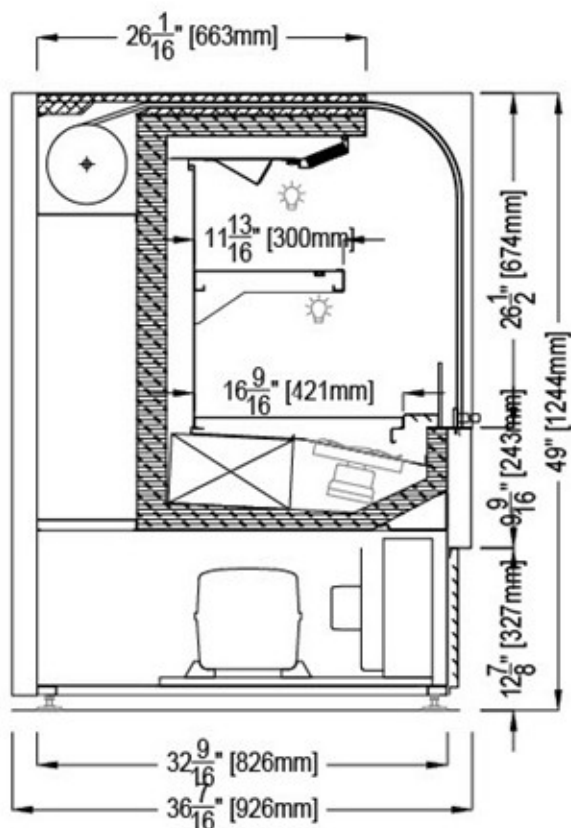

**MURO H11-2 SELF CONTAINED:  
BM – NIGHT SHUTTER W/ LOCK**

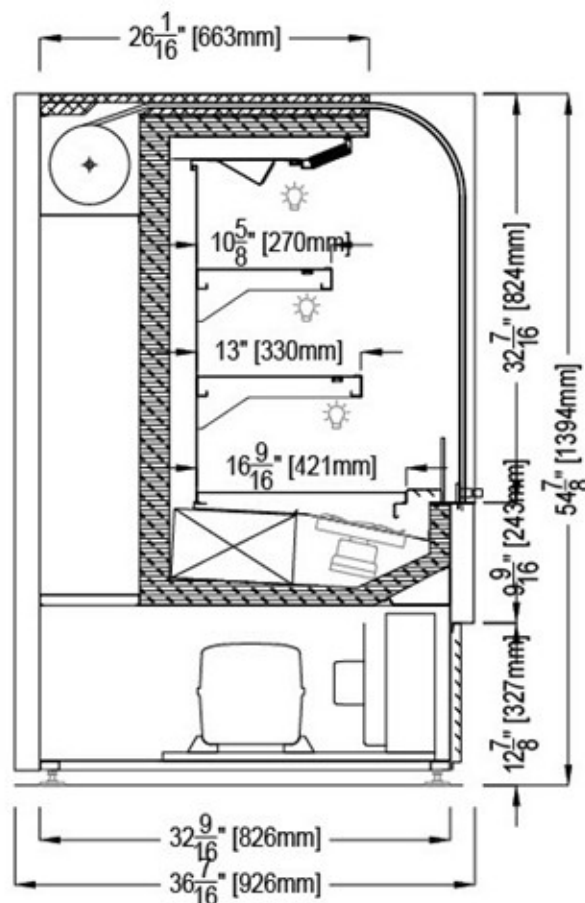

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.


OSCARTEK®  
 512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X


**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

**OPTIONALS: MURO H11-1 & MURO H11-2 – REMOTE CONDENSING UNIT**  
**SECTION VIEWS**

**MURO H11-1  
REMOTE CONDENSING UNIT**

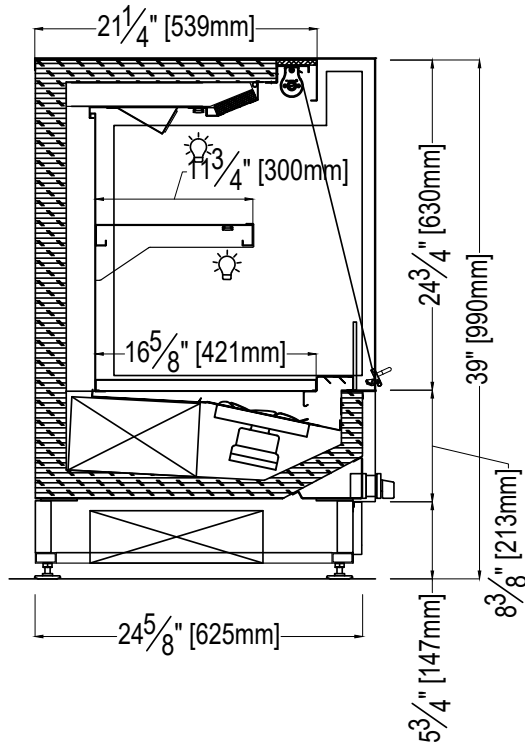

**MURO H11-2  
REMOTE CONDENSING UNIT**

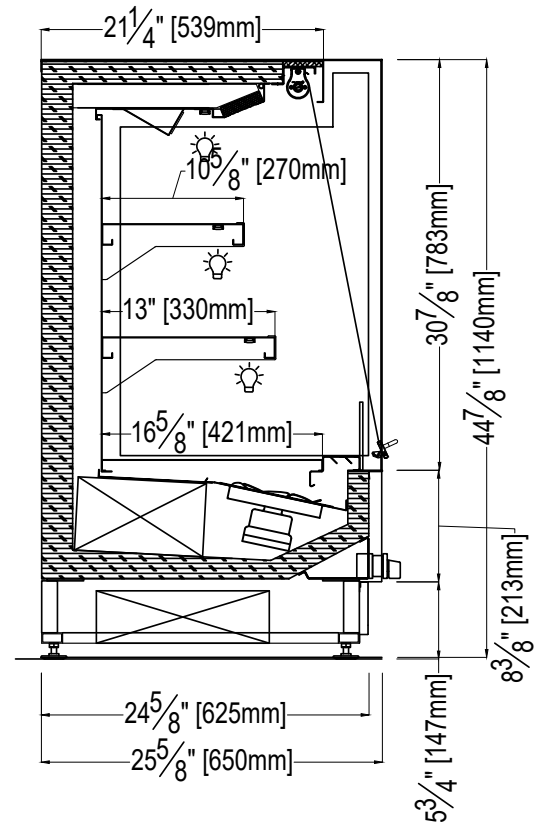

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X


**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

**OPTIONALS:**


**MURO H11-1 & MURO H11-2 – REMOTE CONDENSING UNIT WITH BACK SHELVING**

**SECTION VIEWS**

**MURO H11-1: REMOTE CONDENSING UNIT W/ BACK SHELVING**

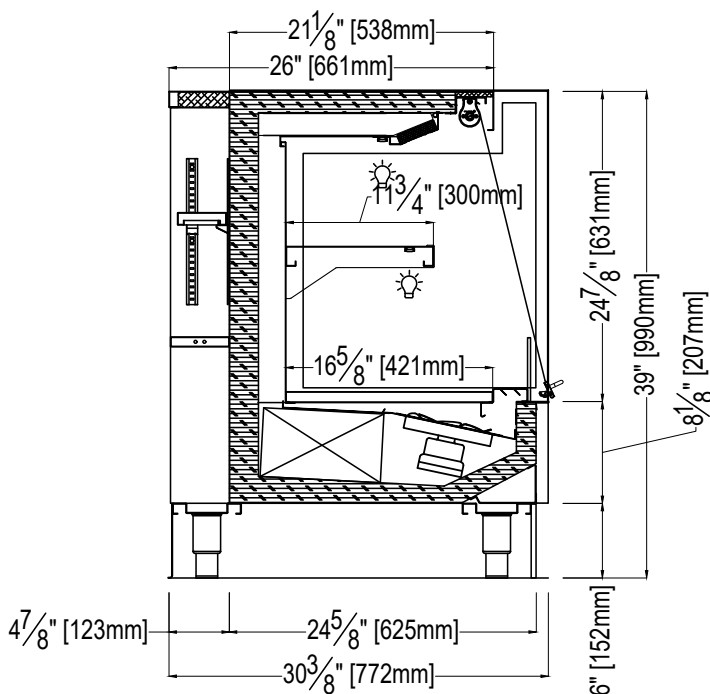

**MURO H11-2: REMOTE CONDENSING UNIT W/ BACK SHELVING**

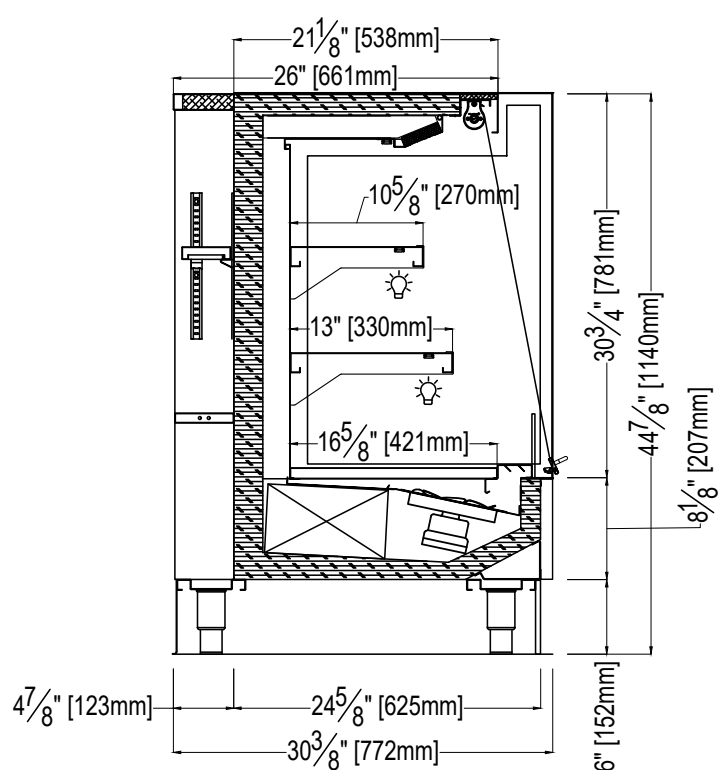

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com


**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X

**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X


**OPTIONALS:**

**MURO H11-1 & MURO H11-2 – SELF CONTAINED REAR MOUNT (RM) WITH BACK SHELVEING**  
**SECTION VIEWS**

**MURO H11-1: SELF CONTAINED  
RM W/ BACK SHELVEING**

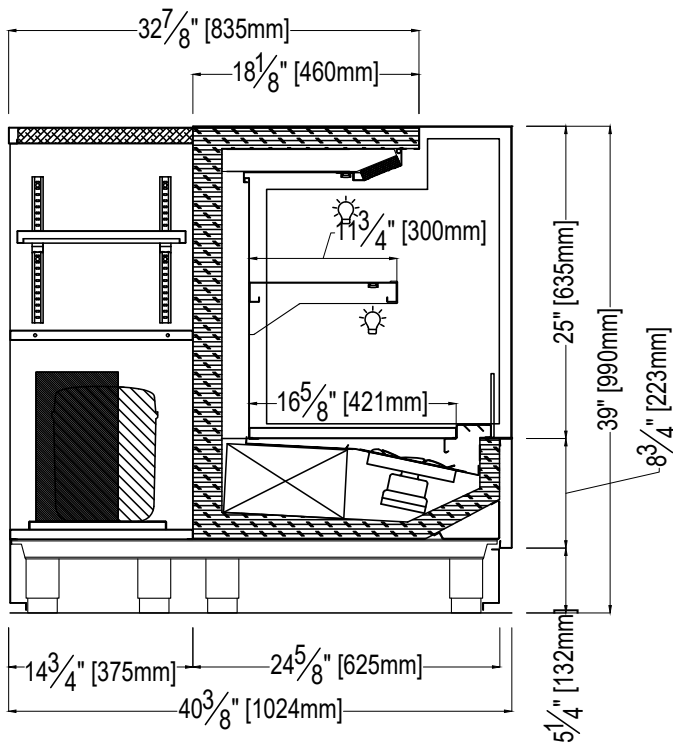

**MURO H11-2: SELF CONTAINED  
RM W/ BACK SHELVEING**

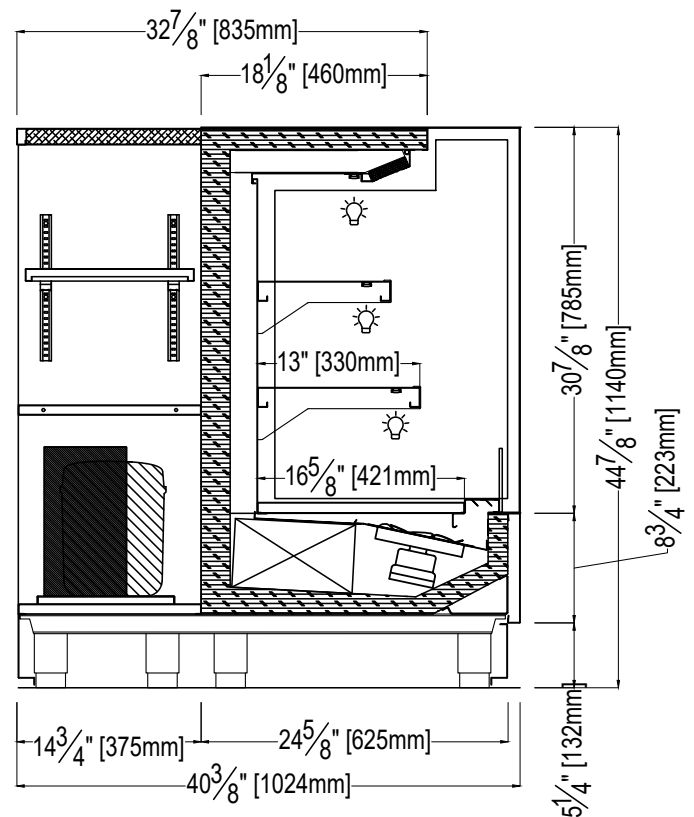

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X

**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

**MURO H11-1 SELF SERVE AIR SCREEN REFRIGERATION**

| TECHNICAL FEATURES                                                                         |                 | MODELS                                               |                                                     |                                                     |                                                     |
|--------------------------------------------------------------------------------------------|-----------------|------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
|                                                                                            |                 | MURO H11-1-1000<br>(MUROH11391S)                     | MURO H11-1-1200<br>(MUROH11471S)                    | MURO H11-1-1500<br>(MUROH11591S)                    | MURO H11-1-1800<br>(MUROH11711S)                    |
| External Dimensions (L-D-H)<br>Inches-MM                                                   | Inches<br>MM    | * 39 3/8" - 27 9/16" - 47 1/4"<br>*1002 - 701 - 1201 | *47 1/4" - 27 9/16" - 47 1/4"<br>*1202 - 701 - 1201 | *59 1/8" - 27 9/16" - 47 1/4"<br>*1502 - 701 - 1201 | *70 7/8" - 27 9/16" - 47 1/4"<br>*1802 - 701 - 1201 |
| Crated Dimensions (L-D-H)<br>Inches-MM                                                     | Inches<br>MM    | 46" - 33" - 54"<br>1168 - 838 - 1371                 | 55" - 33" - 54"<br>1397 - 838 - 1371                | 66" - 33" - 54"<br>1676 - 838 - 1371                | 77" - 33" - 54"<br>1955 - 838 - 1371                |
| Operating Temperature                                                                      | °F              | 40°F                                                 | 40°F                                                | 40°F                                                | 40°F                                                |
| BTU's @ +14°F Evap<br>Temperature                                                          | **BTU'S         | **3800                                               | **4500                                              | **5200                                              | **5800                                              |
| Electric Supply                                                                            | (V/Ph/Hz)       | 208-220/1/60                                         | 208-220/1/60                                        | 208-220/1/60                                        | 208-220/1/60                                        |
| Power Consumption                                                                          | (W/A)           | 1300/6.2                                             | 1350/6.5                                            | 1450/7.6                                            | 1500/7.9                                            |
| Climate Class                                                                              | °F/H.R.         | 75°F-55%RH                                           | 75°F-55%RH                                          | 75°F-55%RH                                          | 75°F-55%RH                                          |
| Refrigerant Gas                                                                            | Type            | R404A / R452A                                        | R404A / R452A                                       | R404A / R452A                                       | R404A / R452A                                       |
| Pipe Size (Inches)                                                                         | Suction, Liquid | 1/2" Suction, 1/4" Liquid                            | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          |
| Net Weights                                                                                | Lb              | 200                                                  | 240                                                 | 265                                                 | 330                                                 |
| Crated Weights                                                                             | Lb              | 280                                                  | 320                                                 | 345                                                 | 410                                                 |
| *DIMENSIONS ARE WITH POLISHED S/S SIDES                                                    |                 |                                                      |                                                     |                                                     |                                                     |
| **ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT. |                 |                                                      |                                                     |                                                     |                                                     |

**MURO H11-1 SELF SERVE AIR SCREEN REFRIGERATION**

| TECHNICAL FEATURES                                                                         |                 | MODELS                                              |                                                     |                                                     |                                                     |
|--------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
|                                                                                            |                 | MURO H11-1-2000<br>(MUROH11791S)                    | MURO H11-1-2400<br>(MUROH11941S)                    | MURO H11-1-A90SQ<br>(MUROH1190SQ1S)                 | MURO H11-1-A90X                                     |
| External Dimensions (L-D-H)<br>Inches-MM                                                   | Inches<br>MM    | *78 3/4" - 27 9/16" - 47 1/4"<br>*2002 - 701 - 1201 | *94 1/2" - 27 9/16" - 47 1/4"<br>*2402 - 701 - 1201 | *59 1/8" - 27 9/16" - 47 1/4"<br>*1502 - 701 - 1201 | *75 1/2" - 27 9/16" - 47 1/4"<br>*1917 - 701 - 1201 |
| Crated Dimensions (L-D-H)<br>Inches-MM                                                     | Inches<br>MM    | 84" - 33" - 54"<br>2133 - 838 - 1371                | 101" - 33" - 54"<br>2565 - 838 - 1371               | 66" - 33" - 54"<br>1676 - 838 - 1371                | 84" - 84" - 54"<br>2134 - 2134 - 1371               |
| Operating Temperature                                                                      | °F              | 40°F                                                | 40°F                                                | 40°F                                                | 40°F                                                |
| BTU's @ +14°F Evap<br>Temperature                                                          | **BTU'S         | **6500                                              | **7500                                              | **6500                                              | **9000 @ +10°F                                      |
| Electric Supply                                                                            | (V/Ph/Hz)       | 208-220/1/60                                        | 208-220/1/60                                        | 208-220/1/60                                        | 208-220/1/60                                        |
| Power Consumption                                                                          | (W/A)           | 1600/8.0                                            | 1900/8.8                                            | 1600/8.0                                            | 1950/10.0                                           |
| Climate Class                                                                              | °F /H.R.        | 75°F-55%RH                                          | 75°F-55%RH                                          | 75°F-55%RH                                          | 75°F-55%RH                                          |
| Refrigerant Gas                                                                            | Type            | R404A / R452A                                       | R404A / R452A                                       | R404A / R452A                                       | R404A / R452A                                       |
| Pipe Size (Inches)                                                                         | Suction, Liquid | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          |
| Net Weights                                                                                | Lb              | 375                                                 | 460                                                 | 375                                                 | 460                                                 |
| Crated Weights                                                                             | Lb              | 455                                                 | 540                                                 | 455                                                 | 540                                                 |
| *DIMENSIONS ARE WITH POLISHED S/S SIDES                                                    |                 |                                                     |                                                     |                                                     |                                                     |
| **ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT. |                 |                                                     |                                                     |                                                     |                                                     |

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com



**MURO H11-1 MODELS:** MURO H11-1-1000, MURO H11-1-1200, MURO H11-1-1500, MURO H11-1-1800, MURO H11-1-2000, MURO H11-1-2400, MURO H11-1-A90SQ, MURO H11-1-A90X

**MURO H11-2 MODELS:** MURO H11-2-1000, MURO H11-2-1200, MURO H11-2-1500, MURO H11-2-1800, MURO H11-2-2000, MURO H11-2-2400, MURO H11-2-A90SQ, MURO H11-2-A90X

| MURO H11-1 SELF SERVE AIR SCREEN REFRIGERATION                                             |                 |                                                      |                                                     |                                                     |                                                     |
|--------------------------------------------------------------------------------------------|-----------------|------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| TECHNICAL FEATURES                                                                         |                 | MODELS                                               |                                                     |                                                     |                                                     |
|                                                                                            |                 | MURO H11-1-1000<br>(MUROH11391S)                     | MURO H11-1-1200<br>(MUROH11471S)                    | MURO H11-1-1500<br>(MUROH11591S)                    | MURO H11-1-1800<br>(MUROH11711S)                    |
| External Dimensions (L-D-H)<br>Inches-MM                                                   | Inches<br>MM    | * 39 3/8" - 27 9/16" - 47 1/4"<br>*1002 - 701 - 1201 | *47 1/4" - 27 9/16" - 47 1/4"<br>*1202 - 701 - 1201 | *59 1/8" - 27 9/16" - 47 1/4"<br>*1502 - 701 - 1201 | *70 7/8" - 27 9/16" - 47 1/4"<br>*1802 - 701 - 1201 |
| Crated Dimensions (L-D-H)<br>Inches-MM                                                     | Inches<br>MM    | 46" - 33" - 54"<br>1168 - 838 - 1371                 | 55" - 33" - 54"<br>1397 - 838 - 1371                | 66" - 33" - 54"<br>1676 - 838 - 1371                | 77" - 33" - 54"<br>1955 - 838 - 1371                |
| Operating Temperature                                                                      | °F              | 40°F                                                 | 40°F                                                | 40°F                                                | 40°F                                                |
| BTU's @ +14°F Evap<br>Temperature                                                          | **BTU'S         | **3800                                               | **4500                                              | **5200                                              | **5800                                              |
| Electric Supply                                                                            | (V/Ph/Hz)       | 208-220/1/60                                         | 208-220/1/60                                        | 208-220/1/60                                        | 208-220/1/60                                        |
| Power Consumption                                                                          | (W/A)           | 1300/6.2                                             | 1350/6.5                                            | 1450/7.6                                            | 1500/7.9                                            |
| Climate Class                                                                              | °F/H.R.         | 75°F-55%RH                                           | 75°F-55%RH                                          | 75°F-55%RH                                          | 75°F-55%RH                                          |
| Refrigerant Gas                                                                            | Type            | R404A / R452A                                        | R404A / R452A                                       | R404A / R452A                                       | R404A / R452A                                       |
| Pipe Size (Inches)                                                                         | Suction, Liquid | 1/2" Suction, 1/4" Liquid                            | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          |
| Net Weights                                                                                | Lb              | 200                                                  | 240                                                 | 265                                                 | 330                                                 |
| Crated Weights                                                                             | Lb              | 280                                                  | 320                                                 | 345                                                 | 410                                                 |
| *DIMENSIONS ARE WITH POLISHED S/S SIDES                                                    |                 |                                                      |                                                     |                                                     |                                                     |
| **ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT. |                 |                                                      |                                                     |                                                     |                                                     |

| MURO H11-1 SELF SERVE AIR SCREEN REFRIGERATION                                             |                 |                                                     |                                                     |                                                     |                                                     |
|--------------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------|
| TECHNICAL FEATURES                                                                         |                 | MODELS                                              |                                                     |                                                     |                                                     |
|                                                                                            |                 | MURO H11-1-2000<br>(MUROH11791S)                    | MURO H11-1-2400<br>(MUROH11941S)                    | MURO H11-1-A90SQ<br>(MUROH1190SQ1S)                 | MURO H11-1-A90X                                     |
| External Dimensions (L-D-H)<br>Inches-MM                                                   | Inches<br>MM    | *78 3/4" - 27 9/16" - 47 1/4"<br>*2002 - 701 - 1201 | *94 1/2" - 27 9/16" - 47 1/4"<br>*2402 - 701 - 1201 | *59 1/8" - 27 9/16" - 47 1/4"<br>*1502 - 701 - 1201 | *75 1/2" - 27 9/16" - 47 1/4"<br>*1917 - 701 - 1201 |
| Crated Dimensions (L-D-H)<br>Inches-MM                                                     | Inches<br>MM    | 84" - 33" - 54"<br>2133 - 838 - 1371                | 101" - 33" - 54"<br>2565 - 838 - 1371               | 66" - 33" - 54"<br>1676 - 838 - 1371                | 84" - 84" - 54"<br>2134 - 2134 - 1371               |
| Operating Temperature                                                                      | °F              | 40°F                                                | 40°F                                                | 40°F                                                | 40°F                                                |
| BTU's @ +14°F Evap<br>Temperature                                                          | **BTU'S         | **6500                                              | **7500                                              | **6500                                              | **9000 @ +10°F                                      |
| Electric Supply                                                                            | (V/Ph/Hz)       | 208-220/1/60                                        | 208-220/1/60                                        | 208-220/1/60                                        | 208-220/1/60                                        |
| Power Consumption                                                                          | (W/A)           | 1600/8.0                                            | 1900/8.8                                            | 1600/8.0                                            | 1950/10.0                                           |
| Climate Class                                                                              | °F /H.R.        | 75°F-55%RH                                          | 75°F-55%RH                                          | 75°F-55%RH                                          | 75°F-55%RH                                          |
| Refrigerant Gas                                                                            | Type            | R404A / R452A                                       | R404A / R452A                                       | R404A / R452A                                       | R404A / R452A                                       |
| Pipe Size (Inches)                                                                         | Suction, Liquid | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          | 5/8" Suction, 5/16" Liquid                          |
| Net Weights                                                                                | Lb              | 375                                                 | 460                                                 | 375                                                 | 460                                                 |
| Crated Weights                                                                             | Lb              | 455                                                 | 540                                                 | 455                                                 | 540                                                 |
| *DIMENSIONS ARE WITH POLISHED S/S SIDES                                                    |                 |                                                     |                                                     |                                                     |                                                     |
| **ACTUAL BTU'S WILL VARY. YOU MUST RELY ON PRODUCTION DRAWINGS SUBMITTED PER EACH PROJECT. |                 |                                                     |                                                     |                                                     |                                                     |

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com

