



## ELECTRIC SALAMANDER BROILER

**IMPERIAL****ISB-36-E**

### ELECTRIC ELEMENT

- Two 3 KW incoloy heating elements.
- Independent left and right heating zones maximize function and performance.
- 208 and 240 volts, 3 phase operation

### EXTERIOR FEATURES

- Constructed using aluminized steel for maximum heat retention and heat distribution.
- Stainless steel front, sides and top.
- Welded and polished stainless steel seams.
- Mounts over IR and IHR Imperial ranges with mounting accessory.
- Can be wall or counter mounted.
- One year parts and labor warranty.

### BROILER RACK

- Chrome plated heavy duty rack.
- Loads and unloads easily.
- 4 positions with positive locking broiler carriage.
- Full width, large capacity for high production in peak hours.
- Cradle and carriage design for cooking foods directly on the rack.
- Spring balanced cradle assembly rolls out 10" (254 mm) for easy loading and unloading.
- Full width broiler pan has a full length pull handle. Pan removes easily for cleaning.

**MADE IN USA****IMPERIAL**


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | [imperialrange.com](http://imperialrange.com) | [imperialsales@imperialrange.com](mailto:imperialsales@imperialrange.com)

© 2025 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit [www.imperialrange.com](http://www.imperialrange.com) for specification updates



# ELECTRIC

## SALAMANDER BROILER

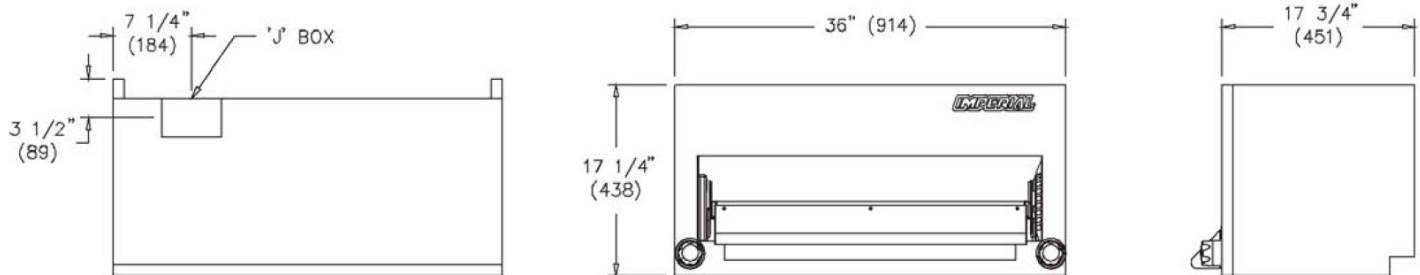

### SALAMANDER BROILER

MODEL	DESCRIPTION	DIMENSIONS	CRATED DIMENSIONS	ELEMENTS KW	ELEMENTS NUMBER	SHIP WEIGHT KG	SHIP WEIGHT LBS
ISB-36-E	SALAMANDER	36" W X 17 3/4" D X 17 1/4" H (914 X 451 X 438 MM)	38" W X 20" D X 21" H (965 X 508 X 533 MM)	3 KW ea.	2	95	210

### ELECTRICAL REQUIREMENTS

MODEL	TOTAL KM	VOLTS	PH	AMPS
ISB-36-E	6	208	3	25
	6	240	3	22
	6	480	3	11

### CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Legs are required for counter top installation. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.



MADE IN USA

### OPTIONS AND ACCESSORIES

- Wall mounting kit
- 4" (102 mm) leg kit for counter mounting
- Reinforcement channels to mount on range

