



A family company manufacturing in the USA

www.glastender.com



CS1FB60
Stainless steel doors, and top



Intertek Intertek

4004503

Conforms to NSF/ANSI STD 7 and UL STD 471

Certified to CSA STD C22.2 No. 120

Listed as NSF Standard 7

for open food as a display refrigerator

Standard Features

- Self-contained
- Stainless steel interior
- Locking doors
- LED interior lighting
- Heated mullion to minimize condensation
- Evaporator above compressor compartment to maximize storage capacity
- Three adjustable, coated-wire shelves per door section

| | |
|--------------------------|------------|
| Project: _____ | AIA# _____ |
| Item #: _____ Qty: _____ | SIS# _____ |
| Model #: _____ | |

Coolers Shallow Depth, One Zone, Front Serviced, Bar Profile

CS1FB

CS1FB52, CS1FB60, CS1FB72,
CS1FB84



Configurable Options

Temperature:

- Beer/Food - 34°F to 40°F
- White wine - 50°F to 55°F
- Red wine - 60°F to 65°F

Refrigeration Compartment

Location:

- Left or Right

Refrigeration Compartment

Cover Finish:

- Black vinyl-clad
- Unlaminated
- Stainless steel
- Jeweled stainless
- Laminated

Door Style & Finish (specify per door section):

- Black vinyl-clad
- Stainless steel
- Jeweled stainless
- Laminated
- Unlaminated
- Glass, black vinyl-clad
- Glass, stainless steel
- Glass, jeweled stainless
- Glass, laminated

Door Hinge Location (specify for each door):

- Left or Right

Door Handle:

- Signature
- Pull-tab
- Tube

Top Style:

- No finished top
- Stainless top

Left and Right Side Finish:

- Black vinyl-clad
- Stainless steel

Back Finish:

- Galvanized steel
- Stainless steel

LED Lighting Style:

- Bright white (7,000k)
- Warm white (3,500k)
- Amber (2,700k)
- Blue

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Coolers - Shallow Depth, One Zone, Front Serviced, Bar Profile

Specifications

| | | CS1FB52 | CS1FB60 | CS1FB72 | CS1FB84 |
|-------------------------|--------------------|---|---------|---------|---------|
| Dimensions | Length | 52" | 60" | 72" | 84" |
| | Number of Sections | 2 | 2 | 3 | 3 |
| | Door Opening | 16" | 20" | 16" | 20" |
| Electrical | Electrical Supply | 120V, 1 phase, 60 Hz, dedicated 15A circuit required | | | |
| | Full Load Amps | 3.5 | 3.5 | 3.5 | 3.5 |
| | Plug Type | 8 foot NEMA 5-15P grounded cord and plug which exits the back of refrigeration compartment* | | | |
| Refrigeration | Refrigerant | R290 - 125 grams, 4.41 oz., 0.28 pounds | | | |
| | Compressor | Reciprocating, 1/6 HP, 1300 BTUH, 0.11 Tons | | | |
| | Heat Rejection | 1430 BTUH | | | |
| Operating Range | | 34°F (1°C) to 40°F (4°C) | | | |
| Plumbing | | Automatic condensate evaporator; no drain connection required † | | | |
| Weight Bearing Capacity | | Countertops and other accessories should not exceed 500 pounds per door | | | |

Materials

- Stainless steel parts include: exterior sub-top, interior, front of cabinet, hinges, hinge and lock brackets, and optional legs
- Black vinyl-clad steel parts include: standard sides, doors and compressor cover
- Galvanized steel parts include: back and bottom



† Building conditions outside the guidelines of ASHRAE 55 and ASHRE 62.1 may need to be plumbed to a drain.

Capacities

| | CS1FB52 | CS1FB60 | CS1FB72 | CS1FB84 |
|--|---------|---------|---------|---------|
| 12 oz. bottles, cases | 8.1 | 10.6 | 12.8 | 16.6 |
| 750ml wine bottles | 77 | 102 | 121 | 162 |
| 1/2 barrel kegs | N/A | N/A | N/A | N/A |
| 1/6 barrel kegs | N/A | N/A | N/A | N/A |
| Capacity values below are per door/drawer section (750ml wine bottles) | | | | |
| Drawers | N/A | N/A | N/A | N/A |
| Upright pull-out | N/A | N/A | N/A | N/A |
| Horizontal pull-out | N/A | N/A | N/A | N/A |
| Combo pull-out | N/A | N/A | N/A | N/A |




5400 N Michigan Rd • Saginaw, MI • 48604-9780
 989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com


Printed in USA

Coolers - Shallow Depth, One Zone, Front Serviced, Bar Profile

Drawings

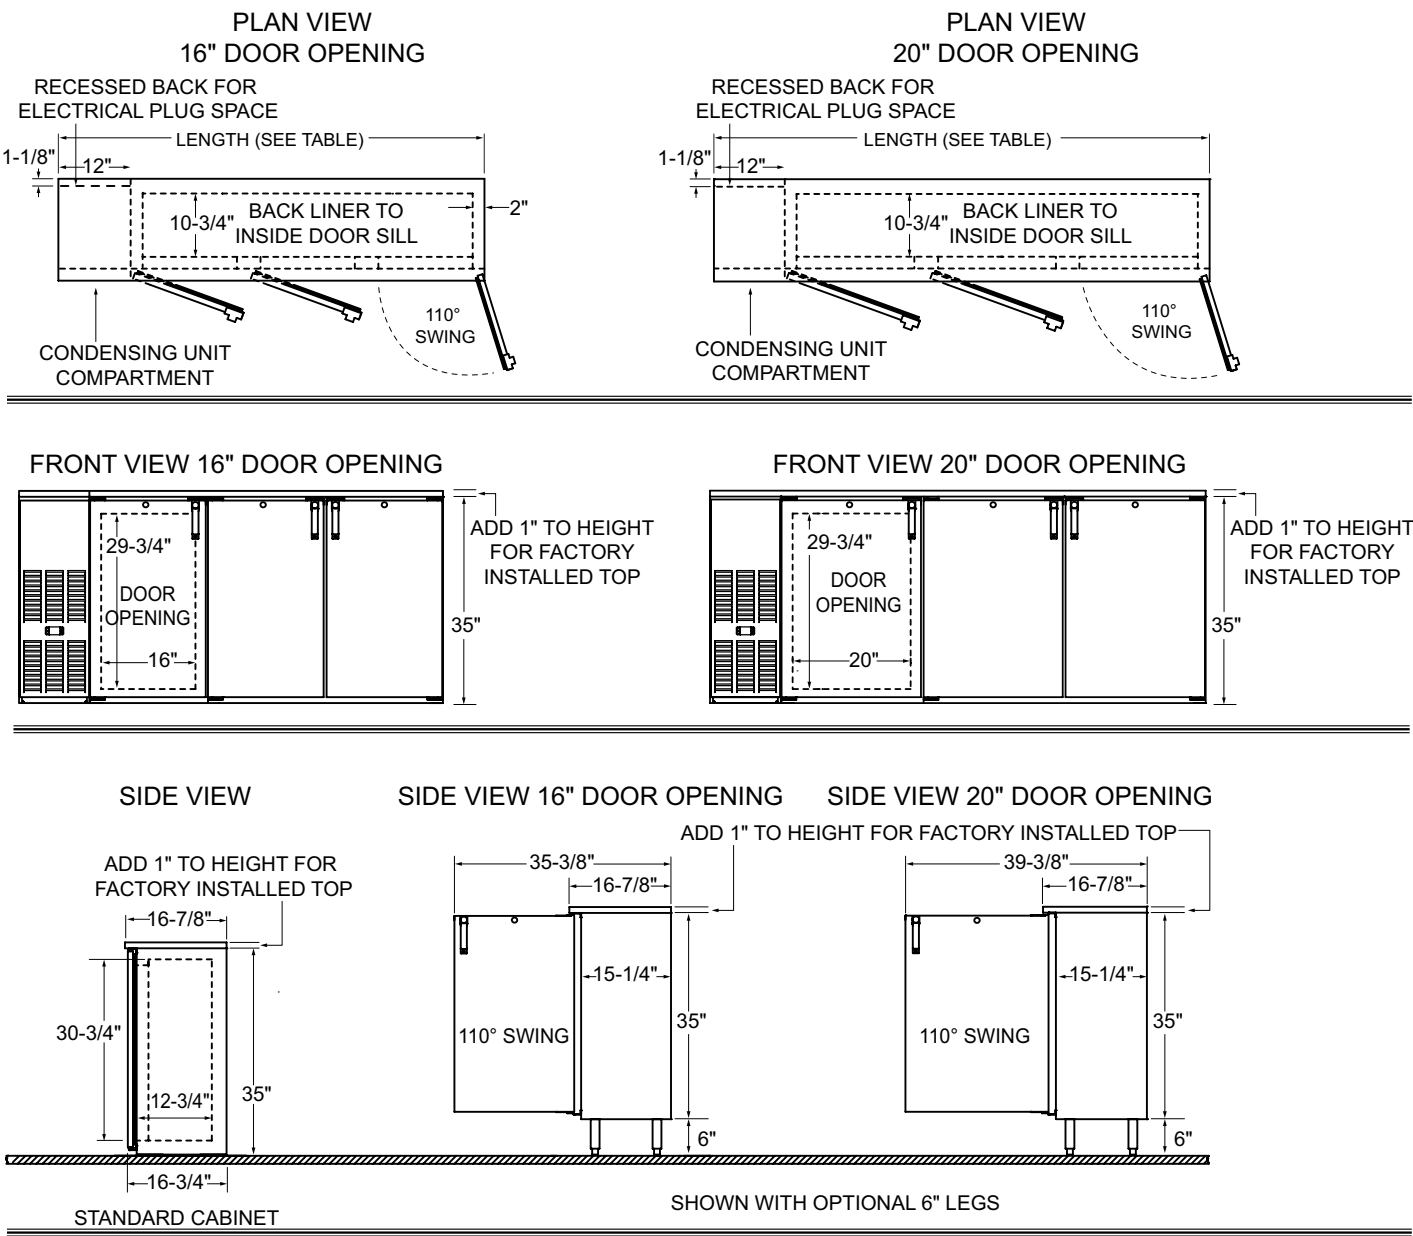

OPTIONAL LEGS AND CASTERS



5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA