

Enclosed Cabinet & Solid Rack



Standard Features & Benefits

- ◆ Non-insulated all purpose cabinet
- ◆ Holds 18" x 26", 18" x 14" trays and food boxes by the lip, extra wide guides hold trays more securely than other units
- ◆ Tray spacing on 1.5" or 1" centers
- ◆ Unit on 1" centers has non-tilt design guides to keep the pans from tilting when pulled out of rack
- ◆ Solid side rack great for complete flexibility for spacing and eliminates the potential of product damage
- ◆ 270-degree hinged door with stainless steel gravity latch and card clip. Latch on door can be pad locked
- ◆ Great for food delivery and storage
- ◆ APRSS is available with open top and bottom
- ◆ ECH has reinforced base and center support, and heavy duty wheels
- ◆ Available with exclusive "Kelmax Kote"
- ◆ *Lifetime Guarantee Against Rust*



ECH4018



ECH4018/CD

APSR4018

Options for All Welded:

- ☐ /RB Reinforced base
- ☐ /BK Caster brakes
- ☐ /CB Full perimeter bumper
- ☐ /6 6" Heavy duty polyurethane swivel plate casters
- ☐ /K Kelmax Kote
- ☐ /CD Clear Doors



1" Tray Guides are Non-Tilt

Model:

- ☐ EC
- ☐ EC-1
- ☐ ECH
- ☐ ECH-1
- ☐ APSR
- ☐ APSR-1
- ☐ APRSS
- ☐ APRSS-1

Job Name: _____

Qty: _____

Item: _____

814 Jordan Lane, Decatur, GA 30033
404-296-9080 1-800-810-9080 Fax: 404-296-3040

KELMAX
Equipment

Specifications:

CONSTRUCTION:

Constructed of Heavy Duty extruded Type 6063 primary aluminum, unit is all welded.

SIDEWALLS:

Welded to 1" x 2 1/2" channel. The compound guides are 1" or 1 1/2" on center with guides 5/8" x .090 thick. Tongue and groove panels are continuously welded for maximum strength.

TOP:

Aluminum double pan design formed with four lips down and welded.

BACK WALL:

.090 thick aluminum

BASE:

.125 aluminum formed with four lips down and welded

CASTERS:


Unit comes standard with a 5" x 1 1/2" plate caster bolted to the base.

DOOR:


Constructed of 1/8" thick aluminum panel with a full 270-degree opening. Door held closed with a stainless steel gravity latch.

HINGES:

Three (3) double knuckle S/S hinges are bolted to the door (NSF approved).

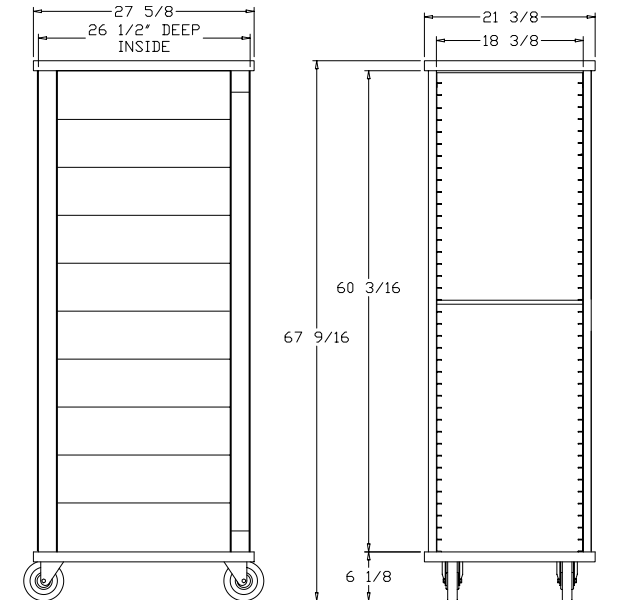

ECH4018/APSR4018

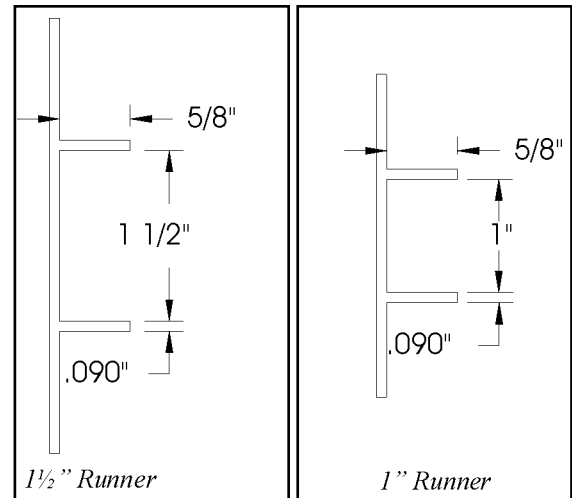

Model	Capacity	WxLxH	WGT	MODEL	CAPACITY	WxLxH	WGT
ENDLOAD ENCLOSED CABINETS - 1.5" SPACING				SOLID SIDE RACK - SOLID TOP AND BOTTOM - 1.5"			
EC1618	16	22x28x32	80	APSR1618/32	16	22x28x32	54
EC2418	24	22x28x44	95	APSR3218	32	22x28x56	78
EC3218	32	22x28x56	95	APSR4018	40	22x28x68	80
EC4018	40	22x28x68	105	SOLID SIDE RACK - SOLID TOP AND BOTTOM - 1"			
ECH4018	40	22x28x68	115	APSR2418-1	24	22x28x32	54
ENDLOAD ENCLOSED CABINETS - 1" SPACING				APSR4818-1	48	22x28x56	78
EC2418-1	24	22x28x32	95	APSR6018-1	60	22x28x68	80
EC3618-1	36	22x28x44	95	SOLID SIDE RACK - OPEN TOP AND BOTTOM - 1.5"			
EC4818-1	48	22x28x56	80	APRSS3618	36	22x28x62	55
EC6018-1	60	22x28x68	105	APRSS4018	40	22x28x68	60
ECH6018-1	60	22x28x68	115	SOLID SIDE RACK - OPEN TOP AND BOTTOM - 1"			
SIDELOAD ENCLOSED CABINETS - 1" SPACING				APRSS5418-1	54	22x28x62	55
EC3226	32	31x20x56	92	APRSS6018-1	60	22x28x68	60

KELMAX
Equipment

814 Jordan Ln. Decatur, GA 30033

404-296-9080 1-800-810-9080 Fax: 404-296-3040

www.kelmax.com