



# 12" X 20" INSULATED WARMER

MODELS: W-3Vi



The APW Wyott W-3Vi countertop warmer is perfect for holding pre-cooked foods at NSF safe temperatures. These units can be used with a variety of pan sizes or adapter plates for round insets. Serpentine shaped heating elements ensure heat is distributed evenly. 1-inch insulation keeps heat in the product and protects countertops. Thermostatic controls and knob guards are standard.

## OPTIONS

- Adapter plate with 2 holes for two 11 qt. insets
- Adapter plate with 3 holes for three 7 qt. insets
- Adapter plate with 4 holes for four 4 qt. insets

## WARRANTY

APW Wyott Warming Equipment is backed by a 1-year Parts and Labor warranty, including our “Enhanced Warranty” service that replaces new units with certain product issues through the convenience of direct factory shipments.

## W-3Vi FEATURES AT A GLANCE


- 22 quart capacity
- Designed to cook and hold precooked foods at NSF safe temperatures.
- Serpentine shaped heating elements that evenly distribute heat throughout the unit
- Steel element support stabilizes heating elements and reflects heat toward well
- Model is provided with knob guards
- 1-inch fiberglass insulation
- 1/2" rubber legs
- Heavy-duty stainless steel for long life
- Easy to clean.
- Thermostatically controlled
- Great for buffets, serving lines, back bars or back-of-the-house
- Pans and insets not included
- Wet use only

## CERTIFICATIONS

Certified by the following agencies:



## EQUIPMENT DIMENSIONS

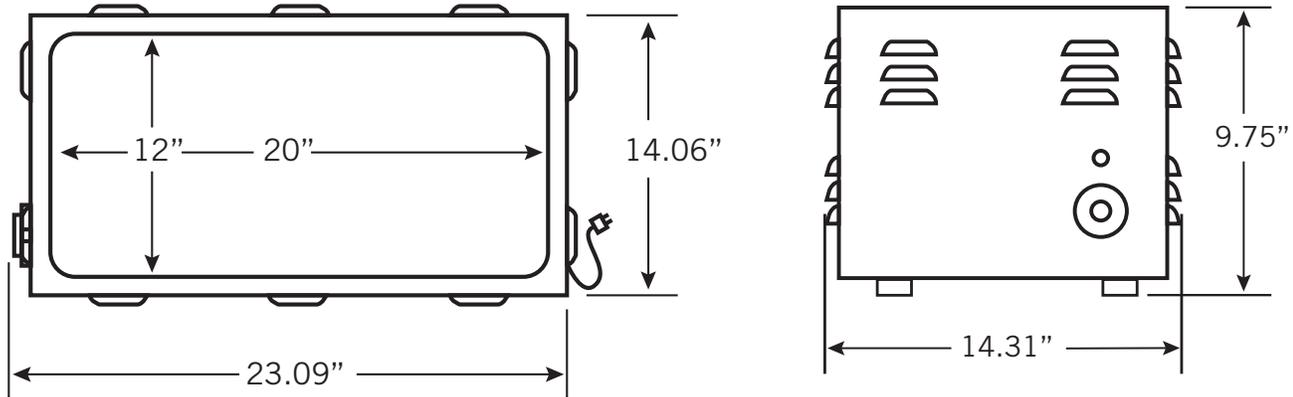

## MECHANICAL SPECIFICATIONS

Model #	Volts	Watts	NEMA Plug	Amps	Overall Dimensions Width x Height* x Depth** inches (mm)	Capacity Quarts	Ship Weight (lbs. / Kilos)
W-3Vi	120	1,200	5-15P	10	14.31" x 9.75" x 23.09" (363 x 248 x 590)	22	21 lbs. (9.52 kg)
W-3Vi	208/240/277	900/1,200/1,600	6-15P	4.3/5.0/5.7	14.31" x 9.75" x 23.09" (363 x 248 x 590)	22	21 lbs. (9.52 kg)

\*Height includes .5" rubber legs. \*\*Depth includes control knob.

## ELECTRICAL INFORMATION

Each unit is equipped with a 60" three wire grounded power cord which terminates with a standard three pronged male plug. The 120V unit uses a NEMA 5-15 plug. The 240V unit uses a NEMA 6-15P 90° plug.

## REQUIRED CLEARANCES

	Combustible
Left	N/A
Right	N/A
Back	N/A

Freight Class: 100  
FOB: Smithville, TN 37166

APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.