

NOTE: Faucet handles not included.

Optional Rinser Faucet

Installation Notes

- Unit does not provide a 1" air gap
- Must be installed with external backflow prevention to meet applicable federal, state, and local plumbing code requirements.
- Install in-line water pressure regulator (included)
- A separate shut-off valve is recommended (not included)

NOTE: Rinser faucets are not intended for use with towers mounted to a refrigerator due to risk of water line freeze up.





Optional Rinser Faucet Extension

Project:		AIA#
Item #:	Qty:	SIS#
Model #:		0.0,,

Mushroom Towers

MT	
Size: Specify the number of faucets from 4, 5, or 6	Hardware Finish: MF = Mirror finish PB = Polished brass

Standard Features

- 1/4" stainless steel shanks with 3/16" restriction lines
- · All stainless steel mirror finish faucets
- Available in mirror finish or polished brass* (*NOTE: Polished brass towers provided with mirror finish drain pan and polished brass perforated insert)
- Surface-mount, stainless steel drain pan with removable, perforated insert

Configurable Options

- 4, 5, or 6 faucets
- · Mirror or polished brass finish
- Air cooled for direct-draw system or glycol cooled for recirculating system
- Rinser faucet extension to the left or right of the drain pan; specify RFE option

Specifications

Materials

- Miscellaneous stainless steel and brass parts in dispensing tower
- 20 gauge stainless steel parts include drain pan and perforated inserts

Shank Sizes

• 1/4" I.D. with 3/16" fitting

Drains

1/2" tailpiece on drain pan

Rinser Faucet (optional)


- · Accepts 3/8" cold water lead
- 30 psi water pressure regulator included
- 1.2 gallons per minute

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com

Specifications subject to change without notice. For current specifications please visit our website.

Approval/Notes:

Drawings

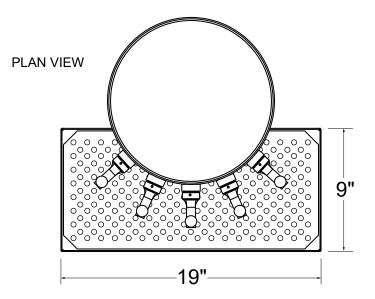

MT-5-MF SHOWN

