

CRATHCO Autofi

**No More Refilling.
No More Downtime.**

NEW I-PRO Autofill Lids designed
to instantly automate your current I-PRO
system and your beverage programs.



Ideal for Bag-in-Box
& In-House
Concentrate Programs



I-PRO AUTOFILL LID

CRATHCO

I-PRO AUTOFILL LID


Streamline Beverage Operations

Replace your current I-PRO lid with Crathco's Autofill Lid System. Your frozen offerings will always be fresh and available, enticing customers all day long.

- **Increased Visual Appeal** — always available, increasing sales
- **Enhanced Accuracy and Consistency** — automatically adds the perfect amount of water and syrup every time
- **Reduced Labor** — keeps staff focused on customers
- **Minimizes Training** — simple set-up and operation
- **Reduced Downtime** — manual re-filling is time-consuming
- **Increased Food Safety** — minimal exposure to product
- **Seamless Integration** — update existing equipment or your entire system
- **Waste Reduction** — prevents loss from incorrectly mixed product
- **Versatile** — perfect for BIB or in-house syrup programs



Crathco Autofill Lid
Puts a Lid on Labor

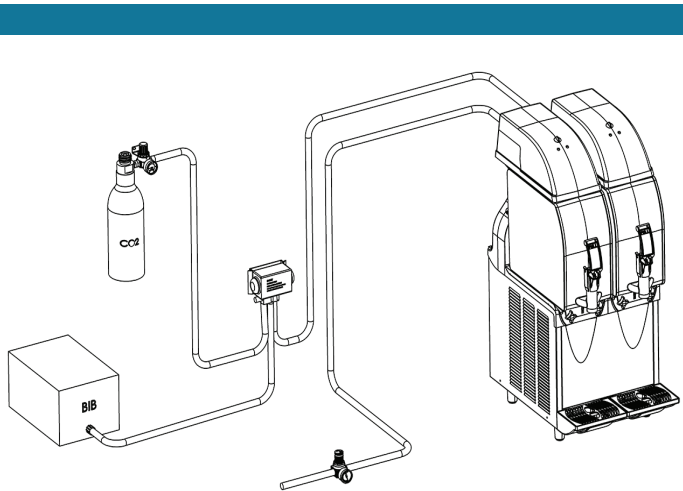

HERE'S HOW AUTOFILL WORKS

- Automatically senses drink volume through integrated lid sensor.
- When level falls below the probe, fill tube automatically refills the bowl with the perfect blend of BIB syrup and water.
- Post Mix process mixes beverage syrup in the bowl.
- "Sold Out" switch alerts operator (by red indicator lights) syrup is low or water connection needs attention.
- Beverage syrup ratio can be set to specific needs. Controlled by gas pressure and reducing valve.

SPECIFICATIONS

Model	Description	Electrical	Product Dimensions H x W x D	Shipping Dimensions H x W x D	Product Wt.	Shipping Wt.
LV600697	Autofill I-PRO AFI-P2-16, Black	120V 60hz 1ph 3A	10.6" x 7.4" x 15.8"*	18.3" x 19" x 11.3"	P2 - 6.86 lbs	16 lbs
LV606106	Autofill I-PRO AFI-P3-16, Black	120V 60hz 1ph 3A	10.6" x 7.4" x 15.8"*	19" x 24.8" x 11.3"	P3 - 10.29 lbs	22.7 lbs
LV606116	Body Assembly Autofill I-PRO Black	120V 60hz 1ph 3A	10.6" x 7.4" x 15.8"*	19" x 24.8" x 11.3"	4 lbs.	8 lbs.

Water Supply: Min 30psi/Max 120psi • CO₂: Max 60psi • Low Pressure Cut-Off: <5psi
Compatible with Existing I-PRO 2 Units — 2M w/Light Panel | 2E w/Light Panel | 3E w/Light Panel | 3M w/Light Panel
*Includes Water Level Probe