

Project Name:	
Location:	
Item #:	Qty:
Model:	

INTELLIGENT SERIES 22" MODULAR ICE MACHINES

MODEL:

MIM360N

MIM360NH





Designed to fit perfectly with the MIB310N Bin (sold seperately)

ELECTRIC -

115V / 60Hz / 1Ph (230V / 50-60Hz / 1Ph is available as an option) 6' (2m) NEMA 5-15P cord set inculded



NEMA 5-15P

3RD PARTY APPROVALS -



Certified to ANSI NSF 12









DOE 2018 Compliant

Meets Energy Star Guidelines

MAXX ICE WARRANTY (USA / CANADA) -

Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797

Maxx Ice Intelligent Series modular, air-cooled ice machines are designed for high volume ice production application. The modular units are compatible with most ice storage bins and beverage dispensers. Available in both full or half dice cubes, the stainless steel and black trim exterior features a hinged front panel for easy cleaning and servicing. The digital controls, vertical evaporator and proven ice making technology will deliver years of reliable ice production.

FEATURES AND CONSTRUCTION —

- Stainless steel, black trim exterior
- Narrow 22" width fits in tight places where space and height is limited
- Air-cooled compressor
- Programmable, user-friendly digital controls
- Digital screen displays ice machine status
- Automatic cleaning cycle and bin overflow prevention
- Power for unit also illuminates the internal LED light in storage bin (MIB310N - sold seperately)
- Hinged front panel for easy cleaning and service
- Units are stackable for increased ice production (optional adapter is required)

DAILY ICE PRODUCTION

OPERATING REQUIREMENTS


Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C) Water Temperature Range............. 41° to 90°F (5° to 32°C) Water Usage per 100 lbs of ice....... 13.12 Gallons (49.7L) Water Supply Line Connection........ 3/8" FPT


Water Pressure Range:


 Min PSI.......
 15
 Max PSI80*


 Min Bar
 1.0
 Max Bar5.5

*Above 80 PSI requires a regulator Energy Consumption per 100 lbs of ice:

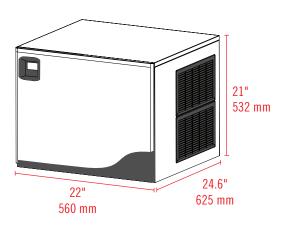

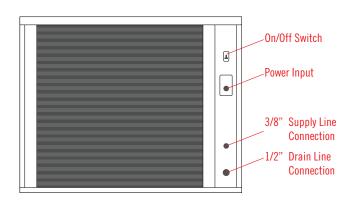

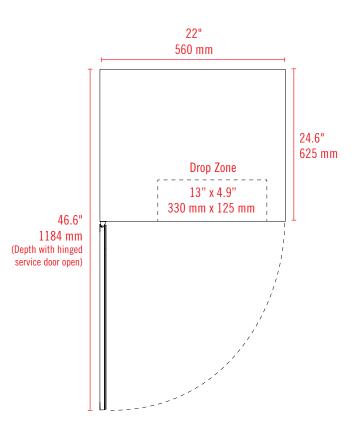

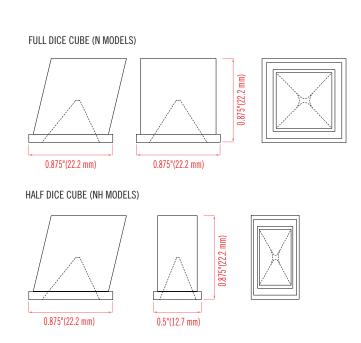

MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	COMPATIBLE MAXX ICE Storage bin	NET WEIGHT / Shipping Weight	AMP DRAW (Making / Harvesting)	REFRIGERANT And Charge Size	ELECTRICAL
MIM360N	22" x 24.6" x 21" (560 x 625 x 532 mm)	373 lbs (169 kg)	MIB310N	93 lbs (42 kg) 111.5 lbs (50.5 kg)	7.5A / 10.5A	R-404a 24.5oz (695g)	115V / 60Hz / 1Ph
MIM360NH	22" x 24.6" x 21" (560 x 625 x 532 mm)	361 lbs (164 kg)	MIB310N	93 lbs (42 kg) 111.5 lbs (50.5 kg)	7.5A / 10.5A	R-404a 24.5oz (695g)	115V / 60Hz / 1Ph

INSTALLATION -

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended