

STRATUS II Air SCREEN

PROJECT: _____

MODEL # SCRFC-SSII

SPECIFICATIONS

The Stratus II Air Screen SCRFC-SSII Series is designed as a self-select grab and go refrigerator in the front and with rear drop-in cold pans on the operator side. Vertical glass protector guard with stainless steel posts are mounted to a stainless steel workboard surface, along with a removable zip lite cutting board. Available with a choice of standard grade plastic laminate exterior ends.



Available lengths: ☐ 48" ☐ 72"

Available depths: ☐ 48"

Available heights: ☐ 54 5/8"



STANDARD FEATURES

- DOE 2017 Compliant
- Self-Contained Refrigeration
- Black Louvered Air Grill
- Standard Grade Laminate Exterior with T-Mold Edge Protection
- Stainless Steel #4 Finish Vertical Posts with Clipped Tempered Glass
- Stainless Steel Top with Removable Zip Lite Cutting Board
- Rear Drop-In Cold Pans (Mechanical) with Solid Access Panel on Operator Side (Slim Line)
- Brushed Aluminum Interior Ends
- Stainless Steel Perforated Interior Back Panel
- LED Top Canopy Light
- (1) Tempered Glass Shelf with LED Light
- Removable Stainless Steel Deck Pan with Hemmed Edge to Contain Spills
- Electronic Digital Control and Defrost Termination
- Red Indicator Light Alerts Operator if Condenser Requires Cleaning
- Digital Temperature Display
- 8' Cord and Plug
- ETL Listed in Accordance with UL 471 and NSF 7 Standards.
- Environmentally Safe Refrigerant
- 1 Year Parts and Labor Warranty
- Floor Drain Required
- 5 Year Compressor Warranty

OPTIONAL FEATURES

- ☐ Stainless Steel Exterior Finish with Standard T-Molding
 - ☐ #4 ☐ #6 ☐ #8
- ☐ Special Laminates
- ☐ Wood Veneers (Stained & Sealed)
- ☐ Casters (Increases Height by 4")
- ☐ Adjustable Legs (Consult Factory for Sizes)
- ☐ Corian® Top Stock Color
- ☐ Corian® Top Non-Stock Color
- ☐ Zodiac® Top Stock Color
- ☐ Zodiac® Top Non-Stock Color
- ☐ Top Horizontal Stainless Steel Shelf on Protector Guard
- ☐ Top Horizontal Corian® Shelf and Protector Guard
- ☐ Finished Back with Black Air Grill
- ☐ Stainless Steel Rear Air Grill

Air Screen Section

- ☐ Remote Refrigeration
- ☐ Black Styrene Step Sham
- ☐ Stainless Steel Step Sham
- ☐ Stainless Steel Shelf
- ☐ Mirrored Polished Stainless Steel Interior Ends (#8 Finish)
- ☐ Mirrored Polished Stainless Steel Perforated Interior Back Panel (#8 Finish)
- ☐ Removable Locking Security Panels
- ☐ Pull Down #23 Econo Frost Night Curtain
- ☐ Thermometer



CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055



INDUSTRIES, INC.

v1.13

STRATUS II Air Screen

PROJECT: _____

TOLL FREE: 800-525-3692

MODEL # SCRFC-SSII

SELF - CONTAINED

MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
Cold Drop-In				1/5	115	2.4	5-15P		134A
SCRFC48R-SSII	48	48	54 5/8	1/2	115	11.3	5-20P	1850	134A
Cold Drop-In				1/5	115	2.4	5-15P		134A
SCRFC72R-SSII	72	48	54 5/8	3/4	115/208-230	8.7	L-14-20P	2750	134A

AMBIENT



MODEL	L	D	H	HP	VOLT	AMP	PLUG	WT	REFRIG.
Cold Drop-In				1/5	115	2.4	5-15P		134A
SCRFC48D-SSII	48	48	54 5/8	N/A	115	0.21	5-15P	1730	N/A
Cold Drop-In				1/5	115	2.4	5-15P		134A
SCRFC72D-SSII	72	48	54 5/8	N/A	115	0.31	5-15P	2630	N/A

REMOTE - REFRIGERATED

MODEL	BTU @ 20°F	VOLT	AMP	PLUG	WT	REFRIG.
SCRFC48R-SSII-RR	4140	115	1.13	5-15P	1730	Verify
SCRFC72R-SSII-RR	6590	115	1.65	5-15P	2630	Verify

GLYCOL

MODEL	BTU @ 20°F	VOLT	AMP	PLUG	WT	GPM	REFRIG.
SCRFC48R-SSII-RR-GL	4140	115	1.13	5-15P	1730	1.0	GLYCOL
SCRFC72R-SSII-RR-GL	6590	115	1.65	5-15P	2630	2.0	GLYCOL

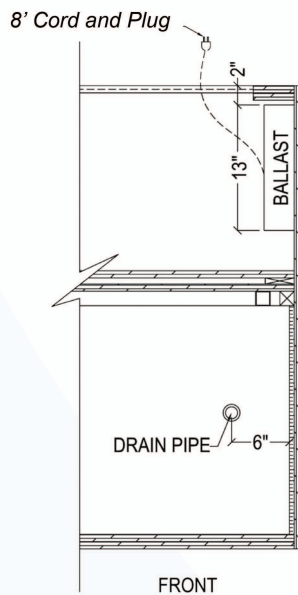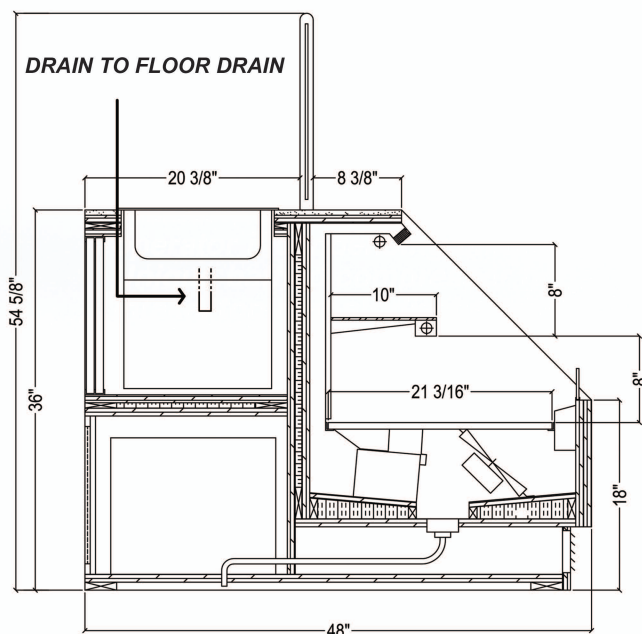

Conforms to UL Standard 471,
and NSF Standard 7; Certified
To CSA Standard C22.2 No.120



RPI refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2017 energy efficiency standards

Electrical & Plumbing locations

1. All Self-Contained, Remote and Glycol Units must be run to a floor drain at time of installation.
2. The SCRFC-SSII merchandiser is designed for use in stores where ambient temperatures and humidity do not exceed 75 Degrees Fahrenheit and 55% R.H. Locate away from direct sunlight, rapid air currents and extreme temperature changes. Exposure to air currents from ceiling fans, air conditioning diffusers, ovens, etc. will disrupt the case air curtain and refrigerated zone. Refrigerated Displays are designed to maintain pre-chilled products. Adding or loading warm products above 41 Degrees Fahrenheit can affect the temperature in the entire cabinet. Any adverse field conditions stated above will void warranty.

RPI in line with its policy to continually improve its products reserves the right to change materials and specifications without notice.

CALL TOLL FREE: 800-525-3692 (609-714-2330)

FAX: 609-714-2331 www.rpiindustries.com

220 ROUTE 70, MEDFORD, NJ 08055

RPI INDUSTRIES, INC. v1.13